


LED Light Engine Retrofit

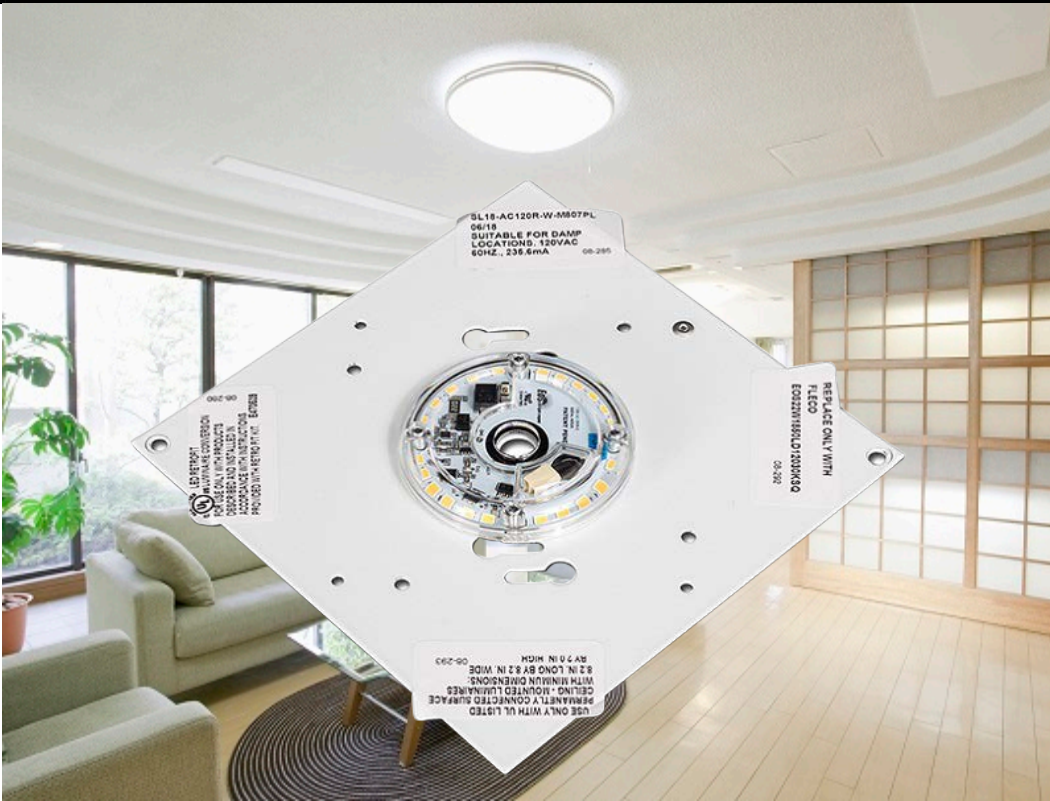

FEATURES

- Integrated powder-coated aluminum heat sink with ground wire
- TRIAC dimmable to 5% (forward & reverse phase)
- Easy installation with center or screw mounting
- Optical grade polycarbonate lens
- AC Driver-On-Board technology
- On-board line surge protection
- 12" 18 AWG leads

APPLICATION

- For use in retrofitting flush mounted fixtures at least 6 In. in diameter to LED technology.
 - Replaces the sockets and bulbs inside flush mount lights
- ❖ Optional MOV ground surge protection



SKU#	Kelvin	Lumens	Size	Wattage	Voltage	DLC?	Operating Temp	Life Hours	Warranty
PLT-50068	4000	1000	6 In.	12	120	No	-40 to 50° C	50,000	5 Years

SPECIFICATIONS

DIMMABLE	YES
SAFETY RATING	ETL/UL DAMP LOCATION
COLOR	COOL WHITE
LIFE HOURS	50,000
CRI	80
FINISH	WHITE
HOUSING	ALUMINUM
LENS	POLYCARBONATE
MAX LENS TEMP	176°F
LENGTH	6.06 IN.
WIDTH	6.06 IN.
WEIGHT	1 LB.

DIMENSIONS

