

# Series SKD

2"W Low Profile LED Surface Mount



## FEATURES & SPECIFICATIONS

### INTENDED USE

Full body micro silhouette makes a bold statement with a minimal design in brushed nickel powder coated finish (consult factory for other finishes). Scaled to the LED module the matte white diffuser surrounds the LEDs for soft lighting. Brushed nickel fixture can be surface mounted on wall or ceiling or pendant mounted with specially engineering cable mounting kit.

### SIZE L x W x D in inches

- 22.5" or 46" or 92"L x 2"W x 2.6"D
- 22.5" or 46" or 92"L x 3"W x 3"D

### MATERIALS & FEATURES

- Fully assembled housing is formed and welded, 22 gauge steel, chemically treated to resist corrosion and enhance paint adhesion
- Available in brushed nickel. Consult for other finishes
- Available with smooth frosted lens
- Clean body - No knock-outs on sides or ends
- Knock-outs on back accept standard electrical fittings (by others) Consult factory for other locations
- Dimming ballast options available (consult factory for availability and system compatibility)



### MOUNTING

Surface mount or Pendant mount.  
Horizontal or Vertical.

### TYPICAL OPTIONS AND ACCESSORIES

Whips, hanging kits, and cord sets. See options page at the end of the T02Strip section, or contact factory for more details.

### ACCESSORIES


- SKD-HC301WH - 5' cable kit w/white canopy\*
- SKD-HC301BN - 5' cable kit w/brushed nickel\*
- SKD-HC501BN - 4' Cable Mounting Kit\*

\*Includes canopy for cable only and a canopy for cable & power chord.


## ORDERING INFORMATION

Example: SKDFR24LE12W1200LDMV40KWH

### 2FT - STANDARD

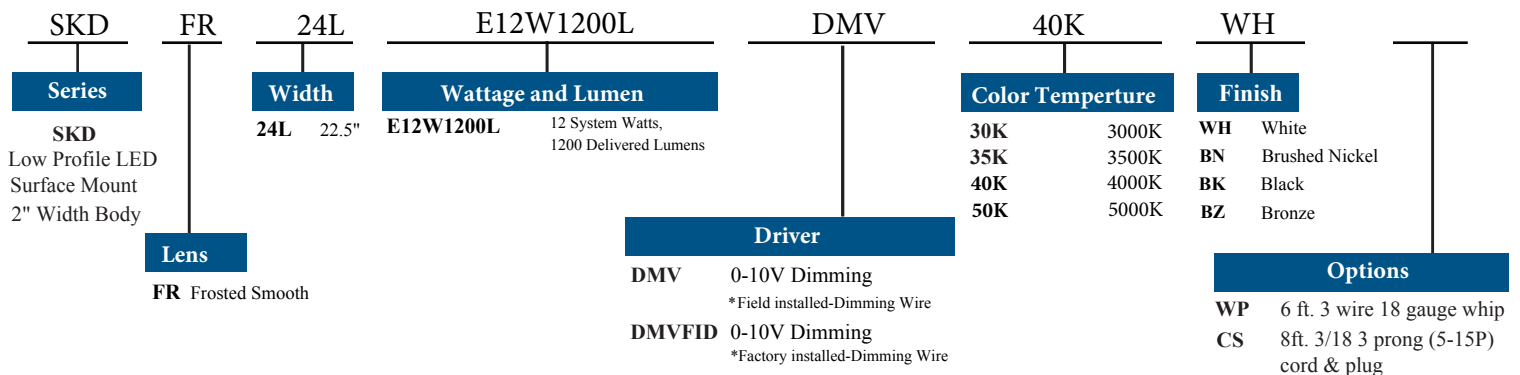

### 2FT - HIGH OUTPUT

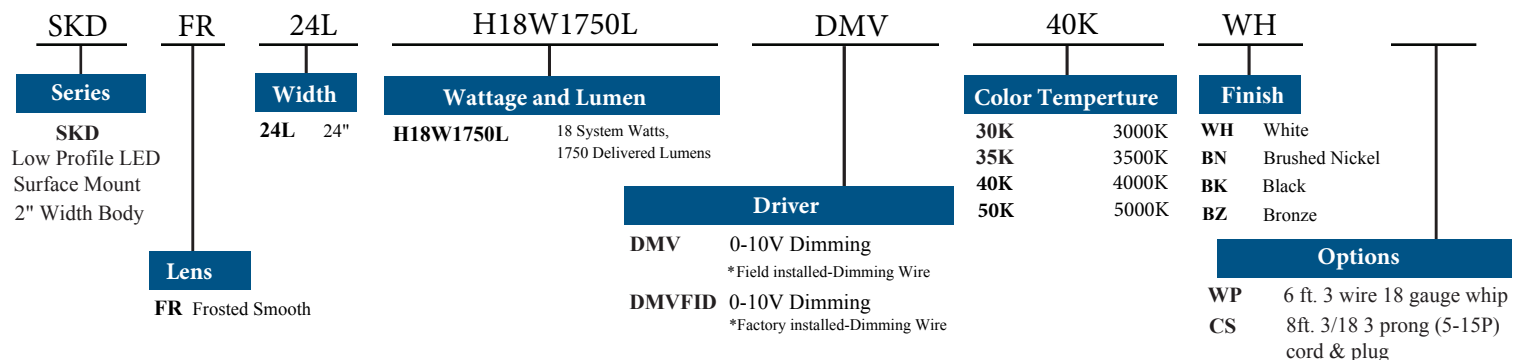

SKD-HC301WH - 5' cable kit w/white canopy\*  
SKD-HC301BN - 5' cable kit w/brushed nickel\*  
SKD-HC501BN - 4' Cable Mounting Kit\*

\*Includes canopy for cable only and a canopy for cable & power chord.



# Series SKD

3"W Low Profile LED Surface Mount



Example: SKDWB MW 48L E48W4800L DMV 40K BN

## 4FT - STANDARD

|  |                                  |             |   |  |  |  |
|--|----------------------------------|-------------|---|--|--|--|
| <b>SKDWB</b>                                   | <b>MW</b>                        | <b>48L</b>  | <b>E48W4800L</b>  | <b>DMV</b>   | <b>40K</b>   | <b>BN</b>  |
| <b>Series</b>                                  |                                  | <b>Size</b> | <b>Wattage and Lumen</b>                                | <b>Driver</b>  | <b>Color Temperature</b>   | <b>Finish</b>  |
| SKDWB  |                                  | 48L 46"     | <b>E32W3450L</b> 32 System Watts, 3450 Delivered Lumens | DMV 0-10V Dimming<br>*Field installed-Dimming Wire             | <b>30K</b> 3000K<br><b>35K</b> 3500K<br><b>40K</b> 4000K<br><b>50K</b> 5000K | <b>WH</b> White<br><b>BN</b> Brushed Nickel<br><b>BK</b> Black<br><b>BZ</b> Bronze |
| Low Profile LED Surface Mount<br>3" Width Body | <b>Lens</b>                      |             | <b>E48W4800L</b> 48 System Watts, 4800 Delivered Lumens | <b>DMVFID</b> 0-10V Dimming<br>*Factory installed-Dimming Wire |  | <b>Options</b>   |
|  | MW White Lens<br>FR Frosted Lens |             | <b>E57W5400L</b> 57 System Watts, 5400 Delivered Lumens |  |  | WP 6 ft. 3 wire 18 gauge whip<br>CS 8ft. 3/18 3 prong (5-15P) cord & plug          |

## 4FT - HIGH OUTPUT

|  |                                  |             |   |  |  |  |
|--|----------------------------------|-------------|---|--|--|--|
| <b>SKDWB</b>                                   | <b>MW</b>                        | <b>48L</b>  | <b>R72W7000L</b>  | <b>DMV</b>   | <b>40K</b>   | <b>BN</b>  |
| <b>Series</b>                                  |                                  | <b>Size</b> | <b>Wattage and Lumen</b>                                | <b>Driver</b>  | <b>Color Temperature</b>   | <b>Finish</b>  |
| SKDWB  |                                  | 48L 46"     | <b>R72W7000L</b> 72 System Watts, 7000 Delivered Lumens | DMV 0-10V Dimming<br>*Field installed-Dimming Wire             | <b>30K</b> 3000K<br><b>35K</b> 3500K<br><b>40K</b> 4000K<br><b>50K</b> 5000K | <b>WH</b> White<br><b>BN</b> Brushed Nickel<br><b>BK</b> Black<br><b>BZ</b> Bronze |
| Low Profile LED Surface Mount<br>3" Width Body | <b>Lens</b>                      |             |   | <b>DMVFID</b> 0-10V Dimming<br>*Factory installed-Dimming Wire |  | <b>Options</b>   |
|  | MW White Lens<br>FR Frosted Lens |             |   |  |  | WP 6 ft. 3 wire 18 gauge whip<br>CS 8ft. 3/18 3 prong (5-15P) cord & plug          |

## 8FT - STANDARD

|  |                                  |             |  |  |  |  |
|--|----------------------------------|-------------|--|--|--|--|
| <b>SKDWB</b>                                   | <b>MW</b>                        | <b>96L</b>  | <b>E114W10800L</b>   | <b>DMV</b>   | <b>40K</b>   | <b>BN</b>  |
| <b>Series</b>                                  |                                  | <b>Size</b> | <b>Wattage and Lumen</b>   | <b>Driver</b>  | <b>Color Temperature</b>   | <b>Finish</b>  |
| SKDWB  |                                  | 96L 92"     | <b>H80W8000L</b> 80 System Watts, 8000 Delivered Lumens<br><b>E114W10800L</b> 114 System Watts, 10800 Delivered Lumens | DMV 0-10V Dimming<br>*Field installed-Dimming Wire             | <b>30K</b> 3000K<br><b>35K</b> 3500K<br><b>40K</b> 4000K<br><b>50K</b> 5000K | <b>WH</b> White<br><b>BN</b> Brushed Nickel<br><b>BK</b> Black<br><b>BZ</b> Bronze |
| Low Profile LED Surface Mount<br>3" Width Body | <b>Lens</b>                      |             |  | <b>DMVFID</b> 0-10V Dimming<br>*Factory installed-Dimming Wire |  | <b>Options</b>   |
|  | MW White Lens<br>FR Frosted Lens |             |  |  |  | WP 6 ft. 3 wire 18 gauge whip<br>CS 8ft. 3/18 3 prong (5-15P) cord & plug          |

## 8FT - HIGH OUTPUT

|  |                                  |             |   |  |  |  |
|--|----------------------------------|-------------|---|--|--|--|
| <b>SKDWB</b>                                   | <b>MW</b>                        | <b>96L</b>  | <b>R144W14000L</b>  | <b>DMV</b>   | <b>40K</b>   | <b>BN</b>  |
| <b>Series</b>                                  |                                  | <b>Size</b> | <b>Wattage and Lumen</b>                                    | <b>Driver</b>  | <b>Color Temperature</b>   | <b>Finish</b>  |
| SKDWB  |                                  | 96L 92"     | <b>R144W14000L</b> 144 System Watts, 14000 Delivered Lumens | DMV 0-10V Dimming<br>*Field installed-Dimming Wire             | <b>30K</b> 3000K<br><b>35K</b> 3500K<br><b>40K</b> 4000K<br><b>50K</b> 5000K | <b>WH</b> White<br><b>BN</b> Brushed Nickel<br><b>BK</b> Black<br><b>BZ</b> Bronze |
| Low Profile LED Surface Mount<br>3" Width Body | <b>Lens</b>                      |             |   | <b>DMVFID</b> 0-10V Dimming<br>*Factory installed-Dimming Wire |  | <b>Options</b>   |
|  | MW White Lens<br>FR Frosted Lens |             |   |  |  | WP 6 ft. 3 wire 18 gauge whip<br>CS 8ft. 3/18 3 prong (5-15P) cord & plug          |



# Series SKD

Low Profile LED Surface Mount



## DIMENSIONS

All dimensions are inches.

Specifications subject to change without notice.

