





FEATURES

- Offers grouping control with other panels within a 100-foot radius
- CCT adjustable panel with a range of 3000 to 5000 Kelvin
- Low-profile design is ultra-thin for seamless embedding
- Offers smooth dimming with a 0-10V controller
- UL rated for use in damp locations
- Come in a pack of (2) 2x2 panels
- Lay-in ready with seismic hooks
- Instant-ON light with no delay
- 2.4GHZ RF Wireless





SKU #	Kelvin	Lumens	Size	Wattage	Voltage	DLC?	Mounting	Life Hours	Warranty
PLT-11231	3000-5000	4400-4800	2x2	40	120-277	NO	CEILING	75,000	5 Years

ADDITIONAL PHOTOS

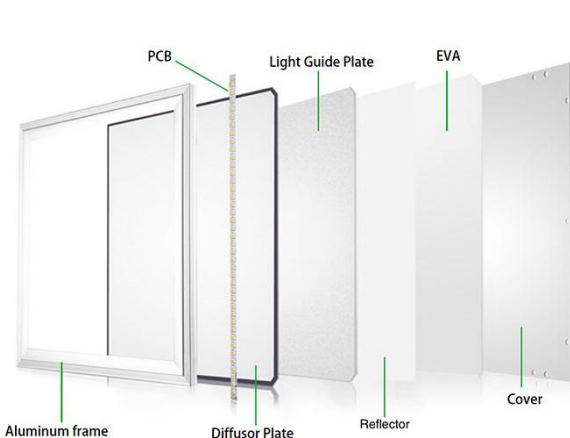

3000K 4000K 5000K

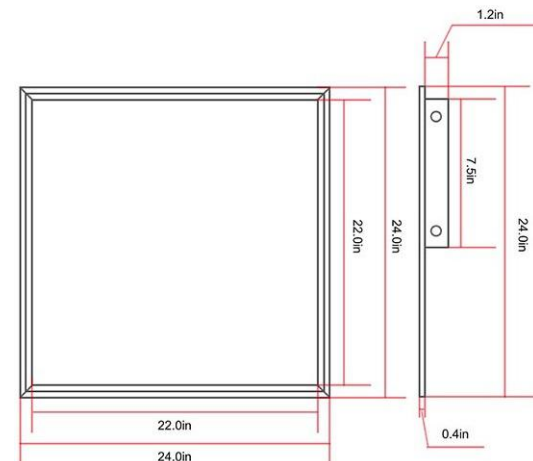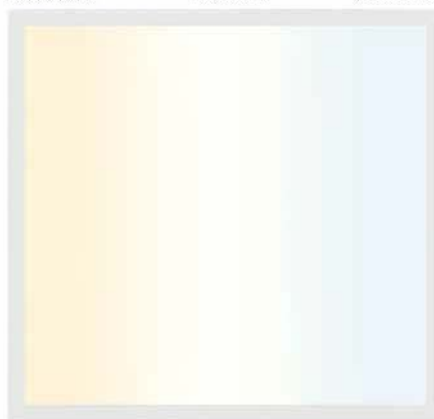

FEATURES

- Light-body aluminum alloy frame
- LED driver included
- Opaque Lens

SPECIFICATIONS

DIMMABLE	YES
DLC LISTED	NO
SAFETY RATING	UL
CRI	80
COLOR	HALOGEN WHITE TO DAYLIGHT
COLOR TEMPERATURE	3000 - 5000 KELVIN
LIFE HOURS	75,000
WATTAGE	40 WATT
LUMENS	4,400
VOLTAGE	120-277
FINISH.....	WHITE
HOUSING	ALUMINUM
MOUNTING	CEILING GRID MOUNT/SUSPENDED
LENS	OPAQUE
LENGTH	23.74 IN.
HEIGHT	0.39 IN.
WIDTH	23.74 IN.
WEIGHT	8.16 LBS.

TYPICAL APPLICATIONS

- Office / Conference Rooms
- Classrooms / Libraries
- Hotels / Lobbies

WARRANTY

Warranty

5 Years

FEATURE DETAILS



Wireless Dimming

- Smooth-Dimming
- Step-Dimming

Wireless TrueColors Tunable

- CCT Range Adjust
- 30KI 35KI 41K | 50K

Remote Timer Delay

- Set Brightness to Time

Remote Zonal Grouping