



SLP/SLW Series

Low Profile Pendant Lighting

FEATURES AND SPECIFICATIONS


PLT introduces LED low profile rectilinear Lighting that can be pendant mounted individually. Ideal for general lighting applications in both commercial and residential applications for circulation spaces, high impact areas and kitchen islands and home offices. The versatility and clean styling makes this an ideal choice in many applications.

SIZE W x L x H in inches

4ft. - 7.60" x 48" x 1.9"
8ft. - 7.60" x 96" x 1.9"

MOUNTING

Mount with 4' adjustable cable (2 for 4' unit or 8' unit, included). Consult factory for longer cables.

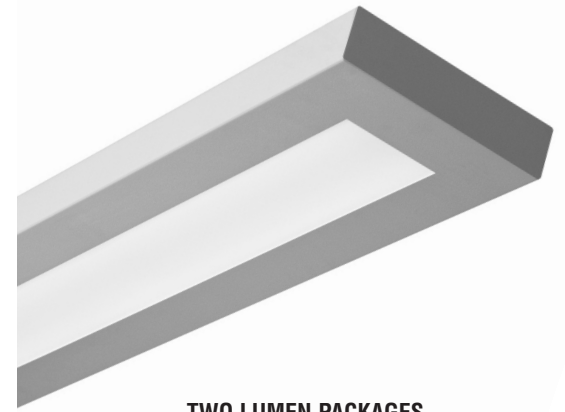

TWO LUMEN PACKAGES

Available in Standard Output and High Output lumen packages.

ORDERING INFORMATION

Example: SLPFR48LF48W4800LDMV40KWHHC401WH

4 FT-UP LIGHT ONLY or DOWN LIGHT ONLY

SLP	FR	48L	F48W4800L	DMV	40K	WH	HC401	WH
Series	Lens *	Size	Driver*		Finish		Finish	
SLP Low Profile Pendant SLW Low Profile Wall Mount	MW White Lens FR Frosted Lens	48L 48"	DMV 0-10V Dimming * For Field installed DMVFID 0-10V Dimming * Factory installed		WH White SL Metallic Silver RD Red IN Iron BK Black		WH White BK Black BKWH Black cord & White Canopy	
Wattage and Lumen			Color Temperature			Cable Kit		
F24W2400L 24 System Watts, 2400 Delivered Lumens			30K 3000K			HC401 4 ft. Cable kit with 3 wires Cord		
F48W4800L 48 System Watts, 4800 Delivered Lumens			35K 3500K			HC402 8 ft. Cable kit with 3 wires Cord		
			40K 4000K			HC4015W 4 ft. Cable kit with 5 wires Cord		
			50K 5000K			HC4025W 8 ft. Cable kit with 5 wires Cord		

4 FT-UP LIGHT and DOWN LIGHT

Example: SLPFR48LUF36WD18WDMV40KWHHC401WH

SLP	FR	48L	UF36WD18W	DMV	40K	WH	HC401	WH
Series	Lens *	Size	Driver		Finish		Finish	
SLP Low Profile Pendant SLW Low Profile Wall Mount	MW White Lens FR Frosted Lens	48L 48"	DMV 0-10V Dimming * For Field installed DMVFID 0-10V Dimming * Factory installed		WH White SL Metallic Silver RD Red IN Iron BK Black		WH White BK Black BKWH Black cord & White Canopy	
Wattage and Lumen			Color Temperature			Cable Kit		
UF12WD24W Up Light 12 System Watts, Down Light 24 System Watts, 3600 Delivered Lumens			30K 3000K			HC401 4 ft. Cable kit with 3 wires Cord		
UF18WD36W Up Light 18 System Watts, Down Light 36 System Watts, 5400 Delivered Lumens			35K 3500K			HC402 8 ft. Cable kit with 3 wires Cord		
UF36WD18W Up Light 36 System Watts, Down Light 18 System Watts, 5400 Delivered Lumens			40K 4000K			HC4015W 4 ft. Cable kit with 5 wires Cord		
			50K 5000K			HC4025W 8 ft. Cable kit with 5 wires Cord		