

# INSTALLATION INSTRUCTIONS FOR THE 4RB, 8RB - SERIES RETROFIT KIT

APPLICATION: General/Perimeter Lighting



← Strip fixture with T8 bulbs and ballast


- 1- Turn off power
- 2- Remove ballast/wireway cover from existing strip fixture



- 3- Remove lampholders and socket bars from existing strip housing
- 4- Remove ballast



4RB – 4ft - X1 LED retrofit kit →

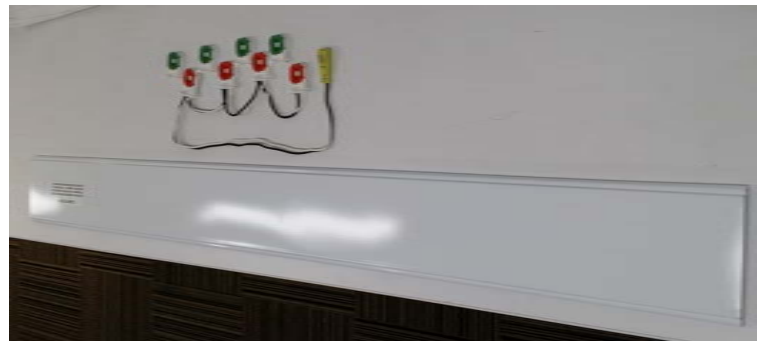

5- Install red sockets to one end of the fixture.



6- Install green sockets to the opposite end of the fixture.

7- Remove the knock-out in desired location. Bring the quick disconnect thru.



8- Re-Install the cover to the pan.

9- With the power still disconnected, install the LED lamps to the fixture. Then test the fixture.

**NOTE: 8RB IS MADE FROM (2) 4RB KITS COMBINED**