

HID LED 65W HIGH BAY BYP



PRO



65W REPLACES



175-250W
HID

70% Energy Savings

Intentional Uplighting

All High Bay and Low Bay products feature a ring of LEDs mounted around the base to provide visible uplighting for improved aesthetics and comfort



- Direct line voltage 100-277V - Not compatible with ballasts
- Designed for use in high bay applications
- Compatible with EX39 & E39 sockets
- Visible uplighting for improved aesthetics & comfort
- Exceptional efficacy 132 LPW
- Available in 4000K & 5000K CCT



50,000 H



UNIVERSAL



EFFICACY



WARRANTY




CRI (Ra)



SEMI DIRECTIONAL



SUITABLE FOR ALL HIGH BAY APPLICATIONS

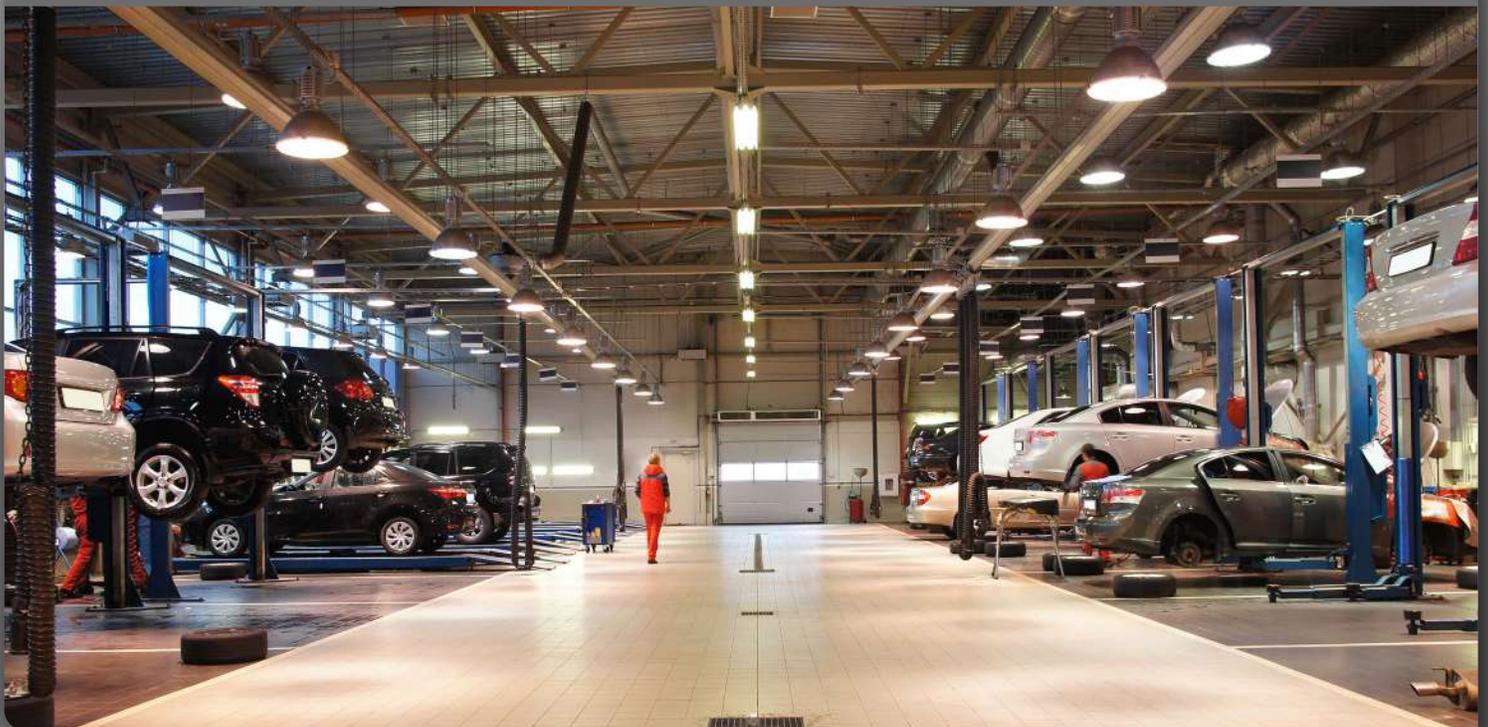

HID LED 65W HIGH BAY BYP

APPLICATIONS

General Lighting



Warehouse



Retail



SPECIFICATIONS

Product Model	98124 65HIDHB/840/BYP/EX39	98125 65HIDHB/850/BYP/EX39
Type	HID LED	HID LED
Base	EX39 (Compatible with E39)	EX39 (Compatible with E39)
Power (W)	65	65
Voltage - Frequency	100-277V	100-277V
Color Temp. (ANSI)	Cool White 4000K	Daylight 5000K
CRI (Ra) (typ.)	82	82
Fixture Lumens (lm)	8600	8600
Fixture Efficacy (LPW)	132	132
Beam Angle	110°	110°
Dimmable	No	No
Power Factor	0.9	0.9
Rated Lifetime - L70 (hrs.)	50,000	50,000
Temperature Rating	-4°F/-20°C - 113°F/45°C	-4°F/-20°C - 113°F/45°C
Dia. x MOL	7.7"x8.2" (196x209mm)	7.7"x8.2" (196x209mm)
Weight (lb. / g)	2.59lb. / 1175g	2.59lb. / 1175g

HID EQUIVALENCE

GREEN CREATIVE HID LED		Metal Halide		Mercury Vapor		High Pressure Sodium	
Power	Lumens	Power	Mean Lumens	Power	Mean Lumens	Power	Mean Lumens
65W	8600	175W	10,800	250W	11,000	100W	8000

* Suitable for damp locations. Not for use where directly exposed to weather or water

** Fixture lumens and efficacy based on Lithonia TGR 175MP A125 TB SCWA luminaire