

HID LED 20W WALL PACK E26



PRO



20W REPLACES



70-100W
HID

70% Energy Savings

- Direct line voltage 120-277V - Not compatible with ballasts
- Designed to replace traditional ED17 HID lamps
- Compatible with E26 sockets
- 350° rotatable base
- Available in 5000K
- Suitable for use in totally enclosed fixtures



50,000 H



UNIVERSAL



SEMI DIRECTIONAL



WARRANTY



CRI (Ra)




ENCLOSED*



HID LED WALL PACK PRODUCT FEATURES


Suitable for Enclosed Fixtures

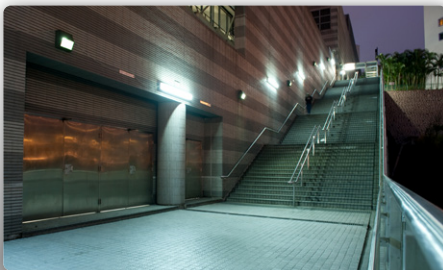

This HID LED lamp replaces a 70-100W HID and is suitable for use in totally enclosed fixtures. Its high lumen output and exceptional efficacy make it an ideal choice for outdoor wall pack applications.

CoolSink Technology

The CoolSink passive cooling system allows air to flow freely through the lamp. This unique design uses an increased cooling surface area to reduce the operating temperature of the LED and power supply, thus resulting in longer lamp life and lumen maintenance.



HID LED 20W WALL PACK E26

APPLICATIONS

General Lighting & Security



Loading Areas



Walkways & Entryways



SPECIFICATIONS

Product Model	98180 20HIDWP/850/277V/E26
Type	HID LED
Base	E26
Power (W)	20
Voltage - Frequency	120-277V
Color Temp. (ANSI)	Daylight 5000K
CRI (Ra) (typ.)	82
Bare Lamp lumens (lm)	2800
Bare Lamp efficacy (LPW)	140
Beam Angle	120°
Dimmable	No
Power Factor	0.9
Rated Lifetime - L70 (hrs.)	50,000
Temperature Rating	-4°F/-20°C - 95°F/35°C
Dia. x MOL	3.62"x5.35" (92x136mm)
Weight (lb. / g)	1.09lb. / 493g

HID EQUIVALENCE

GREEN CREATIVE HID LED		Metal Halide		Mercury Vapor		High Pressure Sodium	
Power	Lumens	Power	Mean Lumens	Power	Mean Lumens	Power	Mean Lumens
20W	2800	70W	3400	100W	3300	50W	3600

* Suitable for use in totally enclosed fixtures

** Suitable for damp locations. Not for use where directly exposed to weather or water

*** Suitable for use in horizontal applications