

60W
REPLACEMENT

- 90+**
CRI
- 7W**
Watts
- E26**
- 120V**
Voltage
- WET LOCATION**
- Dimmable**

High quality of light and color rendering (80+ CRI, 0+ R9),
Smooth dimming. Dimming lower than 20%.




ELECTRICAL SPECIFICATIONS


MODEL NO.	LUMEN	POWER	CCT	BEAM	CRI	PF	CBCP
SE-RCL06.1107-B	600LM	7W	2200K	300°	>80	>0.7	-

MECHANICAL SPECIFICATIONS

MODEL NO.	MEASURES	WEIGHT	OPERATIONAL TEMPERATURE	INNER BOX QTY	MASTER CARTON QTY
SE-RCL06.1107-B	2.52in X 5.52in	1.69oz	-20°C - 40°C	6pcs	24pcs

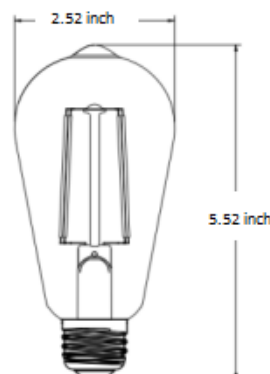

ST19 GOLDEN 7W

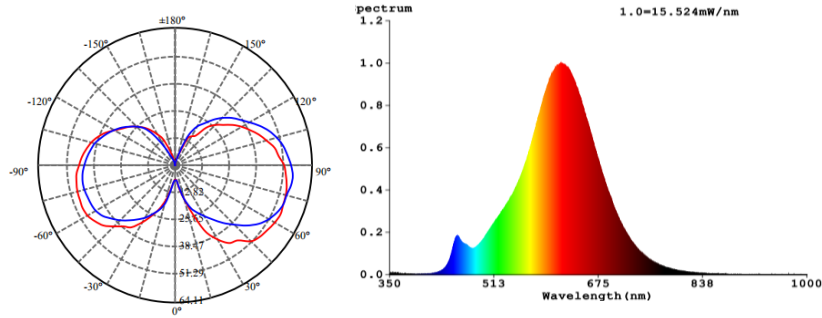


RA – CHART: >90

RA refers to the average value of R1 to R8.

R9 is the score that represents how accurately a light source will reproduce strong red colors. "Accurate" is defined as similarity to daylight or incandescent bulbs, depending on the color temperature.

R VALUES						
R1=83	R2=95	R3=92	R4=80	R5=83	R6=96	R7=80
R8=59	R9=19	R10=89	R11=79	R12=85	R13=86	R14=96

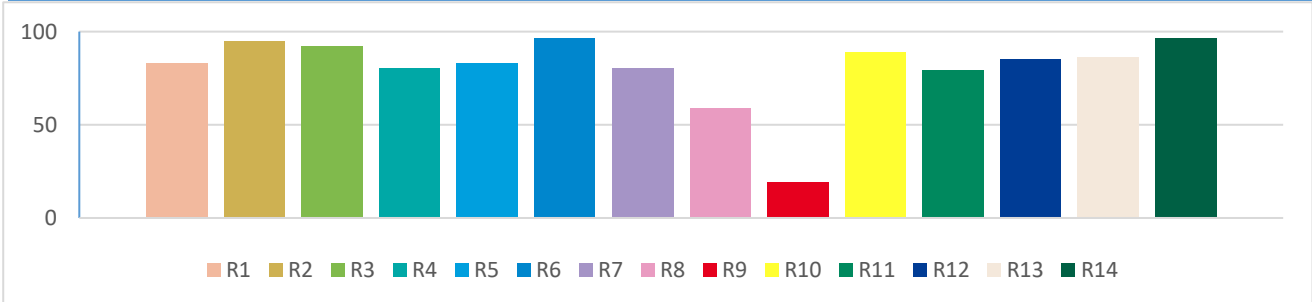

TM30 GRAPHIC

TM-30 deals with the color rendition of object.

R_f - a fidelity index that is similar to the commonly used CRI

R_g - a gamut index that provides information about saturation

Color vector graphic- a graphical representation of hue and saturation relative to a reference source.

