

75W
REPLACEMENT

90+
CRI

7W
Watts

E26

120V
Voltage

WET LOCATION

Dimmable

*High quality of light and color rendering (80+ CRI, 0+ R9),
Smooth dimming. Dimming lower than 20%.*




ELECTRICAL SPECIFICATIONS


MODEL NO.	LUMEN	POWER	CCT	BEAM	CRI	PF	CBCP
SE-RCL06.1107-A	800LM	7W	2700K	300°	>80	>0.7	-

MECHANICAL SPECIFICATIONS

MODEL NO.	MEASURES	WEIGHT	OPERATIONAL TEMPERATURE	INNER BOX QTY	MASTER CARTON QTY
SE-RCL06.1107-A	2.52in X 5.52in	1.69oz	-20°C - 40°C	6pcs	24pcs

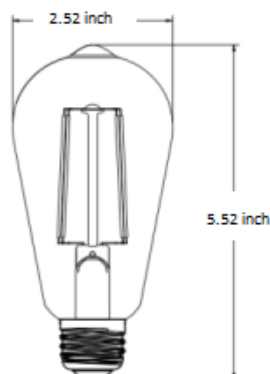


ST19 CLEAR 7W

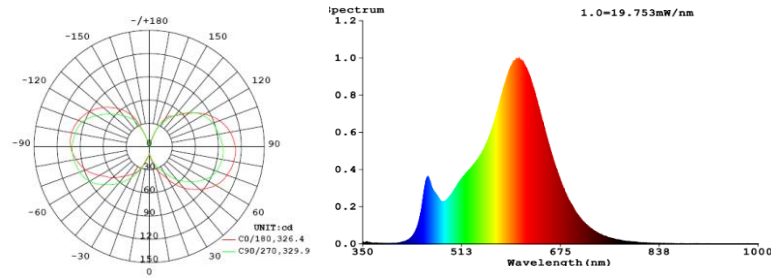

RA – CHART: >90

RA refers to the average value of R1 to R8.

R9 is the score that represents how accurately a light source will reproduce strong red colors. "Accurate" is defined as similarity to daylight or incandescent bulbs, depending on the color temperature.

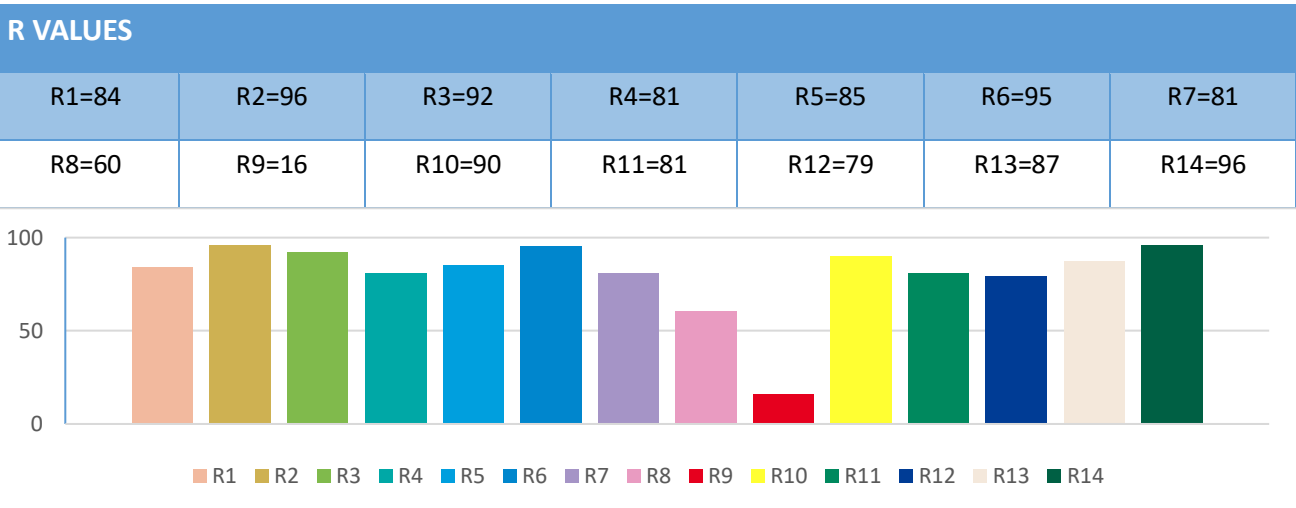

TM30 GRAPHIC

TM-30 deals with the color rendition of object.

R_f- a fidelity index that is similar to the commonly used CRI

R_g- a gamut index that provides information about saturation

Color vector graphic- a graphical representation of hue and saturation relative to a reference source.

