


**PATHMAX™ LED BOLLARDS**  
**CLASSIC SERIES**



**DIMENSIONS:**

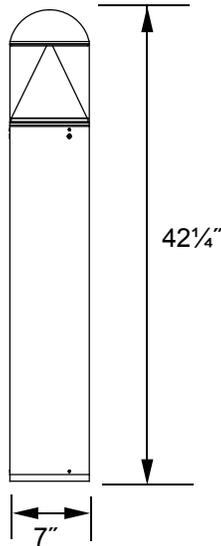

**PRODUCT DESCRIPTION:**

The round Classic LED Bollard is an economical and energy efficient choice for lighting walkways, plazas and other pedestrian areas in commercial and residential applications. Constructed of durable aluminum for maximum weatherability, the bollard features a specialized cone reflector that projects light down and outward for ample illumination that enhances pedestrian safety and security.

**FEATURES:**

- Up to 50,000 hour L70 lifetime, TM-21 standards @ 25°C
- Sealed fixture is dirt and bug free
- CRI: ≥85
- 5-year Limited Warranty

**CONSTRUCTION:**

- Aluminum Housing
- Powder coated to be rust and corrosion proof
- Internal Aluminum Cone Reflector
- Clear Polycarbonate lens

**INSTALLATION:**

- Flush Mounting Base with Vandal Resistant Screws
- Installation Kit with 8" Anchor Bolts Included

MODEL SELECTION				Typical order example: BL-CLRD17U-40B				
FAMILY	SUB FAMILY	SHAPE	WATTAGE	VOLTAGE	COLOR TEMPERATURE	FINISH	CONTROLS	
BL= Bollards	CL= Classic Series	RD= Round	17= 17W	U= 120-277V	40= 4000K *50= 5000K	B= Bronze *C= Custom	(OMIT)= None *EM= Battery Backup	

\*Made-to-order items. Please contact your MaxLite representative for lead times and order quantities.

**SPECIFICATIONS:**

		<b>BL-CLRD17</b>
<b>ITEM</b>	<b>SPECIFICATION</b>	<b>DETAILS</b>
<b>GENERAL PERFORMANCE</b>	Input Power (W)	17
	Lumens Delivered (lm)	1255
	Efficacy (lm/W)	70
	CRI	≥85
	Lumen Maintenance (L70, TM-21 @ 25°C)	>50,000 hours
	Color Temperature	4000K, 5000K
	Spacing Criteria	Available upon request
<b>ELECTRICAL</b>	Input Voltage	120-277V standard
<b>PHYSICAL</b>	Housing	Aluminum
	Mounting	Flush mounting base; anchor bolts for mounting included
<b>CERTIFICATION</b>	Certification	cCSAus, IP65
	Environment	Outdoor, wet location
	Warranty	5 years
	Operating Temperature	-40°F - 104°F (-40°C - 40°C)

Lighting layouts and spacing criteria available upon request.

**ORDERING:**

<b>ORDER CODE</b>	<b>MODEL</b>	<b>SHAPE</b>	<b>FINISH*</b>	<b>VOLTAGE</b>	<b>WATTAGE</b>	<b>CCT*</b>
107253	BL-CLRD17U-40B	Round	Bronze	120-277V	17W	4000K

\* Other options are available for order. Contact your MaxLite representative for quantities and lead times.

**MOUNTING BASE:**

