




# D-Series Size 1 LED Area Luminaire

d#series



## Specifications

<b>EPA:</b>	1.01 ft <sup>2</sup> (0.09 m <sup>2</sup> )
<b>Length:</b>	33" (83.8 cm)
<b>Width:</b>	13" (33.0 cm)
<b>Height:</b>	7-1/2" (19.0 cm)
<b>Weight (max):</b>	27 lbs (12.2 kg)

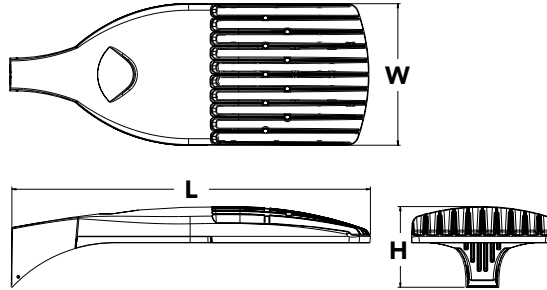

## Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and system-level interoperability.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is A+ Certified when ordered with DTL® controls marked by a shaded background. DTL DLL equipped luminaires meet the A+ specification for luminaire to photocontrol interoperability<sup>1</sup>
- This luminaire is part of an A+ Certified solution for ROAM® or XPoint™ Wireless control networks, providing out-of-the-box control compatibility with simple commissioning, when ordered with drivers and control options marked by a shaded background<sup>1</sup>

1. See ordering tree for details.
2. A+ Certified Solutions for ROAM require the order of one ROAM node per luminaire. Sold Separately

A+ Capable options indicated by this color background.

## Ordering Information

**EXAMPLE: DSX1 LED P7 40K T3M MVOLT SPA DDBXD**

Series	LEDs	Color temperature	Distribution	Voltage	Mounting
<b>DSX1 LED</b>	<b>Forward optics</b> P1 P4 P7 P2 P5 P8 P3 <b>P6</b> P9 <b>Rotated optics</b> P10 <sup>1</sup> P12 <sup>1</sup> P11 <sup>1</sup> P13 <sup>1</sup>	30K 3000 K <b>40K 4000 K</b> 50K 5000 K AMBPC Amber phosphor converted <sup>2</sup>	T1S Type I short T2S Type II short T2M Type II medium T3S Type III short T3M Type III medium <b>T4M Type IV medium</b> TFTM Forward throw medium TSVS Type V very short T5S Type V short T5M Type V medium T5W Type V wide BLC Backlight control <sup>2,3</sup> LCCO Left corner cutoff <sup>2,3</sup> RCCO Right corner cutoff <sup>2,3</sup>	<b>MVOLT<sup>4,5</sup></b> 120 <sup>6</sup> 208 <sup>5,6</sup> 240 <sup>5,6</sup> 277 <sup>6</sup> 347 <sup>5,6,7</sup> 480 <sup>5,6,7</sup>	<b>Shipped included</b> SPA Square pole mounting RPA Round pole mounting <b>WBA Wall bracket</b> SPUMBA Square pole universal mounting adaptor <sup>8</sup> RPUMBA Round pole universal mounting adaptor <sup>8</sup> <b>Shipped separately</b> KMA8 DDBXD U Mast arm mounting bracket adaptor (specify finish) <sup>9</sup>

Control options	Other options	Finish (required)
<b>Shipped installed</b> NLTAIR2 nLight AIR generation 2 enabled <sup>10</sup> PER NEMA twist-lock receptacle only (controls ordered separate) <sup>11</sup> PER5 Five-wire receptacle only (controls ordered separate) <sup>11,12</sup> PER7 Seven-wire receptacle only (controls ordered separate) <sup>11,12</sup> DMG 0-10V dimming extend out back of housing for external control (leads exit fixture) DS Dual switching <sup>13,14</sup> PIR Bi-level, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 5fc <sup>5,15,16</sup> PIRH Bi-level, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 5fc <sup>5,15,16</sup> PIRHN Network, Bi-Level motion/ambient sensor <sup>17</sup> PIR1FC3V Bi-level, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc <sup>5,15,16</sup>	PIRH1FC3V Bi-level, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc <sup>5,15,16</sup> BL30 Bi-level switched dimming, 30% <sup>5,14,18</sup> BL50 Bi-level switched dimming, 50% <sup>5,14,18</sup> PNMTDD3 Part night, dim till dawn <sup>5,19</sup> PNMT5D3 Part night, dim 5 hrs <sup>5,19</sup> PNMT6D3 Part night, dim 6 hrs <sup>5,19</sup> PNMT7D3 Part night, dim 7 hrs <sup>5,19</sup> FAO Field adjustable output <sup>20</sup>	<b>Shipped installed</b> HS House-side shield <sup>21</sup> SF Single fuse (120, 277, 347V) <sup>6</sup> DF Double fuse (208, 240, 480V) <sup>6</sup> L90 Left rotated optics <sup>1</sup> R90 Right rotated optics <sup>1</sup> <b>Shipped separately</b> BS Bird spikes <sup>22</sup> EGS External glare shield <sup>22</sup>
		DDBXD Dark bronze <b>DBLXD Black</b> DNAXD Natural aluminum DWHXD White DDBTXD Textured dark bronze DBLTXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white



# Ordering Information

## Accessories


Ordered and shipped separately.

DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) <sup>23</sup>
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) <sup>23</sup>
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) <sup>23</sup>
DSHORT SBK U	Shorting cap <sup>23</sup>
DSX1HS 30C U	House-side shield for 30 LED unit <sup>21</sup>
DSX1HS 40C U	House-side shield for 40 LED unit <sup>21</sup>
DSX1HS 60C U	House-side shield for 60 LED unit <sup>21</sup>
PUMBA DDBXD U*	Square and round pole universal mounting bracket (specify finish) <sup>24</sup>
KMA8 DDBXD U	Mast arm mounting bracket adaptor (specify finish) <sup>4</sup>

### NOTES


- P10, P11, P12 or P13 and rotated optics (L90, R90) only available together.
- AMBPC is not available with BLC, LCCO, RCCO or P4, P7, P8, P9 or P13.
- Not available with HS.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- Any PIRx with BL30, BL50 or PNMT, is not available with 208V, 240V, 347V, 480V or MVOLT. It is only available in 120V or 277V specified.
- Single fuse (SF) requires 120V, 277V or 347V. Double fuse (DF) requires 208V, 240V or 480V.
- Not available in P1 or P10. Not available with BL30, BL50 or PNMT options.
- Existing drilled pole only. Available as a separate combination accessory; for retrofit use only: PUMBA (finish) U; 1.5 G vibration load rating per ANCI C136.31.
- Must order fixture with SPA option. Must be ordered as a separate accessory; see Accessories information. For use with 2-3/8" mast arm (not included).
- Must be ordered with PIRHN.
- Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Not available with DS option. Shorting cap included.
- If ROAM<sup>®</sup> node required, it must be ordered and shipped as a separate line item from Acuity Brands Controls. Not available with DCR. Node with integral dimming. Shorting cap included.
- Provides 50/50 fixture operation via (2) independent drivers. Not available with PER, PER5, PER7, PIR or PIRH. Not available P1, P2, P3, P4 or P5.
- Requires (2) separately switched circuits.
- Reference Motion Sensor table on page 3.
- Reference PER table on page 3 to see functionality.
- Must be ordered with NLTAIR2.
- Not available with 347V, 480V, PNMT, DS. For PER5 or PER7, see PER Table on page 3. Requires isolated neutral.
- Not available with 347V, 480V, DS, BL30, BL50. For PER5 or PER7, see PER Table on page 3. Separate Dusk to Dawn required.
- Not available with other dimming controls options
- Not available with BLC, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- Must be ordered with fixture for factory pre-drilling.
- Requires luminaire to be specified with PER, PER5 or PER7 option. See PER Table on page 3.
- For retrofit use only.

## External Glare Shield

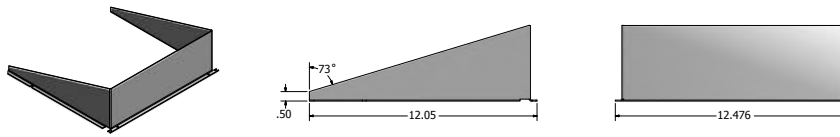

## Drilling

### HANDHOLE ORIENTATION



### Tenon Mounting Slipfitter\*\*


Tenon O.D.	Single Unit	2 at 180°	2 at 90°	3 at 120°	3 at 90°	4 at 90°
2-3/8"	AST20-190	AST20-280	AST20-290	AST20-320	AST20-390	AST20-490
2-7/8"	AST25-190	AST25-280	AST25-290	AST25-320	AST25-390	AST25-490
4"	AST35-190	AST35-280	AST35-290	AST35-320	AST35-390	AST35-490

Pole drilling nomenclature: # of heads at degree from handhole (default side A)					
DM19AS	DM28AS	DM29AS	DM32AS	DM39AS	DM49AS
1 @ 90°	2 @ 280°	2 @ 90°	3 @ 120°	3 @ 90°	4 @ 90°
Side B	Side B & D	Side B & C	Round pole only	Side B, C, & D	Sides A, B, C, D

Note: Review luminaire spec sheet for specific nomenclature


Pole top or tenon O.D.	4.5" @ 90°	4" @ 90°	3.5" @ 90°	3" @ 90°	4.5" @ 120°	4" @ 120°	3.5" @ 120°	3" @ 120°
DSX SPA	Y	Y	Y	N	-	-	-	-
DSX RPA	Y	Y	N	N	Y	Y	Y	Y
DSX SPUMBA	Y	N	N	N	-	-	-	-
DSX RPUMBA	N	N	N	N	Y	Y	Y	N

\*3 fixtures @120 require round pole top/tenon.

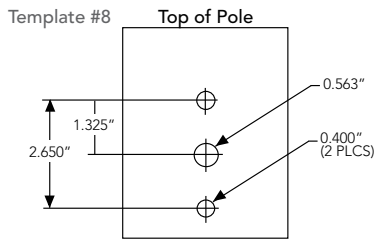

## Photometric Diagrams

Isfootcandle plots for the DSX1 LED 60C 1000 40K. Distances are in units of mounting height (25').

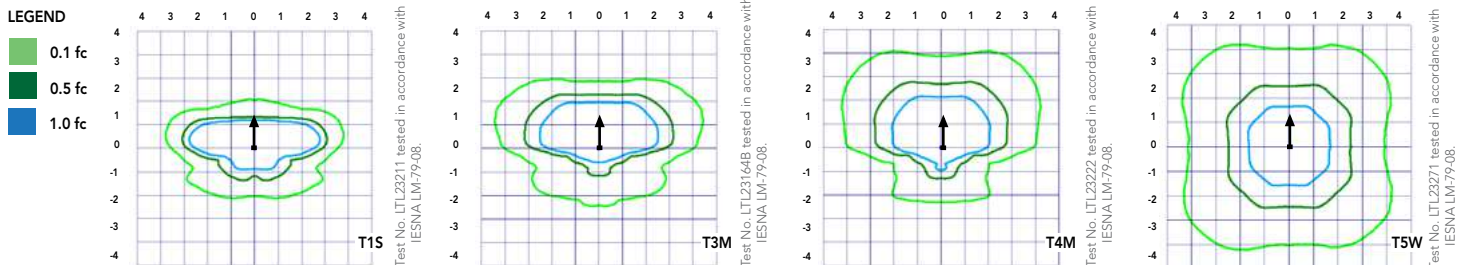

## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
<b>25°C</b>	<b>77°F</b>	<b>1.00</b>
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25000	50000	100000
Lumen Maintenance Factor	1.00	0.96	0.92	0.85

### Electrical Load

	Performance Package	LED Count	Drive Current	Wattage	Current (A)					
					120	208	240	277	347	480
Forward Optics (Non-Rotated)	P1	30	530	54	0.45	0.26	0.23	0.19	0.10	0.12
	P2	30	700	70	0.59	0.34	0.30	0.25	0.20	0.16
	P3	30	1050	102	0.86	0.50	0.44	0.38	0.30	0.22
	P4	30	1250	125	1.06	0.60	0.52	0.46	0.37	0.27
	P5	30	1400	138	1.16	0.67	0.58	0.51	0.40	0.29
	<b>P6</b>	<b>40</b>	<b>1250</b>	<b>163</b>	<b>1.36</b>	<b>0.78</b>	<b>0.68</b>	<b>0.59</b>	<b>0.47</b>	<b>0.34</b>
	P7	40	1400	183	1.53	0.88	0.76	0.66	0.53	0.38
	P8	60	1050	207	1.74	0.98	0.87	0.76	0.64	0.49
	P9	60	1250	241	2.01	1.16	1.01	0.89	0.70	0.51
Rotated Optics (Requires L90 or R90)	P10	60	530	106	0.90	0.52	0.47	0.43	0.33	0.27
	P11	60	700	137	1.15	0.67	0.60	0.53	0.42	0.32
	P12	60	1050	207	1.74	0.99	0.87	0.76	0.60	0.46
	P13	60	1250	231	1.93	1.12	0.97	0.86	0.67	0.49

### Motion Sensor Default Settings

Option	Dimmed State	High Level (when triggered)	Photocell Operation	Dwell Time	Ramp-up Time	Ramp-down Time
PIR or PIRH	3V (37%) Output	10V (100%) Output	Enabled @ 5FC	5 min	3 sec	5 min
*PIR1FC3V or PIRH1FC3V	3V (37%) Output	10V (100%) Output	Enabled @ 1FC	5 min	3 sec	5 min

\*for use with Inline Dusk to Dawn or timer.

### PER Table

Control	PER (3 wire)	PER5 (5 wire)		PER7 (7 wire)		
		Wire 4/Wire5	Wire 4/Wire5	Wire 4/Wire5	Wire 6/Wire7	
Photocontrol Only (On/Off)	✓	▲	Wired to dimming leads on driver	▲	Wired to dimming leads on driver	Wires Capped inside fixture
ROAM	✗	✓	Wired to dimming leads on driver	▲	Wired to dimming leads on driver	Wires Capped inside fixture
ROAM with Motion (ROAM on/off only)	✗	▲	Wires Capped inside fixture	▲	Wires Capped inside fixture	Wires Capped inside fixture
Future-proof*	✗	▲	Wired to dimming leads on driver	✓	Wired to dimming leads on driver	Wires Capped inside fixture
Future-proof* with Motion	✗	▲	Wires Capped inside fixture	✓	Wires Capped inside fixture	Wires Capped inside fixture

✓ Recommended
✗ Will not work
▲ Alternate

\*Future-proof means: Ability to change controls in the future.



# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics																												
LED Count	Drive Current	Power Package	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lu-mens	B	U	G	LPW				
40	1250	P6	163W	T1S	17,654	3	0	3	108	19,018	3	0	3	117	19,259	3	0	3	118									
				T2S	17,635	3	0	3	108	18,998	3	0	3	117	19,238	3	0	3	118									
				T2M	17,726	3	0	3	109	19,096	3	0	3	117	19,337	3	0	3	119									
				T3S	17,167	3	0	3	105	18,493	3	0	3	113	18,727	3	0	3	115									
				T3M	17,683	3	0	3	108	19,049	3	0	3	117	19,290	3	0	3	118									
				T4M	17,299	3	0	3	106	18,635	3	0	4	114	18,871	3	0	4	116									
				TFTM	17,672	3	0	3	108	19,038	3	0	4	117	19,279	3	0	4	118									
				T5VS	18,379	4	0	1	113	19,800	4	0	1	121	20,050	4	0	1	123									
				T5S	18,394	4	0	2	113	19,816	4	0	2	122	20,066	4	0	2	123									
				T5M	18,348	4	0	2	113	19,766	4	0	2	121	20,016	4	0	2	123									
				T5W	18,228	5	0	3	112	19,636	5	0	3	120	19,885	5	0	3	122									
				BLC	14,489	2	0	2	89	15,609	2	0	3	96	15,806	2	0	3	97									
				LCCO	10,781	1	0	3	66	11,614	1	0	3	71	11,761	2	0	3	72									
				RCCO	10,781	1	0	3	66	11,614	1	0	3	71	11,761	2	0	3	72									
				40	1400	P7	183W	T1S	19,227	3	0	3	105	20,712	3	0	3	113	20,975	3	0	3	115					
								T2S	19,206	3	0	3	105	20,690	3	0	3	113	20,952	3	0	3	114					
T2M	19,305	3	0					3	105	20,797	3	0	3	114	21,060	3	0	3	115									
T3S	18,696	3	0					3	102	20,141	3	0	3	110	20,396	3	0	4	111									
T3M	19,258	3	0					3	105	20,746	3	0	3	113	21,009	3	0	3	115									
T4M	18,840	3	0					4	103	20,296	3	0	4	111	20,553	3	0	4	112									
TFTM	19,246	3	0					4	105	20,734	3	0	4	113	20,996	3	0	4	115									
T5VS	20,017	4	0					1	109	21,564	4	0	1	118	21,837	4	0	1	119									
T5S	20,033	4	0					2	109	21,581	4	0	2	118	21,854	4	0	2	119									
T5M	19,983	4	0					2	109	21,527	5	0	3	118	21,799	5	0	3	119									
T5W	19,852	5	0					3	108	21,386	5	0	3	117	21,656	5	0	3	118									
BLC	15,780	2	0					3	86	16,999	2	0	3	93	17,214	2	0	3	94									
LCCO	11,742	2	0					3	64	12,649	2	0	3	69	12,809	2	0	3	70									
RCCO	11,742	2	0					3	64	12,649	2	0	3	69	12,809	2	0	3	70									
60	1050	P8	207W					T1S	22,490	3	0	3	109	24,228	3	0	3	117	24,535	3	0	3	119					
								T2S	22,466	3	0	4	109	24,202	3	0	4	117	24,509	3	0	4	118					
				T2M	22,582	3	0	3	109	24,327	3	0	3	118	24,635	3	0	3	119									
				T3S	21,870	3	0	4	106	23,560	3	0	4	114	23,858	3	0	4	115									
				T3M	22,527	3	0	4	109	24,268	3	0	4	117	24,575	3	0	4	119									
				T4M	22,038	3	0	4	106	23,741	3	0	4	115	24,041	3	0	4	116									
				TFTM	22,513	3	0	4	109	24,253	3	0	4	117	24,560	3	0	4	119									
				T5VS	23,415	5	0	1	113	25,224	5	0	1	122	25,543	5	0	1	123									
				T5S	23,434	4	0	2	113	25,244	4	0	2	122	25,564	4	0	2	123									
				T5M	23,374	5	0	3	113	25,181	5	0	3	122	25,499	5	0	3	123									
				T5W	23,221	5	0	4	112	25,016	5	0	4	121	25,332	5	0	4	122									
				BLC	18,458	2	0	3	89	19,885	2	0	3	96	20,136	2	0	3	97									
				LCCO	13,735	2	0	3	66	14,796	2	0	4	71	14,983	2	0	4	72									
				RCCO	13,735	2	0	3	66	14,796	2	0	4	71	14,983	2	0	4	72									
				60	1250	P9	241W	T1S	25,575	3	0	3	106	27,551	3	0	3	114	27,900	3	0	3	116					
								T2S	25,548	3	0	4	106	27,522	3	0	4	114	27,871	3	0	4	116					
T2M	25,680	3	0					3	107	27,664	3	0	3	115	28,014	3	0	3	116									
T3S	24,870	3	0					4	103	26,791	3	0	4	111	27,130	3	0	4	113									
T3M	25,617	3	0					4	106	27,597	3	0	4	115	27,946	3	0	4	116									
T4M	25,061	3	0					4	104	26,997	3	0	4	112	27,339	3	0	4	113									
TFTM	25,602	3	0					4	106	27,580	3	0	4	114	27,929	3	0	4	116									
T5VS	26,626	5	0					1	110	28,684	5	0	1	119	29,047	5	0	1	121									
T5S	26,648	4	0					2	111	28,707	5	0	2	119	29,070	5	0	2	121									
T5M	26,581	5	0					3	110	28,635	5	0	3	119	28,997	5	0	3	120									
T5W	26,406	5	0					4	110	28,447	5	0	4	118	28,807	5	0	4	120									
BLC	20,990	2	0					3	87	22,612	2	0	3	94	22,898	2	0	3	95									
LCCO	15,619	2	0					4	65	16,825	2	0	4	70	17,038	2	0	4	71									
									15,619	2	0	4	65	16,825	2	0	4	70	17,038	2	0	4	71					

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Rotated Optics																										
LED Count	Drive Current	Power Package	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)						
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW		
					60	530	P10	106W	T1S	13,042	3	0	3	123	14,050	3	0	3	133	14,228	3	0	3	134	7,167	2
T2S	12,967	4	0	4					122	13,969	4	0	4	132	14,146	4	0	4	133	7,507	2	0	2	76		
T2M	13,201	3	0	3					125	14,221	3	0	3	134	14,401	3	0	3	136	7,263	2	0	2	73		
T3S	12,766	4	0	4					120	13,752	4	0	4	130	13,926	4	0	4	131	7,424	2	0	2	75		
T3M	13,193	4	0	4					124	14,213	4	0	4	134	14,393	4	0	4	136	7,387	2	0	2	75		
T4M	12,944	4	0	4					122	13,945	4	0	4	132	14,121	4	0	4	133	7,400	2	0	2	75		
TFTM	13,279	4	0	4					125	14,305	4	0	4	135	14,486	4	0	4	137	7,288	1	0	2	74		
TSVS	13,372	3	0	1					126	14,405	4	0	1	136	14,588	4	0	1	138	7,734	3	0	1	78		
TSS	13,260	3	0	1					125	14,284	3	0	1	135	14,465	3	0	1	136	7,641	3	0	0	77		
TSM	13,256	4	0	2					125	14,281	4	0	2	135	14,462	4	0	2	136	7,737	3	0	2	78		
TSW	13,137	4	0	3					124	14,153	4	0	3	134	14,332	4	0	3	135	7,522	3	0	2	76		
BLC	10,906	3	0	3					103	11,749	3	0	3	111	11,898	3	0	3	112							
LCCO	7,789	1	0	3					73	8,391	1	0	3	79	8,497	1	0	3	80							
RCCO	7,779	4	0	4					73	8,380	4	0	4	79	8,486	4	0	4	80							
60	700	P11	137W	T1S					16,556	3	0	3	121	17,835	3	0	3	130	18,061	4	0	4	132	8,952	2	0
				T2S	16,461	4	0	4	120	17,733	4	0	4	129	17,957	4	0	4	131	9,377	2	0	2	72		
				T2M	16,758	4	0	4	122	18,053	4	0	4	132	18,281	4	0	4	133	9,072	2	0	2	69		
				T3S	16,205	4	0	4	118	17,457	4	0	4	127	17,678	4	0	4	129	9,273	2	0	2	71		
				T3M	16,748	4	0	4	122	18,042	4	0	4	132	18,271	4	0	4	133	9,227	2	0	2	70		
				T4M	16,432	4	0	4	120	17,702	4	0	4	129	17,926	4	0	4	131	9,243	2	0	2	71		
				TFTM	16,857	4	0	4	123	18,159	4	0	4	133	18,389	4	0	4	134	9,103	2	0	2	69		
				TSVS	16,975	4	0	1	124	18,287	4	0	1	133	18,518	4	0	1	135	9,661	3	0	1	74		
				TSS	16,832	4	0	1	123	18,133	4	0	1	132	18,362	4	0	1	134	9,544	3	0	1	73		
				TSM	16,828	4	0	2	123	18,128	4	0	2	132	18,358	4	0	2	134	9,665	3	0	2	74		
				TSW	16,677	4	0	3	122	17,966	5	0	3	131	18,193	5	0	3	133	9,395	4	0	2	72		
				BLC	13,845	3	0	3	101	14,915	3	0	3	109	15,103	3	0	3	110							
				LCCO	9,888	1	0	3	72	10,652	2	0	3	78	10,787	2	0	3	79							
				RCCO	9,875	4	0	4	72	10,638	4	0	4	78	10,773	4	0	4	79							
				60	1050	P12	207W	T1S	22,996	4	0	4	111	24,773	4	0	4	120	25,087	4	0	4	121			
T2S	22,864	4	0					4	110	24,631	5	0	5	119	24,943	5	0	5	120							
T2M	23,277	4	0					4	112	25,075	4	0	4	121	25,393	4	0	4	123							
T3S	22,509	4	0					4	109	24,248	5	0	5	117	24,555	5	0	5	119							
T3M	23,263	4	0					4	112	25,061	4	0	4	121	25,378	4	0	4	123							
T4M	22,824	5	0					5	110	24,588	5	0	5	119	24,899	5	0	5	120							
TFTM	23,414	5	0					5	113	25,223	5	0	5	122	25,543	5	0	5	123							
TSVS	23,579	5	0					1	114	25,401	5	0	1	123	25,722	5	0	1	124							
TSS	23,380	4	0					2	113	25,187	4	0	2	122	25,506	4	0	2	123							
TSM	23,374	5	0					3	113	25,181	5	0	3	122	25,499	5	0	3	123							
TSW	23,165	5	0					4	112	24,955	5	0	4	121	25,271	5	0	4	122							
BLC	19,231	4	0					4	93	20,717	4	0	4	100	20,979	4	0	4	101							
LCCO	13,734	2	0					3	66	14,796	2	0	4	71	14,983	2	0	4	72							
RCCO	13,716	4	0					4	66	14,776	4	0	4	71	14,963	4	0	4	72							
60	1250	P13	231W					T1S	25,400	4	0	4	110	27,363	4	0	4	118	27,709	4	0	4	120			
				T2S	25,254	5	0	5	109	27,205	5	0	5	118	27,550	5	0	5	119							
				T2M	25,710	4	0	4	111	27,696	4	0	4	120	28,047	4	0	4	121							
				T3S	24,862	5	0	5	108	26,783	5	0	5	116	27,122	5	0	5	117							
				T3M	25,695	5	0	5	111	27,680	5	0	5	120	28,031	5	0	5	121							
				T4M	25,210	5	0	5	109	27,158	5	0	5	118	27,502	5	0	5	119							
				TFTM	25,861	5	0	5	112	27,860	5	0	5	121	28,212	5	0	5	122							
				TSVS	26,043	5	0	1	113	28,056	5	0	1	121	28,411	5	0	1	123							
				TSS	25,824	4	0	2	112	27,819	5	0	2	120	28,172	5	0	2	122							
				TSM	25,818	5	0	3	112	27,813	5	0	3	120	28,165	5	0	3	122							
				TSW	25,586	5	0	4	111	27,563	5	0	4	119	27,912	5	0	4	121							
				BLC	21,241	4	0	4	92	22,882	4	0	4	99	23,172	4	0	4	100							
				LCCO	15,170	2	0	4	66	16,342	2	0	4	71	16,549	2	0	4	72							
									15,150	5	0	5	66	16,321	5	0	5	71	16,527	5	0	5	72			

---

## FEATURES & SPECIFICATIONS

### INTENDED USE

The sleek design of the D-Series Size 1 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and streetscapes.

### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED drivers are mounted in direct contact with the casting to promote low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65). Low EPA (1.01 ft<sup>2</sup>) for optimized pole wind loading.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

### OPTICS

Precision-molded proprietary acrylic lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in standard 3000 K, 4000 K and 5000 K (70 CRI) configurations. The D-Series Size 1 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L85/100,000 hours at 25°C). Class 1

electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

### INSTALLATION

Included mounting block and integral arm facilitate quick and easy installation. Stainless steel bolts fasten the mounting block securely to poles and walls, enabling the D-Series Size 1 to withstand up to a 3.0 G vibration load rating per ANSI C136.31. The D-Series Size 1 utilizes the AERIS™ series pole drilling pattern (template #8). Optional terminal block and NEMA photocontrol receptacle are also available.

### LISTINGS

UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP65 rated. Rated for -40°C minimum ambient. U.S. Patent No. D672,492 S. International patent pending.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

### WARRANTY

5-year limited warranty.

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.