



High quality of light and color rendering (90+ CRI, 50+ R9),
with low flicker, flicker <30%,
Smooth dimming. Dimming lower than 10%.





ELECTRICAL SPECIFICATIONS

| MODEL NO. | LUMEN | POWER | CCT | BEAM | CRI | PF | CBCP |
|-------------------|--------------|------------|--------------|-------------|---------------|----------------|--------------|
| SE-350.059 | 850LM | 11W | 2700K | 100° | >90 | >0.9 | 405cd |
| SE-350.060 | 850LM | 11W | 3000K | 100° | >90 | >0.9 | 420cd |
| SE-350.061 | 850LM | 11W | 4000K | 100° | >90 | >0.9 | 420cd |
| SE-350.062 | 850LM | 11W | 5000K | 100° | >90 | >0.9 | 420cd |

MECHANICAL SPECIFICATIONS

| MODEL NO. | MEASURES | WEIGHT | OPERATIONAL TEMPERATURE | INNER BOX QTY | MASTER CARTON QTY |
|-------------------|------------------------|---------------|-------------------------|---------------|-------------------|
| SE-350.059 | 7.36in X 2.28in | 8.11oz | -20°C - 40°C | 6pcs | 24pcs |
| SE-350.060 | 7.36in X 2.28in | 8.11oz | -20°C - 40°C | 6pcs | 24pcs |
| SE-350.061 | 7.36in X 2.28in | 8.11oz | -20°C - 40°C | 6pcs | 24pcs |
| SE-350.062 | 7.36in X 2.28in | 8.11oz | -20°C - 40°C | 6pcs | 24pcs |

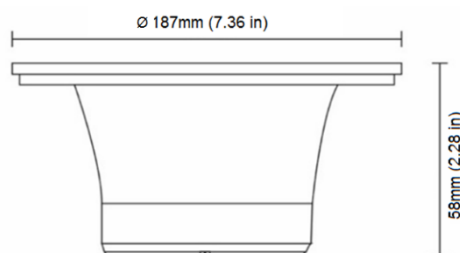

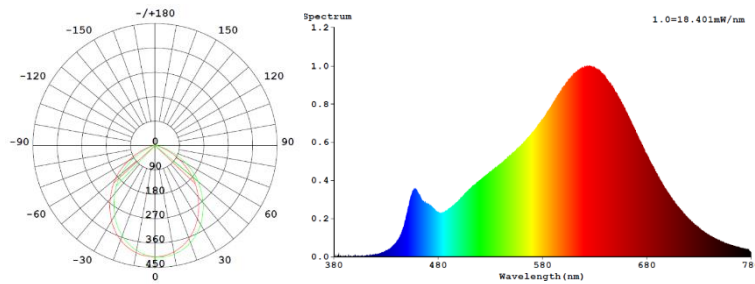


RA – CHART: >90

RA refers to the average value of R1 to R8.

R9 is the score that represents how accurately a light source will reproduce strong red colors. "Accurate" is defined as similarity to daylight or incandescent bulbs, depending on the color temperature.

R VALUES

| | | | | | | |
|-------|-------|--------|--------|--------|--------|--------|
| R1=94 | R2=99 | R3=97 | R4=92 | R5=94 | R6=97 | R7=90 |
| R8=81 | R9=61 | R10=97 | R11=94 | R12=85 | R13=96 | R14=99 |

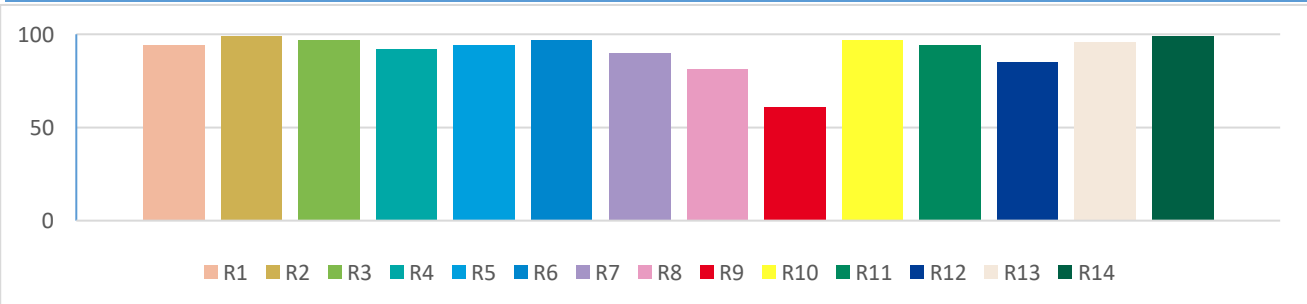

TM30 GRAPHIC

TM-30 deals with the color rendition of object.

Rf- a fidelity index that is similar to the commonly used CRI

Rg- a gamut index that provides information about saturation

Color vector graphic- a graphical representation of hue and saturation relative to a reference source.

