

# FOR INSTALLATION USING SUPPORT STAND

1. For installation in downward facing horizontal fixture, use support with double 'prongs'. Cut to desired length after installation. See chart A

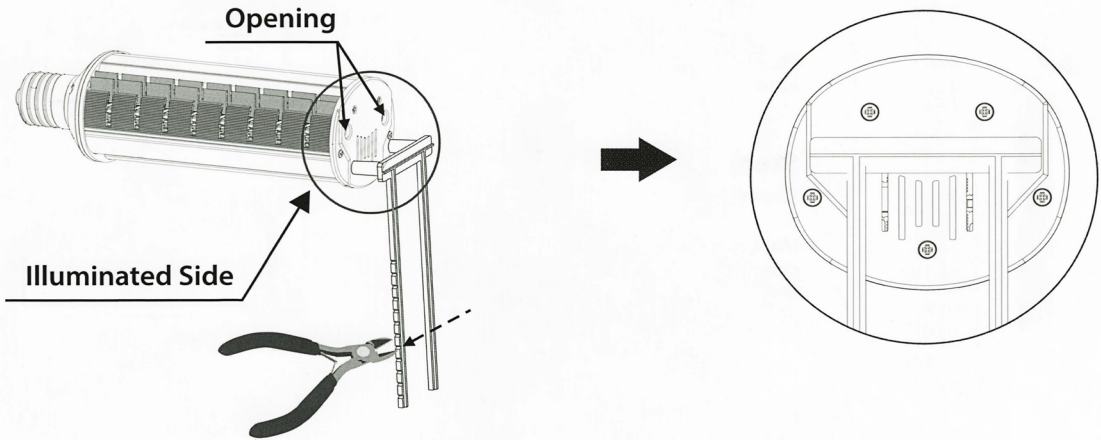


Fig.A

2. For installation in outward facing horizontal fixture, use support with single prongs. Cut to desired length after installation. See chart B

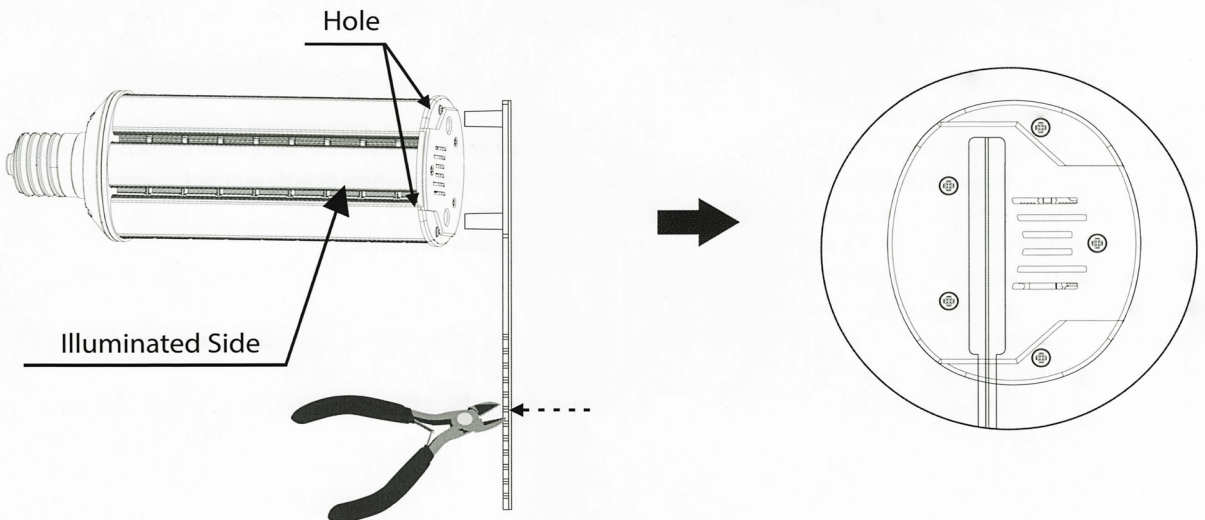


Fig.B