




LED T8 SERIES


DIrect LED T8 - 4FT

COMMERCIAL SPEC GRADE

Replaces 32W 4ft Fluorescent T8

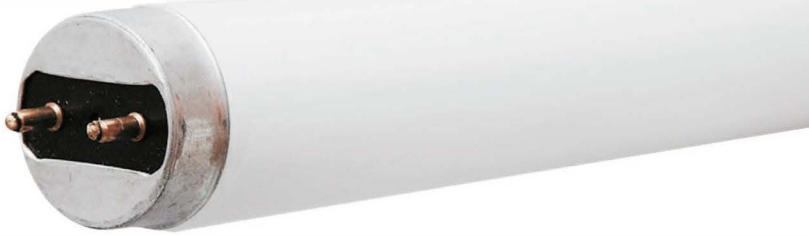

Superior All-Around Light Distribution



Coated Shatter-Resistant Glass



Designed for high efficiency and versatility, the IC-Driver allows for exceptional DIrect performance



Seamless output from end-to-end, Light Engine allows for fully uniform light output

FEATURES

- DIrect Replacement w/ Aluminum End-Cap
- Full Glass Lens with 310° Light Distribution
- Universal Input Voltage - 120-277V, 347V
- Uniform Light Output From End-to-End
- UL + NSF/ANSI Standard 2 + DLC 4.0 QPL Listed
- Instant-ON with No Flicker
- 5-Year Warranty


Specifications and Technical Data

MODEL	BASE TYPE	WATTS / EQV.	LUMEN	CCT	LENGTH	VOLTAGE	CRI	THD	CARTON QTY	LIGHT DISTRIBUTION
LBT8F1930C	Bi-Pin G13	13W / 32W	1800LM	3000K	4 FT	120-277, 347V	83	<20%	16	310°
LBT8F1935C	Bi-Pin G13	13W / 32W	1800LM	3500K	4 FT	120-277, 347V	83	<20%	16	310°
LBT8F1941C	Bi-Pin G13	13W / 32W	1900LM	4100K	4 FT	120-277, 347V	83	<20%	16	310°
LBT8F1945C	Bi-Pin G13	13W / 32W	1900LM	4500K	4 FT	120-277, 347V	83	<20%	16	310°
LBT8F1950C	Bi-Pin G13	13W / 32W	2000LM	5000K	4 FT	120-277, 347V	83	<20%	16	310°
LBT8F2130C	Bi-Pin G13	15.0W / 32W	2000LM	3000K	4 FT	120-277, 347V	83	<20%	16	310°
LBT8F2135C	Bi-Pin G13	15.0W / 32W	2000LM	3500K	4 FT	120-277, 347V	83	<20%	16	310°
LBT8F2141C	Bi-Pin G13	15.0W / 32W	2100LM	4100K	4 FT	120-277, 347V	83	<20%	16	310°
LBT8F2145C	Bi-Pin G13	15.0W / 32W	2100LM	4500K	4 FT	120-277, 347V	83	<20%	16	310°
LBT8F2150C	Bi-Pin G13	15.0W / 32W	2200LM	5000K	4 FT	120-277, 347V	83	<20%	16	310°

* Suitable for use in totally enclosed fixtures

** Suitable for damp locations. Not for use where exposed to the weather or moisture

Installation Configuration

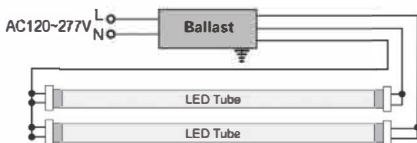

DIrect

Light Distribution Curve

