



# LED T8 SERIES


## DIRect LED T8 - 4FT

### COMMERCIAL SPEC GRADE

Replaces 32W 4ft Fluorescent T8



#### Superior All-Around Light Distribution



#### Coated Shatter-Resistant Glass



Designed for high efficiency and versatility, the IC-Driver allows for exceptional DIRect performance



Seamless output from end-to-end, ARCHIPELAGO® Light Engine allows for fully uniform light output



### FEATURES

- DIRect Replacement w/ Aluminum End-Cap
- Full Glass Lens with 310° Light Distribution
- Universal Input Voltage - 120-277V, 347V
- Uniform Light Output From End-to-End
- UL + NSF/ANSI Standard 2 + DLC4.0 QPL Listed
- Instant-ON with No Flicker
- 5-Year Warranty


### Specifications and Technical Data

MODEL	BASE TYPE	WATTS / EQV.	LUMEN	CCT	LENGTH	VOLTAGE	CRI	THD	CARTON QTY	LIGHT DISTRIBUTION
LBT8F1930C	Bi-Pin G13	13W / 32W	1800LM	3000K	4 FT	120-277, 347V	83	<20%	16	310°
LBT8F1935C	Bi-Pin G13	13W / 32W	1800LM	3500K	4 FT	120-277, 347V	83	<20%	16	310°
LBT8F1941C	Bi-Pin G13	13W / 32W	1900LM	4100K	4 FT	120-277, 347V	83	<20%	16	310°
LBT8F1945C	Bi-Pin G13	13W / 32W	1900LM	4500K	4 FT	120-277, 347V	83	<20%	16	310°
LBT8F1950C	Bi-Pin G13	13W / 32W	2000LM	5000K	4 FT	120-277, 347V	83	<20%	16	310°
LBT8F2130C	Bi-Pin G13	15.0W / 32W	2000LM	3000K	4 FT	120-277, 347V	83	<20%	16	310°
LBT8F2135C	Bi-Pin G13	15.0W / 32W	2000LM	3500K	4 FT	120-277, 347V	83	<20%	16	310°
LBT8F2141C	Bi-Pin G13	15.0W / 32W	2100LM	4100K	4 FT	120-277, 347V	83	<20%	16	310°
LBT8F2145C	Bi-Pin G13	15.0W / 32W	2100LM	4500K	4 FT	120-277, 347V	83	<20%	16	310°
LBT8F2150C	Bi-Pin G13	15.0W / 32W	2200LM	5000K	4 FT	120-277, 347V	83	<20%	16	310°

\* Suitable for use in totally enclosed fixtures

\*\* Suitable for damp locations. Not for use where exposed to the weather or moisture

### Installation Configuration

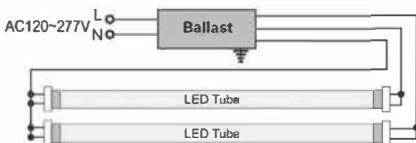

DIRect

### Light Distribution Curve

