



LED T8 SERIES


DIReCT LED T8 - 2FT

COMMERCIAL SPEC GRADE

Replaces 17W 2ft Fluorescent T8



Superior All-Around Light Distribution



Coated Shatter-Resistant Glass



Designed for high efficiency and versatility, the IC-Driver allows for exceptional DIReCT performance



Seamless output from end-to-end, ARCHIPELAGO® Light Engine allows for fully uniform light output



FEATURES

- DIReCT Replacement w/ Aluminum End-Cap
- Full Glass Lens with 310° Light Distribution
- Universal Input Voltage - 120-277V, 347V
- Uniform Light Output From End-to-End
- Instant-ON with No Flicker
- 5-Year Warranty
- UL + DLC + NSF/ANSI Standard 2


Specifications and Technical Data (T8 | DIReCT | 2ft)

MODEL	BASE TYPE	WATTS / EQV.	LUMEN	CCT	LENGTH	VOLTAGE	CRI	THD	CARTON QTY	LIGHT DISTRIBUTION
LBT8F1441C	Bi-Pin G13	9W / 17W	1400LM	4100K	2 FT	120-277V	83	<20%	16	310°
LBT8F1445C	Bi-Pin G13	9W / 17W	1400LM	4500K	2 FT	120-277V	83	<20%	16	310°
LBT8F1450C	Bi-Pin G13	9W / 17W	1400LM	5000K	2 FT	120-277V	83	<20%	16	310°

* Suitable for use in totally enclosed fixtures

** Suitable for damp locations. Not for use where exposed to the weather or moisture

Installation Configuration

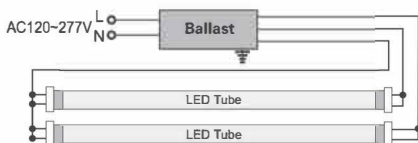

DIReCT

Light Distribution Curve

