



# LED T5 SERIES


## DIRect LED T5 - 4FT

### COMMERCIAL SPEC GRADE

Replaces 54W 4ft Fluorescent T5



#### Superior All-Around Light Distribution



#### Coated Shatter-Resistant Glass



Designed for high efficiency and versatility, the IC-Driver allows for exceptional DIRect performance



Seamless output from end-to-end, Light Engine allows for fully uniform light output



### FEATURES

- DIRect Replacement 54W T5 for High Lumen Output
- Full Glass Lens with 310° Light Distribution
- Universal Input Voltage - 120-277V, 347V
- Uniform Light Output From End-to-End
- UL + NSF/ANSI Standard 2 + DLC4.0 QPL Listed
- Instant-ON with No Flicker
- 5-Year Warranty


### Specifications and Technical Data

MODEL	BASE TYPE	WATTS / EQV.	LUMEN	CCT	LENGTH	VOLTAGE	CRI	THD	CARTON QTY	LIGHT DISTRIBUTION
LBT5F3035B	Bi-Pin G5	22.5W / 54W	3000LM	3500K	4 FT	120-277V, 347V	83	<20%	16	310°
LBT5F3041B	Bi-Pin G5	22.5W / 54W	3000LM	4100K	4 FT	120-277V, 347V	83	<20%	16	310°
LBT5F3045B	Bi-Pin G5	22.5W / 54W	3000LM	4500K	4 FT	120-277V, 347V	83	<20%	16	310°
LBT5F3050B	Bi-Pin G5	22.5W / 54W	3000LM	5000K	4 FT	120-277V, 347V	83	<20%	16	310°
LBT5F3335B	Bi-Pin G5	25.5W / 54W	3300LM	3500K	4 FT	120-277V, 347V	83	<20%	16	310°
LBT5F3341B	Bi-Pin G5	25.5W / 54W	3300LM	4100K	4 FT	120-277V, 347V	83	<20%	16	310°
LBT5F3345B	Bi-Pin G5	25.5W / 54W	3300LM	4500K	4 FT	120-277V, 347V	83	<20%	16	310°
LBT5F3350B	Bi-Pin G5	25.5W / 54W	3300LM	5000K	4 FT	120-277V, 347V	83	<20%	16	310°

\* Suitable for use in totally enclosed fixtures

\*\* Suitable for damp locations. Not for use where exposed to the weather or moisture

### Installation Configuration

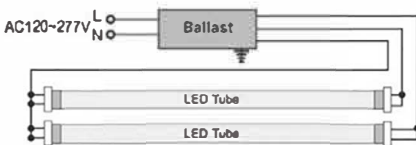

DIRect

### Light Distribution Curve

