

# ELITE SERIES LED Dimmable Snap-In Downlights

Ultra-thin meets ultra easy with Snap-In Downlights from PLT. You no longer need a recessed can or a junction box, snap-in downlights can be directly mounted to drywall, drop ceilings and other locations. Simply shape a hole and place the downlight inside.

## Limitless options for the following applications:

- Commercial
- Industrial
- Retail
- Hospitality
- Residential
- Healthcare

## Great features and benefits:

- Frosted glass lens
- Snap-in mounting springs, for use without junction box or recessed can
- Sturdy, steel encased, separated LED driver with watertight seal
- 75-120 watt incandescent equivalent
- Wide beam spread
- Triac dimming
- Damp location rated
- IC rated
- Life: 40,000 hours
- Square or round form factor
- Easy wiring access for quick install
- 120-volt



# ELITE Series LED Dimmable Snap-In Downlights

**LED** 40,000 hours average rated life, 120 volts


## Applications

Perfect for 4, 6 & 8 inch dimmable downlight applications




## Features and Benefits

- Ideal for replacing dimmable 75W, 85W and 120W incandescent alternatives
- Smooth, uniform dimming
- Highly efficient LEDs and Driver
- Long Life: 40,000 hours
- Snap-in mounting springs, for use without junction box or recessed can
- Square or round options available
- UL approved for damp locations
- Easy wiring access for quick install
- Shatter Resistant

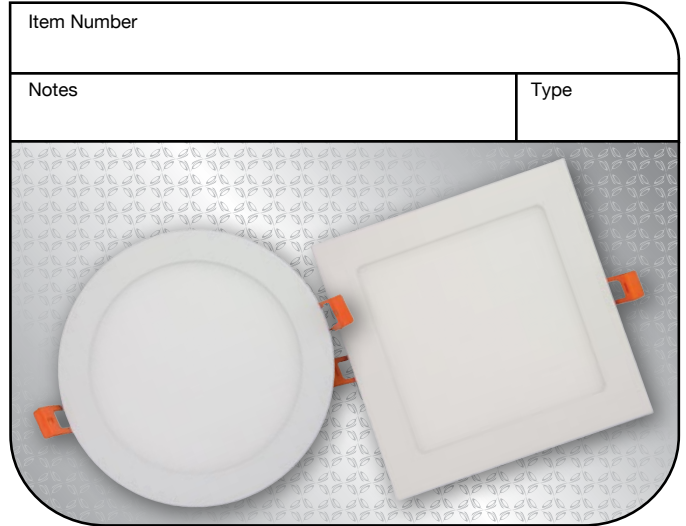

## Specifications

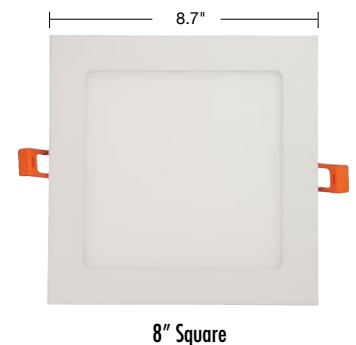

|                        | Round Snap-In | Square Snap-In |
|------------------------|---------------|----------------|
| Input Line Voltage:    | 120 VAC       | 120 VAC        |
| Input Power            | 13,14 & 18 W  | 13,14 & 18 W   |
| Input Line Frequency   | 50/60HZ       | 50/60HZ        |
| Lamp Life (Rated)      | 40,000 hrs    | 40,000 hrs     |
| Minimum Starting Temp  | -20°C         | -20°C          |
| Maximum Operating Temp | 40°C          | 40°C           |



**5 YEAR WARRANTY\***  
\*Based on 12 hours usage per day



# ELITE Series LED Dimmable Snap-In Downlights

| Warranties and Certifications:   | Item #                           | Energy Star® RATED                 | Description                        | Rated Life (hours) | Replacement Wattage | Voltage | Wattage | Lumens | LPW   | CCT   | CRI  | Beam Angle | MOL (inches) | Diameter (inches) |  |
|--|----------------------------------|------------------------------------|------------------------------------|--------------------|---------------------|---------|---------|--------|-------|-------|------|------------|--------------|-------------------|--|
| <br><br><b>5 YEAR WARRANTY*</b><br><small>*Based on 12 hours usage per day</small> | <b>ROUND SNAP-IN DOWNLIGHTS</b>  |                                    |                                    |                    |                     |         |         |        |       |       |      |            |              |                   |  |
|  | DDR40127                         | ★                                  | 4" 850LM round downlight - 2700K   | 40,000             | 75                  | 120     | 13      | 850    | 65.4  | 2700K | 80   | 110°       | 0.8          | 4.6               |  |
|  | DDR40130                         | ★                                  | 4" 850LM round downlight - 3000K   | 40,000             | 75                  | 120     | 13      | 850    | 65.4  | 3000K | 80   | 110°       | 0.8          | 4.6               |  |
|  | DDR40140                         | ★                                  | 4" 850LM round downlight - 4000K   | 40,000             | 75                  | 120     | 13      | 850    | 65.4  | 4000K | 80   | 110°       | 0.8          | 4.6               |  |
|  | DDR40150                         | ★                                  | 4" 850LM round downlight - 5000K   | 40,000             | 75                  | 120     | 13      | 850    | 65.4  | 5000K | 80   | 110°       | 0.8          | 4.6               |  |
|  | DDR60127                         | ★                                  | 6" 1100LM round downlight - 2700K  | 40,000             | 85                  | 120     | 14      | 1100   | 78.6  | 2700K | 80   | 110°       | 0.8          | 6.7               |  |
|  | DDR60130                         | ★                                  | 6" 1100LM round downlight - 3000K  | 40,000             | 85                  | 120     | 14      | 1100   | 78.6  | 3000K | 80   | 110°       | 0.8          | 6.7               |  |
|  | DDR60140                         | ★                                  | 6" 1100LM round downlight - 4000K  | 40,000             | 85                  | 120     | 14      | 1100   | 78.6  | 4000K | 80   | 110°       | 0.8          | 6.7               |  |
|  | DDR60150                         | ★                                  | 6" 1100LM round downlight - 5000K  | 40,000             | 85                  | 120     | 14      | 1100   | 78.6  | 5000K | 80   | 110°       | 0.8          | 6.7               |  |
|  | DDR80127                         | ★                                  | 8" 1550LM round downlight - 2700K  | 40,000             | 120                 | 120     | 18      | 1550   | 86.1  | 2700K | 80   | 110°       | 0.8          | 8.7               |  |
|  | DDR80130                         | ★                                  | 8" 1550LM round downlight - 3000K  | 40,000             | 120                 | 120     | 18      | 1550   | 86.1  | 3000K | 80   | 110°       | 0.8          | 8.7               |  |
|  | DDR80140                         | ★                                  | 8" 1550LM round downlight - 4000K  | 40,000             | 120                 | 120     | 18      | 1550   | 86.1  | 4000K | 80   | 110°       | 0.8          | 8.7               |  |
|  | DDR80150                         | ★                                  | 8" 1550LM round downlight - 5000K  | 40,000             | 120                 | 120     | 18      | 1550   | 86.1  | 5000K | 80   | 110°       | 0.8          | 8.7               |  |
|  | <b>SQUARE SNAP-IN DOWNLIGHTS</b> |                                    |                                    |                    |                     |         |         |        |       |       |      |            |              |                   |  |
|  | DDR40227                         | ★                                  | 4" 750LM square downlight - 2700K  | 40,000             | 75                  | 120     | 13      | 750    | 57.7  | 2700K | 80   | 110°       | 0.8          | 4.6               |  |
|  | DDR40230                         | ★                                  | 4" 750LM square downlight - 3000K  | 40,000             | 75                  | 120     | 13      | 750    | 57.7  | 3000K | 80   | 110°       | 0.8          | 4.6               |  |
|  | DDR40240                         | ★                                  | 4" 750LM square downlight - 4000K  | 40,000             | 75                  | 120     | 13      | 750    | 57.7  | 4000K | 80   | 110°       | 0.8          | 4.6               |  |
|  | DDR40250                         | ★                                  | 4" 750LM square downlight - 5000K  | 40,000             | 75                  | 120     | 13      | 750    | 57.7  | 5000K | 80   | 110°       | 0.8          | 4.6               |  |
|  | DDR60227                         | ★                                  | 6" 1000LM square downlight - 2700K | 40,000             | 85                  | 120     | 14      | 1000   | 71.4  | 2700K | 80   | 110°       | 0.8          | 6.6               |  |
|  | DDR60230                         | ★                                  | 6" 1000LM square downlight - 3000K | 40,000             | 85                  | 120     | 14      | 1000   | 71.4  | 3000K | 80   | 110°       | 0.8          | 6.6               |  |
|  | DDR60240                         | ★                                  | 6" 1000LM square downlight - 4000K | 40,000             | 85                  | 120     | 14      | 1000   | 71.4  | 4000K | 80   | 110°       | 0.8          | 6.6               |  |
|  | DDR60150                         | ★                                  | 6" 1000LM square downlight - 5000K | 40,000             | 85                  | 120     | 14      | 1000   | 71.4  | 5000K | 80   | 110°       | 0.8          | 6.6               |  |
|  | DDR80227                         | ★                                  | 8" 1400LM square downlight - 2700K | 40,000             | 120                 | 120     | 18      | 1400   | 77.8  | 2700K | 80   | 110°       | 0.8          | 8.7               |  |
|  | DDR80230                         | ★                                  | 8" 1400LM square downlight - 3000K | 40,000             | 120                 | 120     | 18      | 1400   | 77.8  | 3000K | 80   | 110°       | 0.8          | 8.7               |  |
|  | DDR80240                         | ★                                  | 8" 1400LM square downlight - 4000K | 40,000             | 120                 | 120     | 18      | 1400   | 77.8  | 4000K | 80   | 110°       | 0.8          | 8.7               |  |
| DDR80250   | ★                                | 8" 1400LM square downlight - 5000K | 40,000                             | 120                | 120                 | 18      | 1400    | 77.8   | 5000K | 80    | 110° | 0.8        | 8.7          |                   |  |