

**DESCRIPTION**

The Ovation Series is a complete family of recessed direct/indirect luminaires featuring pleasant modern architectural styling, computer-designed optics and the latest energy efficient lamp and ballast technology. The luminaire combines a matte white indirect reflector and a perforated direct lamp shield to provide optimum brightness control. All components are located above the ceiling plane for a clean architectural appearance in the finished space. Carefully balanced design elements combine to provide an efficient and exciting alternative to traditional general lighting. Ovation is an excellent choice for a wide variety of commercial applications.

<b>Catalog #</b>		<b>Type</b>
<b>Project</b>		
<b>Comments</b>		<b>Date</b>
<b>Prepared by</b>		

**SPECIFICATION FEATURES**

**Construction**

Nominal 6" deep housing is die formed of code gauge, prime cold rolled steel. Heavy gauge end plates are securely attached with screws for strength and rigidity and the elimination of gaps. Four auxiliary fixture end suspension points are provided. KOs for continuous row wiring. Large access plate for supply connection.

**Electrical\***

Ballasts are CBM/ETL Class "P" and are positively secured. Biax models use 2G11 base lampholders with double edge wiping action pressure lock contacts and vertically oriented lamp support clips. T8 models use rotor-lock lampholders for positive lamp retention. UL/CUL listed. Suitable for damp locations.

**Ballast Access**

Ballast can be removed from below without tools or from above using the unique ballast mounting/access plate.

**Finish**

Durable cold rolled steel with multistage, iron phosphate pretreatment and white enamel finish to ensure maximum bonding and rust inhibition.

**Reflectors**

Indirect reflector has high reflectance baked matte white enamel finish for luminous uniformity. Positively retained direct lamp shield is constructed of heavy gauge perforated steel with high reflectance painted after fabrication finish and milky white overlay diffuser for visual comfort. All reflectors are precision formed in a computer-controlled operation.

**Controls**

Fifth Light ballast options are offered for both 0-10V continuous dimming and DALI applications. Combine with energysaving products like occupancy sensors, daylighting controls, and lighting relay panels from Eaton to maximize energy savings.



**2RDI**  
128T8, 132  
228T8, 232  
328T8, 332  
T1BX40, T2BX40  
T3BX40

**T8 OR BIAxIAL LAMPS**

2' X 4' Recessed  
Direct/Indirect  
Center-Mount

**Ovation™**



**ENERGY DATA**

Input Watts:

**EB Ballast & STD Lamps**  
128T8 (28), 228T8 (49), 328T8 (67)  
132 (32), 232 (61), 332 (91),  
T1BX40 (70), T2BX40 (140),  
T3BX40 (210)  
T1BX50 (106), T2BX50 (212)  
T3BX50 (318)  
T1BX55 (110), T2BX55 (220)  
T3BX55 (330)

**LER = FL65**  
**Catalog Number: 2RDI-232RF**

**Yearly Cost of 1000 lumens,  
3000 hrs at .08 KWH = \$3.69**

\*Reference the lamp/ballast data in the  
Technical Section for specific lamp/ballast  
requirements.

\*\*Consult Pre Sales Technical Support.  
\*\*\*See Drywall Frame Kit Accessory


**LAMPS CONTAIN MERCURY. DISPOSE ACCORDING TO  
LOCAL, STATE OR FEDERAL LAWS**

**LINEAR DISCONNECT**


Safe and convenient means of  
disconnecting power.




ADF091048

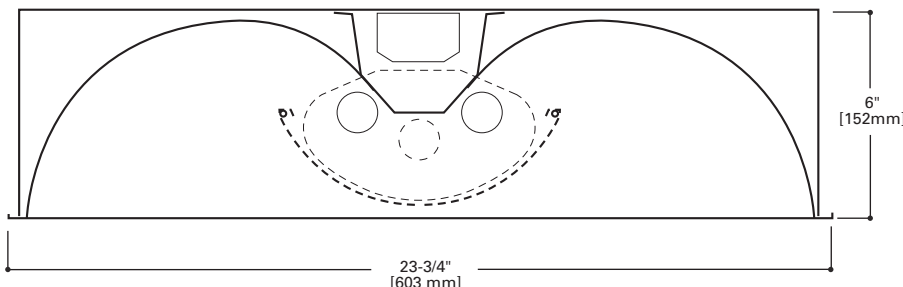


**MOUNTING DATA**

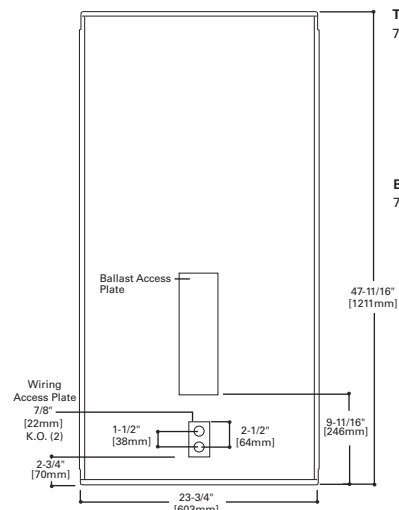


**LAMP CONFIGURATIONS**



**CEILING COMPATIBILITY**

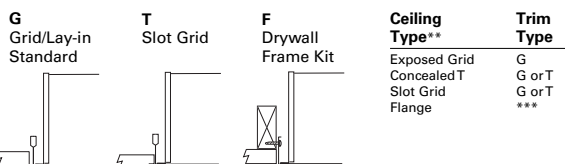

PHOTOMETRICS



**2RDI-232RP**  
 Electronic Ballast  
 F032/830/XP3 Lamps  
 3100 Lumens

Spacing criterion:  
 (H) 1.2 x mounting  
 height, (L) 1.4 x  
 mounting height

Efficiency 70.7 %

Test Report:  
 2RDI232RP.IES

LER = FL61

Yearly Cost of 1000  
 lumens, 3000 hrs at  
 .08 KWH = \$3.93

**Coefficients of Utilization**

rc	Effective floor cavity reflectance																						
	80%				70%				20%														
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0%		
<b>RCR</b>	<b>0</b>	84	84	84	84	82	82	82	82	79	79	79	75	75	75	72	72	72	71				
	<b>1</b>	77	73	70	67	75	71	68	66	68	66	64	66	64	62	63	61	60	58				
	<b>2</b>	69	63	58	54	67	62	57	53	59	55	52	57	54	51	55	52	50	48				
	<b>3</b>	63	55	49	44	61	54	48	44	52	47	43	50	46	42	48	45	42	40				
	<b>4</b>	57	49	42	37	56	48	42	37	46	41	36	44	40	36	43	39	35	34				
	<b>5</b>	53	43	37	32	51	42	36	32	41	35	31	39	35	31	38	34	31	29				
	<b>6</b>	48	39	32	28	47	38	32	27	37	31	27	36	31	27	34	30	27	25				
	<b>7</b>	45	35	29	24	44	34	28	24	33	28	24	32	27	24	31	27	24	22				
	<b>8</b>	42	32	26	21	41	31	25	21	30	25	21	30	25	21	29	24	21	20				
	<b>9</b>	39	29	23	19	38	29	23	19	28	23	19	27	22	19	26	22	19	18				
	<b>10</b>	36	27	21	17	36	27	21	17	26	21	17	25	20	17	24	20	17	16				

**Zonal Lumen Summary**

Zone	Lumens	%Lamp	%Fixture
<b>0-30</b>	1088.56	17.6	24.8
<b>0-40</b>	1810.67	29.2	41.3
<b>0-60</b>	3339.06	53.9	76.2
<b>0-90</b>	4383.85	70.7	100.0
<b>0-180</b>	4383.85	70.7	100.0

**Luminance Data**

Angle in Deg	Average 0-Deg cd/sm	Average 45-Deg cd/sm	Average 90-Deg cd/sm
<b>0-30</b>	1801	2068	2279
<b>0-40</b>	1693	2130	2393
<b>0-60</b>	1519	2142	2380
<b>0-90</b>	1284	1893	2125
<b>0-180</b>	953	1397	1545

**Candela**

Angle	Along H	45°	Across
<b>0</b>	1372	1372	1372
<b>5</b>	1367	1370	1374
<b>10</b>	1348	1357	1365
<b>15</b>	1316	1334	1351
<b>20</b>	1273	1302	1332
<b>25</b>	1216	1261	1304
<b>30</b>	1148	1212	1271
<b>35</b>	1071	1156	1231
<b>40</b>	984	1092	1182
<b>45</b>	889	1021	1125
<b>50</b>	785	941	1053
<b>55</b>	678	853	958
<b>60</b>	564	753	846
<b>65</b>	448	632	702
<b>70</b>	335	498	539
<b>75</b>	232	342	384
<b>80</b>	139	205	228
<b>85</b>	58	85	94
<b>90</b>	0	0	0

**ORDERING INFORMATION**

SAMPLE NUMBER: 2RDI-232RP-120V-EB51-U

<p><b>Rating</b> Blank=Standard NY=New York City Rated ATW-SW4=Chicago Rated</p>		<p><b>Number of Lamps</b> 1=1 Lamp 2=2 Lamp 3=3 Lamp T1=2' x 4' Fixture with One Biax Lamp at Each End T2=2' x 4' Fixture with Two Biax Lamps at Each End T3=2' x 4' Fixture with Three Biax Lamps at Each End</p>	<p><b>Lamp Shield</b> X=Solid Matte White RP=Round Perforated White Steel</p>	<p><b>Ballast Type</b> Blank=Standard Magnetic Biax Ballast EB8_=T8 Electronic Start. Total Harmonic Distortion &lt; 10% EB8_/PLUS=T8 Electronic Start. Total Harmonic Distortion &lt; 10%. High Ballast Factor &gt; 1.15. ER8_=T8 Electronic Program Rapid Start. Total Harmonic Distortion &lt; 10% EB5_=T5 Biax Electronic Instant Start. Total Harmonic Distortion &lt; 20%<sup>(6)</sup> TEB5_=T5 Biax Electronic Instant Start. Total Harmonic Distortion &lt; 10%<sup>(6)</sup> ER5_=T5 Biax Electronic Program Rapid Start. Total Harmonic Distortion &lt; 10% <b>High Performance T8 Ballasts</b> HB8_=T8 Electronic Instant Start. Total Harmonic Distortion &lt; 10%. Standard Ballast Factor .86 - .88 HB8_L=T8 Electronic Instant Start. Total Harmonic Distortion &lt; 10%. Low Ballast Factor .77 - .82 HB8_N=T8 Electronic Instant Start. Total Harmonic Distortion &lt; 10%. Normal Ballast Factor 1.0 HB8_H=T8 Electronic Instant Start. Total Harmonic Distortion &lt; 10%. High Ballast Factor 1.15 - 1.20 HR8_T8=T8 Electronic Program Rapid Start. Total Harmonic Distortion &lt; 10%. Standard Ballast Factor .86 - .88 HR8_DIM=T8 Electronic Program Rapid Start. Total Harmonic Distortion &lt; 10%. Step Dimming. Ballast Factor .88 HR8_L=T8 Electronic Program Rapid Start. Total Harmonic Distortion &lt; 10%. Low Ballast Factor .71 - .79 HR8_H=T8 Electronic Program Rapid Start. Total Harmonic Distortion &lt; 10%. High Ballast Factor 1.15 - 1.20 <b>0-10V Dimming Ballasts</b><sup>(7)</sup> SLTV8_=T8 0-10V Program Rapid Start. Total Harmonic Distortion &lt; 10%. Ballast Factor 0.87<sup>(11), (12), (13)</sup> SLTVS8_=T8 0-10V Spec Grade Program Rapid Start. Total Harmonic Distortion &lt; 10%. Ballast Factor 0.87<sup>(8), (9), (10)</sup> <b>Fifth Light DALI Ballasts</b><sup>(6)</sup> 5LT8_=T8 DALI Program Rapid Start. Total Harmonic Distortion &lt; 10%. Ballast Factor 1.0 5LT5B_=T5 Biax DALI Program Rapid Start. Total Harmonic Distortion &lt; 10%. Ballast Factor 1.0</p>	<p><b>Options</b> RLS=Rotor-Lock Socket (T8 Lamps Only) RIF1=Radio Interference Suppressor REP=Riveted Endplates LSC=Lamp Shield Cable ST=Semi-Specular Tannenbaum</p>
<p><b>Width</b> 2=2' Width</p>			<p><b>Voltage</b><sup>(2)</sup> 120V=120 Volt 277V=277 Volt 347V=347 Volt UNV=Universal Voltage 120-277</p>		<p><b>Packaging</b> U=Unit Pack PALC=Palletized Fixtures in Carton</p>
<p><b>Series</b> RDI=Ovation Series (Recessed Direct/Indirect)</p>			<p><b>Options</b> GL=Single Element Fuse GM=Double Element Fuse Lamps=Lamps Installed Flex=Flex Installed EL=Emergency Installed</p>		
<p><b>Trim Type</b> Leave Blank=Grid/Lay-in (Standard)</p>					
<p><b>Lamp Position</b> Leave Blank=Center Mounted Lamps (Standard)</p>					<p><b>ACCESSORIES</b> EQ=T-BAR Safety Earthquake Clips<sup>(4)</sup> DF-24-W=Drywall Frame Kit</p>
		<p><b>Wattage</b> 28T8=28W T8 (48") 32=32WT8 (48") BX40=40W Biax (24") BX50=50W Biax (24")<sup>(11)</sup> BX55=55W Biax (24")<sup>(11)</sup></p>			

**NOTES:** <sup>(1)</sup> 2' x 2' and 2' x 4' Center Lamp Shield models only. <sup>(2)</sup> Products also available in non-US voltages and frequencies for international markets. <sup>(3)</sup> Not available in UNV voltages. Must specify voltage. <sup>(4)</sup> An EQ Grid Clip is recommended for all 9/16" ceiling systems. Four required per fixture. <sup>(5)</sup> Not available in UNV voltages. Must specify voltage. <sup>(7)</sup> 0-10V ballast do not include DALI feature. Please select DALI ballast for use with Fifth Light system. <sup>(8)</sup> Specification grade 0-10V dimming ballast are NEMA premium and CEE listed. They are compatible with low mercury and energy saving lamps. <sup>(9)</sup> Specification Grade 0-10V ballast not available for Biax lamps. <sup>(10)</sup> Specification Grade 0-10V ballast not offered in 3 or 4-lamp versions. <sup>(11)</sup> Standard 0-10V ballast not available for Biax lamps. <sup>(12)</sup> Standard 0-10V ballast not available for 28WT8 lamps. <sup>(13)</sup> Voltage must be specified for Standard 0-10V 32W 3 and 4-lamp ballast. 4-lamp ballast versions must be 277V.

For complete product data, reference the Fluorescent Specification binder. Specifications & dimensions subject to change without notice. Consult your Eaton Representative for availability and ordering information.

**SHIPPING INFORMATION**

Catalog No.	Wt.
2RDI-132RP	30 lbs.
2RDI-128T8RP	30 lbs.
2RDI-232RP	30 lbs.
2RDI-228T8RP	30 lbs.
2RDI-332RP	30 lbs.
2RDI-328T8RP	30 lbs.
2RDI-T1BX40	31 lbs.
2RDI-T2BX40	31 lbs.
2RDI-T3BX40	31 lbs.