



Item#: **PLT-20165**
LED EMERGENCY ADJ. SQUARE LIGHT
 EMERGENCY EXIT SIGNS & LIGHTING

FEATURES

- Innovative, snap-together design allows for fast and easy installation
- Two fully adjustable glare free square shape light heads for emergency light
- Low voltage battery disconnection preventing deep discharge damage to the battery
- Easily removed mounting knock outs and J box pattern on back panel
- UL 5VA flame rating

APPLICATION

Emergency exit lighting is used in a wide variety of places such as; movie theaters, commercial buildings, restaurants, and hotels.

ELECTRICAL

Wattage	2.5W
Voltage	120/277V

LIGHTING PERFORMANCE

Lumens	200
Lumens Per Watt (Lm/W)	80
Color Temperature (CCT)	6000K

ENVIRONMENT

Operating Temperature	50° ~ 104°F
Suitable Location	DAMP Indoor / Covered Ceilings
Ingress Protection Rating	IP43

LIFESPAN

Average Life (Hours)	35,000
Warranty (Years)	3

COMPONENTS

Battery	3.6V Ni-Cad
Emergency Lamps	(2) 1.25W LED Module
LED	6 per head
Discharge Time	90 Minutes
Recharge Time	24 Hours

CONSTRUCTION

Housing	Thermoplastic ABS
Base / Power Supply	Hard Wired
Finish	White
Mounting	Wall or Ceiling

QUALIFICATIONS




Published lumens on LED products are approximate and may vary slightly.

Item#: **PLT-20165**
LED EMERGENCY ADJ. SQUARE LIGHT

DIMENSIONS (Inches)

Length	12.3"
Width/Depth	4"
Height	5.1"
Weight (Lbs)	--

Line drawings may not be to scale and are for general reference only.

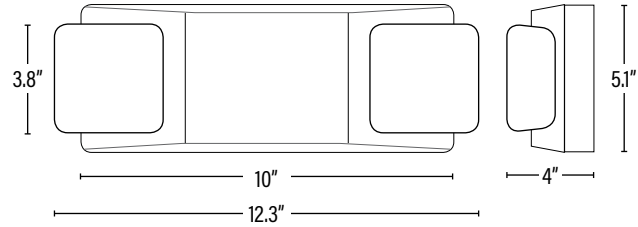

SUPPORTING DOCUMENTS (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	6	10811768023418	14" x 13.6" x 11.8"	14.3
Individual Box	1	811768023411	13.3" x 5.5" x 4.1"	--
Country of Origin	China			
HS Tariff	9405.60.6000			

ORDERING

ITEM#	DESCRIPTION	CASE
PLT-20165	ADJUSTABLE SQUARE LED EMERGENCY LIGHT - BATTERY BACKUP	6

ADDITIONAL INFORMATION:

Recommended Center to Center Spacing: 24'

PERFORMANCE DATA

PACKAGING