

T5 25W HO 4FT. BYP TITANIUM LED SERIES



PRO



BYPass

25W REPLACES



54W
Fluo.

60% Energy Savings

- Build-in universal voltage driver - Bypass installation
- Symmetrical driver design provides uniform light output
- Wide beam design: 270° light emitting area
- Durable plastic construction meets NSF requirements
- High efficacy 128 LPW
- Suitable for use in totally enclosed fixtures




50,000 H



120-277V

UNIVERSAL




128

LPW

EFFICACY



5 YR
WARRANTY



82
CRI (Ra)



ENCLOSED



TUBE FEATURES

Symmetrical Driver Design

Unlike other T5 bypass tubes, GREEN CREATIVE's symmetrical driver design provides uniform light output for end-to-end lighting with no dark spots. This ensures fixtures maintain the traditional look of T5 fluorescent tubes.

GREEN CREATIVE T5 BYP




Other T5 BYP

Suitable for All T5 Applications



BYPASS INSTALLATION

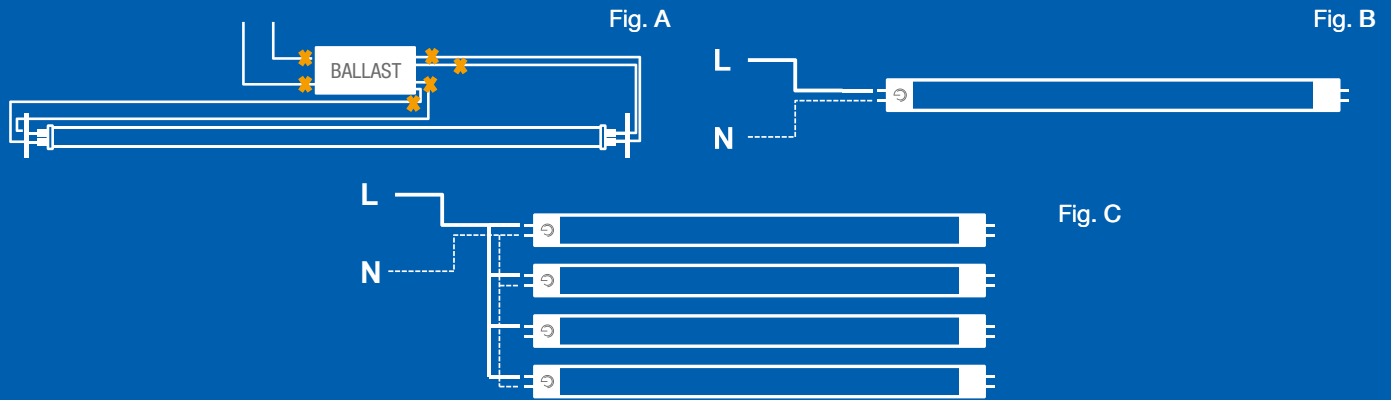

- 🕒 Bypass ballast by cutting all wires as in Fig. A
- 🕒 Directly wire Live + Neutral on a single end as in Fig. B for single tube or as in Fig. C for multiple tubes
- 🕒 Replace shunted lamp holder with non-shunted one if applicable (Instant Start)
- 🕒 Existing fixture maintains original UL compliance thanks to UL1598C tube

SPECIFICATIONS

Product Model	98302 25T5HO/4F/830/BYP	98303 25T5HO/4F/835/BYP	98304 25T5HO/4F/840/BYP	98305 25T5HO/4F/850/BYP
Type	T5	T5	T5	T5
Base	Mini Bi-Pin G5	Mini Bi-Pin G5	Mini Bi-Pin G5	Mini Bi-Pin G5
Power (W)	25	25	25	25
Voltage - Frequency	120-277V 50-60Hz	120-277V 50-60Hz	120-277V 50-60Hz	120-277V 50-60Hz
Color Temp. (ANSI)	Warm White 3000K	Neutral White 3500K	Cool White 4000K	Daylight 5000K
CRI (Ra)	82	82	82	82
Typical lumens (lm)	3200	3200	3200	3200
Efficacy (LPW)	128	128	128	128
Light Emitting Area	270°	270°	270°	270°
Beam Angle	120°	120°	120°	120°
Dimmable	No	No	No	No
Power Factor	0.9	0.9	0.9	0.9
THD	<20%	<20%	<20%	<20%
Rated Lifetime - L70 (hrs.)	50,000	50,000	50,000	50,000
Dia. x MOL	0.74" x 46" (19 x 1168mm)	0.74" x 46" (19 x 1168mm)	0.74" x 46" (19 x 1168mm)	0.74" x 46" (19 x 1168mm)
Weight (lb. / g)	0.41lb. / 186g	0.41lb. / 186g	0.41lb. / 186g	0.41lb. / 186g

* Suitable for use in totally enclosed fixtures

** Suitable for damp locations. Not for use where directly exposed to the weather or water

*** Full installation guide and more details available on website