

Type-A I Ballast Compatible Replaces 32W 4ft Fluorescent T8




Superior All-Around Light Distribution

FEATURES

- Ballast Compatible to Existing Fixture - Plug-n-Play Installation
- Full Glass Lens with 320° Light Distribution
- Uniform Light Output From End-to-End
- Universal Input Voltage - 120-277V
- 1-Year, 50,000 Hr Warranty
- Instant-ON with No Flicker
- UL Listed



Proprietary IC-Driver design allows for high efficiency and exceptional longterm performance



ARCHIPELAGO® Light Engine produces uniform light output from end-to-end




Specifications and Technical (ECO T8 I Type-A)

| MODEL | BASE TYPE | WATTS / EQV. | LUMEN | CCT | LENGTH | VOLTAGE | CRI | PF | CARTON QTY | LIGHT DISTRIBUTION |
|------------|------------|--------------|--------|-------|--------|----------|-----|------|------------|--------------------|
| LBT8F1641B | Bi-Pin G13 | 18W / 32W | 1650LM | 4100K | 4FT | 120-277V | 83 | >0.9 | 25 | 320° |
| LBT8F1750B | Bi-Pin G13 | 18W / 32W | 1700LM | 5000K | 4FT | 120-277V | 83 | >0.9 | 25 | 320° |
| LBT8F2241B | Bi-Pin G13 | 18W / 32W | 2200LM | 4100K | 4FT | 120-277V | 83 | >0.9 | 25 | 320° |
| LBT8F2350B | Bi-Pin G13 | 18W / 32W | 2300LM | 5000K | 4FT | 120-277V | 83 | >0.9 | 25 | 320° |

* Suitable for use in totally enclosed fixtures

** Suitable for damp locations. Not for use where exposed to the weather or moisture

Installation Configuration

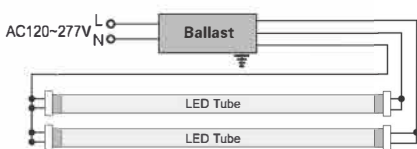

Light Distribution

