



LED LAMPS

ProLED® **GU24 A19 Omnidirectional Series**



Omnidirectional



Enclosed Rated



ENERGY STAR®

ProLED® GU24 Omnidirectional A-Shape Series lamps offer an economical and even more energy efficient alternative to non-dimmable compact fluorescent lamps



Omnidirectional Optical Design Provides 230° Light Distribution

UL Listed for Damp Location & Enclosed Luminaires

ENERGY STAR® Certified

Backed by a 3-Year Warranty

Applications:

- Home
- Education
- Hospitality
- Retail

Markets:


- Residential
- Commercial

ProLED®


GU24 A19 Omnidirectional Series

Specifications

- Available in 2700K, 3000K, 4000K or 5000K CCT
- UL Listed for damp location and enclosed luminaires
- 230° degree beam angle creates uniform distribution of light
- 3-year warranty
- Rated for ICAT fixtures
- Non-Dimmable

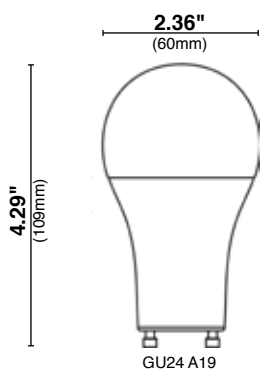

Savings Comparison

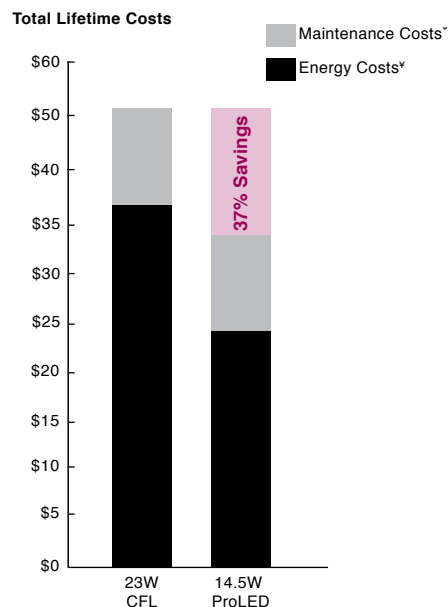

Ordering Information



| | Watts | Base | Product # | Product Code | Volts | Color Temp. | CRI | Lumens | Useful Life* | Beam Angle | Pkg. Qty. | MOL | Equivalent CFL Wattage |
|---|-------|-----------|-----------|---------------------------|-------|-------------|-----|--------|--------------|------------|-----------|-------|------------------------|
| ⊕ | 9 | GU24 Base | 83080 | A19FR9/827/OMNI/GU24/LED | 120 | 2700K | 82 | 800 | 15,000 | 230° | 1/6 | 4.29" | 13 |
| ⊕ | 9 | GU24 Base | 83081 | A19FR9/830/OMNI/GU24/LED | 120 | 3000K | 82 | 800 | 15,000 | 230° | 1/6 | 4.29" | 13 |
| ⊕ | 9 | GU24 Base | 83082 | A19FR9/840/OMNI/GU24/LED | 120 | 4000K | 82 | 800 | 15,000 | 230° | 1/6 | 4.29" | 13 |
| ⊕ | 9 | GU24 Base | 83083 | A19FR9/850/OMNI/GU24/LED | 120 | 5000K | 82 | 800 | 15,000 | 230° | 1/6 | 4.29" | 13 |
| ⊕ | 11 | GU24 Base | 83084 | A19FR11/827/OMNI/GU24/LED | 120 | 2700K | 82 | 1100 | 15,000 | 230° | 1/6 | 4.29" | 18 |
| ⊕ | 11 | GU24 Base | 83085 | A19FR11/830/OMNI/GU24/LED | 120 | 3000K | 82 | 1100 | 15,000 | 230° | 1/6 | 4.29" | 18 |
| ⊕ | 11 | GU24 Base | 83086 | A19FR11/840/OMNI/GU24/LED | 120 | 4000K | 82 | 1100 | 15,000 | 230° | 1/6 | 4.29" | 18 |
| ⊕ | 14.5 | GU24 Base | 83087 | A19FR14/827/OMNI/GU24/LED | 120 | 2700K | 82 | 1600 | 15,000 | 230° | 1/6 | 4.29" | 23 |
| ⊕ | 14.5 | GU24 Base | 83088 | A19FR14/830/OMNI/GU24/LED | 120 | 3000K | 82 | 1600 | 15,000 | 230° | 1/6 | 4.29" | 23 |
| ⊕ | 14.5 | GU24 Base | 83089 | A19FR14/840/OMNI/GU24/LED | 120 | 4000K | 82 | 1600 | 15,000 | 230° | 1/6 | 4.29" | 23 |

⊕ NEW ITEM!

* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

Represents lamps that are ENERGY STAR® certified.

Warranty – Commercial / Industrial: This product is warranted for 3 years from the date of purchase.

25,000 hour useful life rating is based on a maximum ambient temperature of 45°C. Exceeding this ambient temperature rating may result in reduced life.

© 2016 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change. 12-21-16. Re-order #9117