



LED Vapor Tight

Great Features/Benefits

The TCP Vapor Tight Luminaire is perfect for your wet location low bay needs. Providing ample light at a low energy cost, the vapor tight is ready for the worst weather. With a plastic frame, and included mounting hardware, the TCP Vapor Tight is durable and quick to install.

- Plastic cover and frame
- Frosted PC lens for glare control
- Wet location rated: IP65
- Long life: 50,000 hours
- Operating temperature: -5° to 104°F
- Wide beam spread

Limitless Options for the following applications:

- Parking Garages
- Car Washes
- Cold Storage
- Garden Centers
- Corridors
- Stairwells
- Hallways



5 YEAR
WARRANTY*

LED Vapor Tight

Applications

The TCP Vapor Tight can be effectively used in low mounted indoor and outdoor locations. Recommended for commercial or industrial settings such as parking garages, car washes, cold storage, garden centers and more.

Construction


- Housing: plastic cover and frame
- Quick access to wiring from end caps

Electrical

- cULus wet location rated
- Easy-to-access wiring compartment
- System rated for long 50,000 hour life
- Efficiently delivers >125 LPW

Optics

- Frosted PC plastic lens to prevent discoloration
- Delivers bright, white light and excellent uniformity

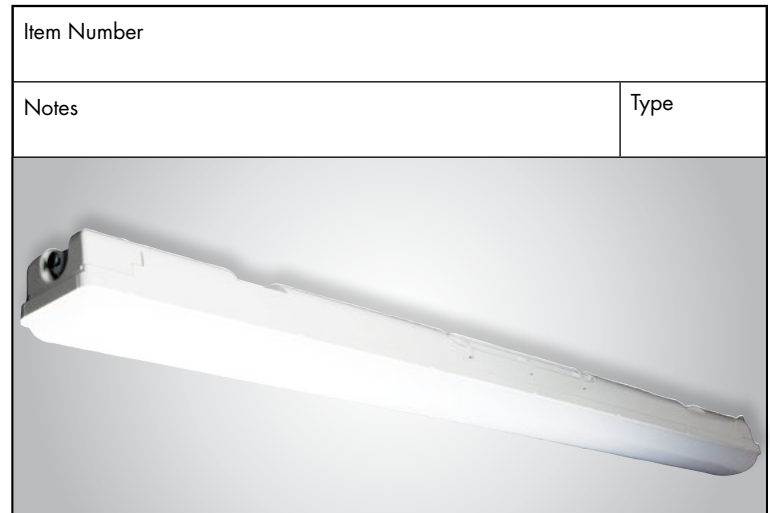


Warranty

Five year limited warranty against defects in manufacturing.

Listings

UL and cUL listed
RoHS Compliant

DLC v4.3 Standard

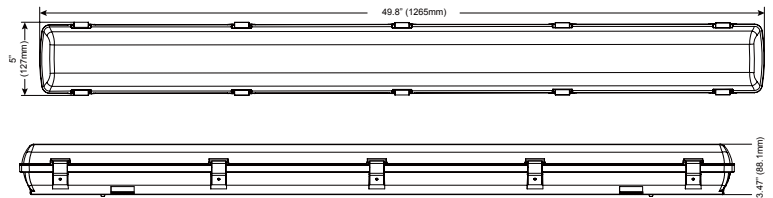

ITEM #	DESCRIPTION	DLC	LUMENS	WATTAGE	LPW	VOLTAGE	POWER FACTOR	CCT	CRI	LIFE	L(in.)	H(in.)	W(in.)
LED Vapor Tight • 50,000 Hour													
LVT5600135	LED Vapor Light - 35K	★	7130	56	127	120V-277v AC	≥0.9	3500K	80	50000	49.8	3.47	5
LVT5600140	LED Vapor Light - 40K	★	7300	56	130	120V-277v AC	≥0.9	4000K	80	50000	49.8	3.47	5
LVT5600150	LED Vapor Light - 50K	★	7400	56	130	120V-277v AC	≥0.9	5000K	80	50000	49.8	3.47	5