


This LED tube is intended to replace fluorescent tube lamps with an ANSI designation 32W/23T8/U6 (ONLY)

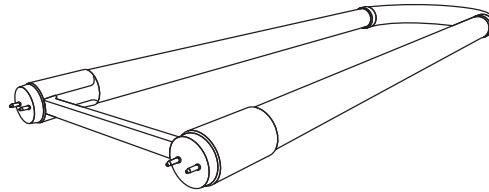


U-Bend
LED T8 Lamp
Direct Replacement

PLEASE REVIEW THE INSTRUCTIONS AND WARNINGS LISTED BELOW PRIOR TO PROPER INSTALLATION


WARNINGS	CAUTIONS
<ul style="list-style-type: none"> • Risk of fire • Ballast is required for proper operation. • Risk of electric shock – disconnect power at source before installation • Do not make or alter any open holes in an enclosure of wiring or electrical components during installation. • Do not install this lamp into a pre-heat luminaire. • If lamp or luminaire exhibits abnormal operation (buzzing, flickering, minimal light, etc.), turn off power, remove lamp and contact us. 	<ul style="list-style-type: none"> • Do not use with dimmers. • Do not look directly at the operating LED Tube. • Do not touch this product with wet hands. • Do not disassemble, repair or alter lamp. • Designed for indoor applications only. • Suitable for damp locations. • The luminaires shall be grounded. • Avoid contact with lamp pins during installation. • To prevent early lamp failure: Lamp should only be installed in operating environments ranging between -20° C and +50° C . • This Device is not intended for use with emergency exits or emergency lights.
DIRECT REPLACEMENT INSTALLATION INSTRUCTIONS	
<p>1. Turn-off power before installation 2. Replace traditional fluorescent tube with LED tube 3. Turn-on power and enjoy your new LED tube.</p>	

STEP 1

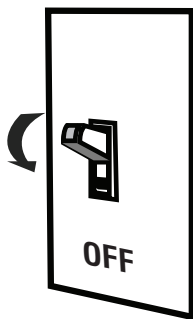


Turn-off power

STEP 2a

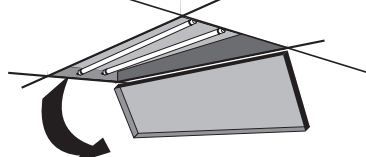


Open diffuser cover for access.

STEP 2b

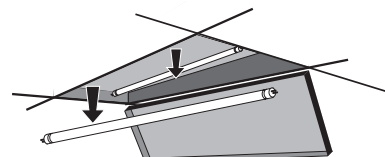


Remove existing lamp

STEP 2c

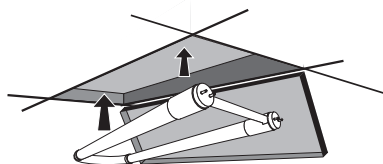


Insert new LED U-Bend T8 Lamp and ensure it is secured.

STEP 2d

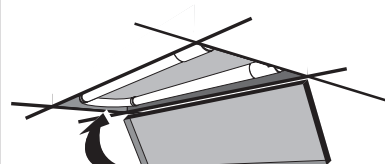


Close cover after installation is completed.

STEP 3

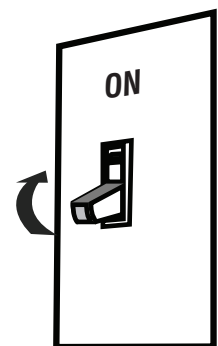

Turn-on power

NOTE: Ballast required for operation.

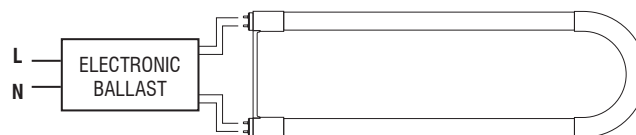

THIS PRODUCT MAY NOT BE COMPATIBLE WITH ALL BALLASTS