



# LED U6 SERIES


## DIRect LED U6 - FB34

### COMMERCIAL SPEC GRADE

Replaces 32W FB34 Fluorescent U6



#### Superior All-Around Light Distribution



#### Shatter-Resistant



Designed for high efficiency and versatility, the IC-Driver allows for exceptional DIRect performance

#### FEATURES

- DIRect Replacement for Easy Installation
- Universal Input Voltage - 120-277V, 347V
- Uniform Light Output From End-to-End
- Instant-ON with No Flicker
- 5-Year Warranty
- DLC 4.1 Listed
- UL Listed

Seamless output from end-to-end, ARCHIPELAGO® Light Engine allows for fully uniform light output




#### Specifications and Technical (U6 | DIRect)

MODEL	BASE TYPE	WATTS / EQV.	LUMEN	CCT	DIMENSION	VOLTAGE	CRI	THD	CARTON QTY	LIGHT DISTRIBUTION
LBU6D13301	Bi-Pin G13	13W / 32W	1800LM	3000K	6.0" x 22.5"	120-277, 347V	83	<20%	16	310°
LBU6D13351	Bi-Pin G13	13W / 32W	1800LM	3500K	6.0" x 22.5"	120-277, 347V	83	<20%	16	310°
LBU6D13411	Bi-Pin G13	13W / 32W	1800LM	4100K	6.0" x 22.5"	120-277, 347V	83	<20%	16	310°
LBU6D13501	Bi-Pin G13	13W / 32W	1800LM	5000K	6.0" x 22.5"	120-277, 347V	83	<20%	16	310°

\* Suitable for use in totally enclosed fixtures

\*\* Suitable for damp locations. Not for use where exposed to the weather or moisture

#### Installation Configuration

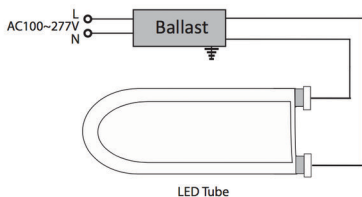

DIRect

#### Light Distribution Curve

