

# PLS 3.5W HYB G23 TITANIUM LED SERIES



PL:EDGE  
SERIES

3.5W REPLACES



7-9W  
CFL

60% Energy Savings

PRO



- Ⓞ **HYBrid installation - DIrect or BYPass**
- Ⓞ **Compatible with magnetic ballasts - DIrect installation**
- Ⓞ **Built-in universal voltage driver - BYPass installation**
- Ⓞ **180° rotatable base**
- Ⓞ **Exceptional efficacy 91 LPW**
- Ⓞ **Suitable for use in totally enclosed fixtures**



50,000 H



MAGNETIC  
BALLAST  
COMPATIBLE




120-  
277V  
UNIVERSAL



5  
YR  
WARRANTY



82  
CRI (Ra)



ENCLOSED\*



COMPACT FORM FACTOR AND ROTATABLE BASE SUITABLE FOR ALL APPLICATIONS



# PLS 3.5W HYB G23 TITANIUM LED SERIES

## APPLICATIONS

### Office



### Hospitality




### General



Ref.#:DS107-PLS-3.5W-HYB-G23-300918

**Base:** G23 (2-pin CFL)  
**Voltage:** Magnetic ballast compatible  
 120-277V  
**Dimmable:** No  
**PF:** 0.9  
**Lifetime:** 50,000 hrs  
**Weight:** 0.08lb / 38g

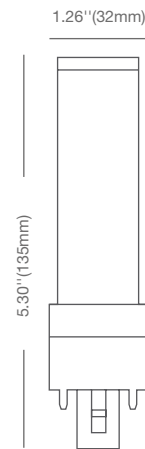

## SPECIFICATIONS

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
<b>3.5PLS/827/HYB/G23</b>	57812	3.5	Soft White 2700K	82	280	80	120°
<b>3.5PLS/830/HYB/G23</b>	57813	3.5	Warm White 3000K	82	280	80	120°
<b>3.5PLS/835/HYB/G23</b>	57814	3.5	Neutral White 3500K	82	300	86	120°
<b>3.5PLS/840/HYB/G23</b>	57815	3.5	Cool White 4000K	82	320	91	120°

\* Suitable for use in totally enclosed fixtures

\*\* Suitable for damp locations. Not for use where directly exposed to weather or water

\*\*\* Full installation guide and more details available on website