



Item#: **PLT-20135**
LED 48" DESIGNER STRIP
 DIRECT LINEAR AMBIENT LUMINARIES

FEATURES

- Diffusing lens for bright, uniform light.
- Low-profile with a limitless range of applications.
- Uses 30% less energy than a linear fluorescent fixture.
- All steel surfaces are painted after fabrication for smooth edges and rounded corners.

MOUNTING

- Designed for surface or suspended chain mounting; individually or in a continuous row.

APPLICATION

Ideal for larger warehouses, retail applications, commercial buildings and work areas.

ELECTRICAL

Wattage	32W
Voltage	100-277V
Current	0.261A
Power Factor	0.9
Total Harmonic Distortion (THD)	10

LIGHTING PERFORMANCE

Lumens	4224
Lumens Per Watt (Lm/W)	132
Color Temperature (CCT)	4000K
Color Rendering (CRI)	80
R9 (Red Value)	15
R13 (Skin Tones)	86
Beam Angle	130°
Light Distribution	Type II, Very Short
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

ENVIRONMENT

Operating Temperature	-4° ~ 122°F
Suitable Location	DAMP
Ingress Protection Rating	IP40

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	Seoul 3528
Driver	ESPEN VEL30065MVHDA

CONSTRUCTION

Housing	24 Gauge Steel
Base / Power Supply	Hard Wired
Finish	White Baked Enamel

QUALIFICATIONS




Published lumens on LED products are approximate and may vary slightly.

Item#: **PLT-20135**
LED 48" DESIGNER STRIP

DIMENSIONS (Inches)

Length	48"
Width/Diameter	3.4"
Height	3.6"
Weight (Lbs)	6.3

Line drawings may not be to scale and are for general reference only.

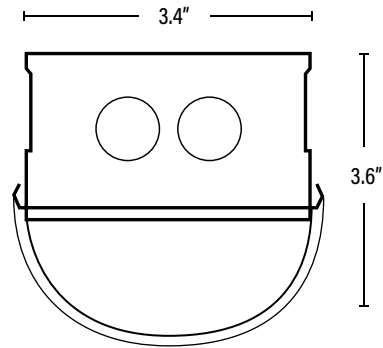

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	6	10811768027256	46.6" x 11.7" x 8.4"	37.9
Individual Box	1	811768027259	--	--
Country of Origin	China			
HS Tariff	9405.40.6000			

ORDERING

ITEM#	DESCRIPTION	CASE
PLT-20135	LED 48" DESIGNER STRIP - 32W/40K/120-277V/DIMMABLE - DLC®	6

ACCESSORIES/REPLACEMENT PARTS

PLT-54896	360° LED LOW/HIGH BAY FIXTURE PIR OCCUPANCY SENSOR 800W/1200W-120-277V	50
-----------	--	----