

FEATURES

- System Light Efficacy 125 LPW
- Easy Installation & Maintenance
- IP65
- 5 Year Warranty
- Optional Shade Included for Field Installation
- ETL and DLC Listed
- DLC® Part number: PLTE6214



50% ENERGY EFFICIENCY & LONG LIFE
60% MORE ENERGY EFFICIENT THAN STANDARD HID LAMPS
TYPICAL PAYBACK OF 1 - 3 YEARS

SKU #	Kelvin	Lumens	CRI	Wattage	Voltage	DLC?	Mounting	Life Hours	Warranty
-------	--------	--------	-----	---------	---------	------	----------	------------	----------

PLT-10957	3500	20000	80	160	120-277	YES	RING	155000	5 years
-----------	------	-------	----	-----	---------	-----	------	--------	---------

ADDITIONAL PHOTOS



FEATURES

- Easy Installation & Maintenance
- System Light Efficacy 125 LPW
- Superior Heat Management

TYPICAL APPLICATIONS

- Warehouse, Retail, Gymnasiums
- Convention Centers, Sport Arenas

WARRANTY

WARRANTY

5 Years



SPECIFICATIONS

PERFORMANCE

Philips Lumileds LED Chip
20,000 Lumen Output (IES)
160W Power Consumption
≥125 lm/W Efficacy (IES)
3500K Color Temperature
≥80 CRI
≥L70>155,000 Hours Lumen Maintenance
120-277 VAC Input Voltage
0.95 Power Factor



ENVIRONMENTAL

IP-65 Rating
-30 to 45°C Operating Temperature
15% to 90% RH Humidity

PHYSICAL

Dimensions (16.1 x 16.1 x 19.7 in.)
Weight 9.3 lbs.
Hanging Ring Mounting Options
Fixture Material Aluminum Alloy

PHOTOMETRICS

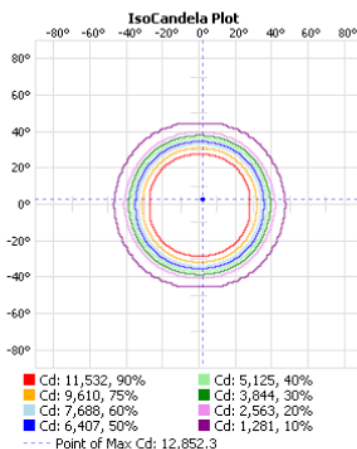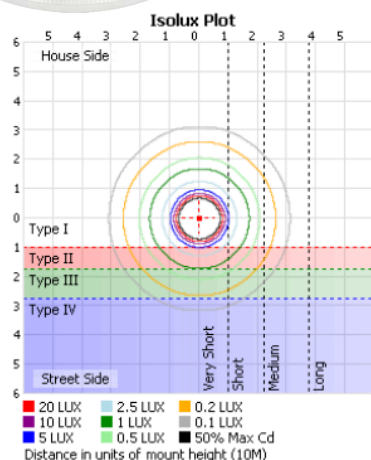

Illuminance at a Distance

	Center Beam LUX	Beam Width	
2.0M	3,199.5 LUX	2.8 M	2.8 M
4.0M	799.9 LUX	5.6 M	5.7 M
6.0M	355.5 LUX	8.3 M	8.5 M
8.0M	200.0 LUX	11.1 M	11.3 M
10.0M	128.0 LUX	13.9 M	14.2 M

■ Vert. Spread: 69.6°
■ Horiz. Spread: 70.6°