


LED

Plug-and-Play U-Bend T8 LED Tube

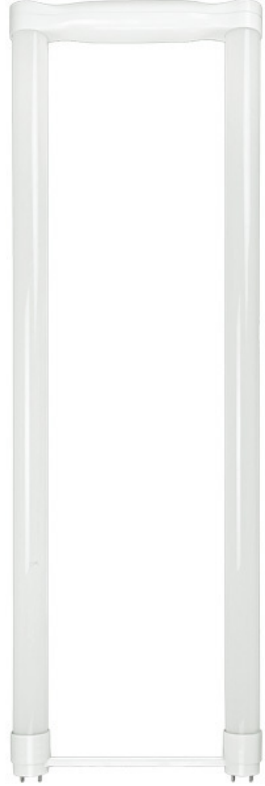

FEATURES

- Suitable replacement for 32-Watt T8 and 34 or 40-Watt T12 U-bend fluorescent tubes
- Operates with an existing electronic ballast
- Can be used with shunted and non-shunted sockets with compatible ballasts
- Has a Bi-Pin G13 base
- DLC® Part Number: PLTSP19115

TYPICAL APPLICATIONS

- Office spaces and conference rooms
- Classrooms and hallways
- Hospitals and lobbies



ROHS



SKU#	Leg Spacing	Lumens	Wattage	Kelvin	Operation	CRI	DLC?	Base	Warranty
PLT-90024	6 in.	2200	15W	5000K	Plug-and-Play	82	YES	Medium Bi-Pin	5 Year

SPECIFICATIONS

BULB SHAPE	T8	COATING	N/A
DIMMABLE	NO	FLUORESCENT EQUAL	32-WATT
SAFETY RATING	UL DAMP	COMPATIBILITY	ELECTRONIC BALLASTS
COLOR	DAYLIGHT WHITE	LAMPHOLDER(S)	SHUNTED & NON-SHUNTED
LED L70 LIFE HOURS	≥100,000	LENS	FROSTED GLASS
SYSTEM WATTAGE (INCLUDING BALLAST)	18W	LENGTH	22.425 IN.
VOLTAGE	120-277	DIAMETER	1.1 IN.