

# 90+ LIGHTING CHANDELIER C12 4.5W



**40W**  
[REPLACEMENT]

**90+**  
CRI

**4,5W**  
Watts

**E 12**  
Voltage

**120V**  
Voltage

**DAMP LOCATION**

**Dimmable**

High quality of light and color rendering (90+ CRI, 50+ R9),  
with low flicker, flicker <30%,  
Smooth dimming. Dimming lower than 10%.




## ELECTRICAL SPECIFICATIONS



MODEL NO.	LUMEN	POWER	CCT	BEAM	CRI	PF	CBCP
SE-350.041	320LM	4.5W	2700K	260°	>90	>0.9	-
SE-350.154	320LM	4.5W	3000K	260°	>90	>0.9	-

## MECHANICAL SPECIFICATIONS

MODEL NO.	MEASURES	WEIGHT	OPERATIONAL TEMPERATURE	INNER BOX QTY	MASTER CARTON QTY
SE-350.041	1.42in X 3.93in	1.38oz	-20°C - 40°C	12pcs	48pcs
SE-350.154	1.42in X 3.93in	1.38oz	-20°C - 40°C	12pcs	48pcs

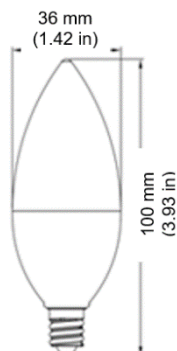

# 90+ LIGHTING CHANDELIER C12 4.5W

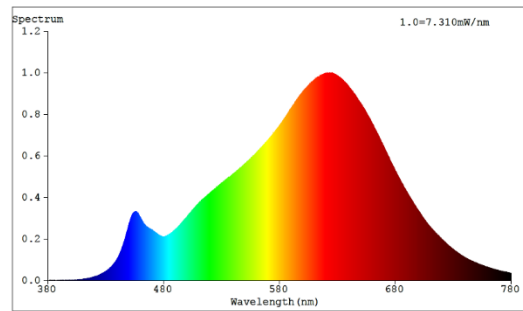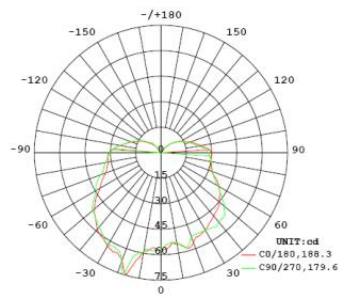


## RA – CHART: >90

RA refers to the average value of R1 to R8.

R9 is the score that represents how accurately a light source will reproduce strong red colors. "Accurate" is defined as similarity to daylight or incandescent bulbs, depending on the color temperature.

## R VALUES

R1=93	R2=98	R3=98	R4=92	R5=93	R6=97	R7=90
R8=80	R9=59	R10=95	R11=93	R12=85	R13=95	R14=100

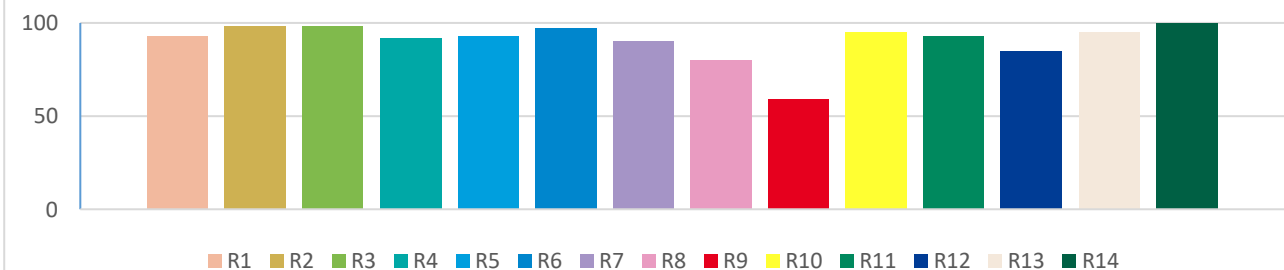

## TM30 GRAPHIC

TM-30 deals with the color rendition of object.

$R_f$ - a fidelity index that is similar to the commonly used CRI

$R_g$ - a gamut index that provides information about saturation

Color vector graphic- a graphical representation of hue and saturation relative to a reference source.

