




**40W**  
REPLACEMENT


**90+**  
CRI

**5W**  
Watts




**E26**

**120V**  
Voltage



**DAMP**  
LOCATION



**Dimmable**

High quality of light and color rendering (90+ CRI, 50+ R9),  
with low flicker, flicker <30%,  
Smooth dimming. Dimming lower than 10%.





## ELECTRICAL SPECIFICATIONS

MODEL NO.	LUMEN	POWER	CCT	BEAM	CRI	PF	CBCP
SE-350.035	350LM	5W	2700K	260°	>90	>0.9	-
<b>SE-350.036</b>	<b>350LM</b>	<b>5W</b>	<b>3000K</b>	<b>260°</b>	<b>&gt;90</b>	<b>&gt;0.9</b>	-

## MECHANICAL SPECIFICATIONS

MODEL NO.	MEASURES	WEIGHT	OPERATIONAL TEMPERATURE	INNER BOX QTY	MASTER CARTON QTY
SE-350.035	1.93in X 2.95in	1.62oz	-20°C - 40°C	12pcs	48pcs
<b>SE-350.036</b>	<b>1.93in X 2.95in</b>	<b>1.62oz</b>	<b>-20°C - 40°C</b>	<b>12pcs</b>	<b>48pcs</b>




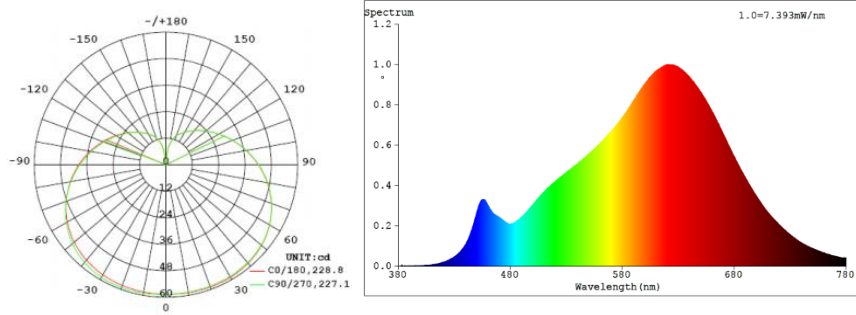

## RA – CHART: >90

RA refers to the average value of R1 to R8.

R9 is the score that represents how accurately a light source will reproduce strong red colors. "Accurate" is defined as similarity to daylight or incandescent bulbs, depending on the color temperature.

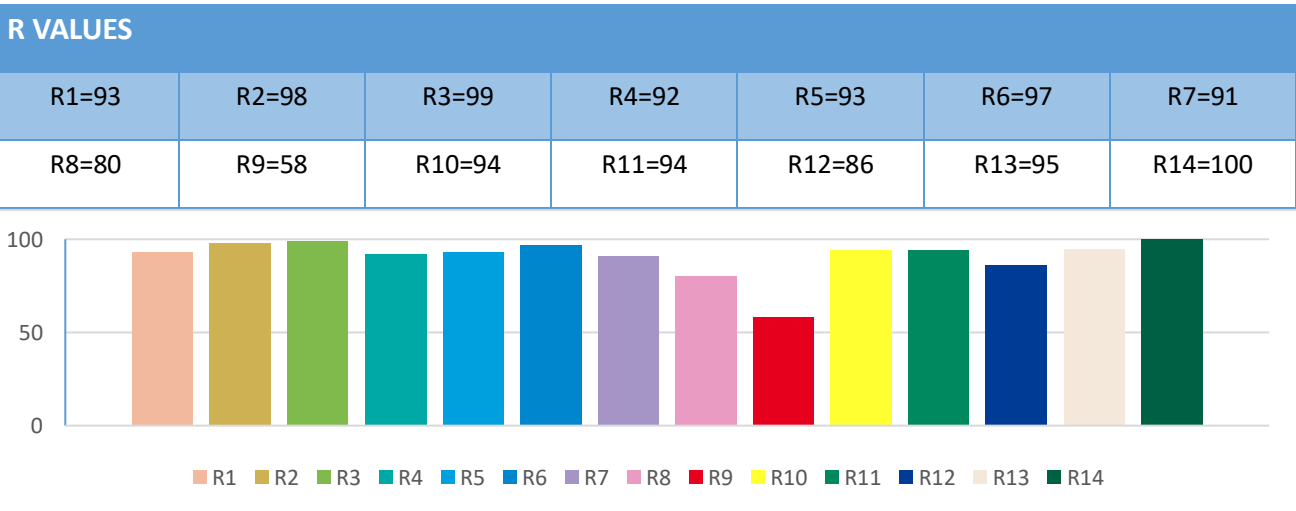

## TM30 GRAPHIC

TM-30 deals with the color rendition of object.

Rf- a fidelity index that is similar to the commonly used CRI

Rg- a gamut index that provides information about saturation

Color vector graphic- a graphical representation of hue and saturation relative to a reference source.

