

# Elements

by  TCP

## LED Wall Pack



Limitless Options  
for the following applications:

TCP's LED Non-Cutoff Wall Pack combines the look of a traditional wall pack with the benefits of LED. An efficient alternative to HID, these wall packs deliver bright uniform light while providing energy savings. A long 50,000 hour rated life significantly decreases maintenance labor and material costs over the life of the fixture.

The robust die-cast aluminum housing incorporates an impact resistant polycarbonate lens. An integrated photocell is optional for dusk-to-dawn control. The wall pack mounts directly to a standard junction box for easy retrofit of traditional fixtures.

- Site Lighting
- Security Lighting
- Entrances
- Perimeters



5 YEAR  
WARRANTY

we know light.™

### LED Non-Cutoff Wall Pack - Polycarbonate Lens

#### Applications

This product family can be effectively used in outdoor wall mount locations. Commercial, industrial, retail and healthcare exterior lighting; parking lot, cargo door, high wall, area, security, etc.

#### Construction


- Die-cast aluminum housing
- Impact resistant polycarbonate lens
- Durable dark bronze powdercoat
- Same footprint as existing HID wall packs

#### Electrical


- cULus wet location rated
- Easy-to-access wiring compartment
- System rated for long 50,000 hour life
- Efficiently delivers up to 125 LPW

#### Optics

- Prismatic polycarbonate lens
- Delivers bright, white light and excellent uniformity

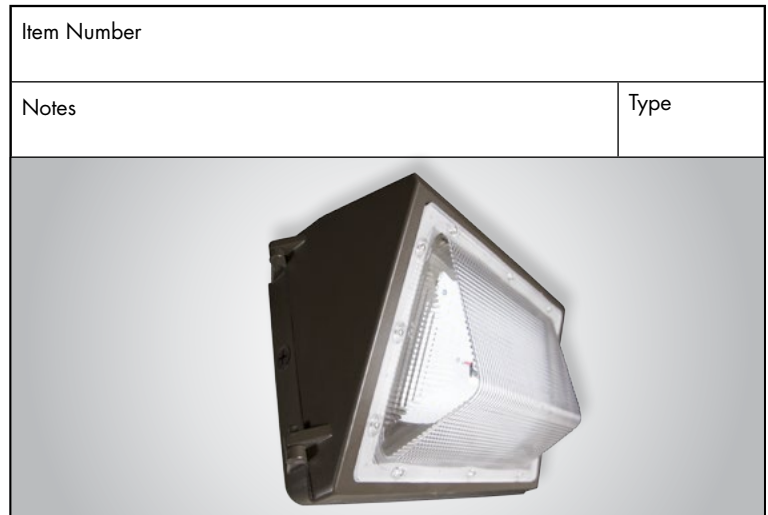

<b>Warranty</b> Five year limited warranty against defects in manufacturing.	<b>Listings</b> UL and cUL listed RoHS Compliant
---	--

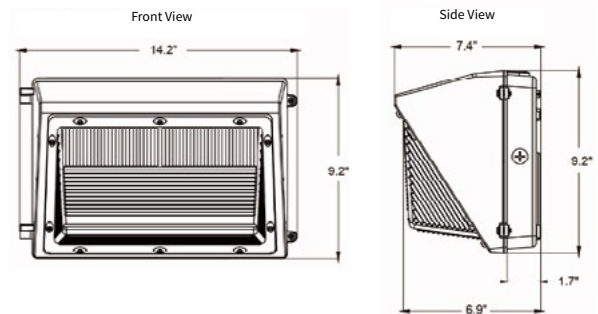

ITEM #	DESCRIPTION	LUMENS	WATTAGE	LPW	VOLTAGE	POWER FACTOR	CCT	CRI	LIFE	L(in.)	H(in.)	W(in.)
<b>LED Wall Pack • 50,000 Hour</b>												
WP5500140	LED Wall Pack - Non Dim 40K	6900	55	125.5	120 - 277V	≥0.9	4000K	>80	50000	14.2	9.2	7.4
WP5500150	LED Wall Pack - Non Dim 50K	6900	55	125.5	120 - 277V	≥0.9	5000K	>80	50000	14.2	9.2	7.4
WP5500140PC	LED Wall Pack - Non Dim 40K W/PC	6900	55	125.5	120 - 277V	≥0.9	4000K	>80	50000	14.2	9.2	7.4
<b>WP5500150PC</b>	<b>LED Wall Pack - Non Dim 50K W/PC</b>	<b>6900</b>	<b>55</b>	<b>125.5</b>	<b>120 - 277V</b>	<b>≥0.9</b>	<b>5000K</b>	<b>&gt;80</b>	<b>50000</b>	<b>14.2</b>	<b>9.2</b>	<b>7.4</b>
WP12000140	LED Wall Pack - Non Dim 40K	14500	120	120.8	120 - 277V	≥0.9	4000K	>80	50000	14.2	9.2	7.4
WP12000150	LED Wall Pack - Non Dim 50K	14500	120	120.8	120 - 277V	≥0.9	5000K	>80	50000	14.2	9.2	7.4
WP12000140PC	LED Wall Pack - Non Dim 40K W/PC	14500	120	120.8	120 - 277V	≥0.9	4000K	>80	50000	14.2	9.2	7.4
WP12000150PC	LED Wall Pack - Non Dim 50K W/PC	14500	120	120.8	120 - 277V	≥0.9	5000K	>80	50000	14.2	9.2	7.4