
Elements



TCP's LED Security Light combines the look of a traditional barn light with the benefits of LED. An efficient alternative to HID, these security lights deliver bright uniform light while providing energy savings. A long 50,000 hour rated life significantly decreases maintenance labor and material costs over the life of the fixture.

The robust die-cast aluminum housing incorporates an impact resistant acrylic lens. An integrated button photocell is standard for dusk-to-dawn control. The security light mounts directly to a wall or horizontal arm up to 1.5/8" O.D. for easy installation or retrofit of traditional luminaires.

- Site Lighting
- Security Lighting
- Entrances
- Perimeters

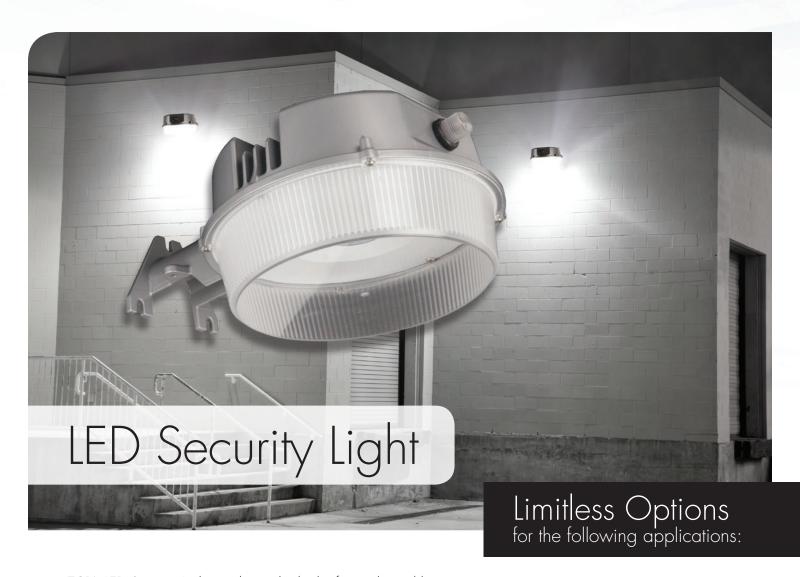







Applications

This product family can be effectively used in outdoor wall mount or horizontal arm mount locations. Commercial, industrial, and rural exterior lighting; parking lot, cargo door, high wall, area and security.

Construction

- Die-cast aluminum housing
- Impact resistant acrylic lens
- Durable silver powdercoat
- Mounts to a wall or horizontal arm up to 1 5/8" O.D.

Electrical

- cULus wet location rated
- Easily access wiring for quick installation
- System rated for long 50,000 hour life
- Efficiently delivers up to 140 LPW

Optics

- Prismatic acrylic lens
- · Delivers bright, white light and excellent uniformity




Listings

cULus Listed – wet location rated RoHS Compliant


Warranty

Five year limited warranty against defects in manufacturing

Dimensions



Weight 27W: 2.205lb 40W: 2.403lb



10.82" (275mm)





LED Security Light Available Part Numbers **POWER** LIFE (HRS) DLC **LUMENS** WATTAGE **LPW VOLTAGE FACTOR CCT CRI** (IN) (IN) (IN) Item # Description RSLUA140KPCSV 3,800 27 141 120 - 277 4000K 50,000 10.82 4.33 LED Security Light Non Dim Yes > 0.9 >70 8.07 Button PC 40K LED Security Light Non Dim Button PC 50K RSLUA 1 5 OKPCSV 3,900 27 144 120 - 277 > 0.9 5000K 50,000 10.82 4.33 8.07 Yes >70 RSLUA240KPCSV 120 - 277 10.82 5,500 40 138 > 0.9 50,000 4.33 8.07 LED Security Light Non Dim 4000K >70 Yes Button PC 40K 143 120 - 277 > 0.9 5000K >70 50,000 10.82 4.33 RSLUA250KPCSV LED Security Light Non Dim 5,700 40 8.07 Button PC 50K

