



# LED High Lumen PAR Lamp

**ENERGY SAVINGS • 25,000 HOURS • 5 YEAR WARRANTY**

TCP's LED High Lumen PAR lamp combines traditional beauty with top-notch technology for wherever bright light is needed.

## LIMITLESS OPTIONS FOR THE FOLLOWING APPLICATIONS

- Outdoor spaces
- Security
- Barns
- Garages

## FEATURES

Up to 85% more efficient than incandescent/halogen replacements

Long life: 25,000 hours

Smooth dimming

Approved for wet location

Replaces 250w Par Halogen

Available in Flood, Narrow Flood, and Spot Beam Angles

## BENEFITS

Instant energy savings

Minimizes replacement and maintenance costs

Creates just the right light

Can be used outdoors

## SPECIFICATIONS

|                            |                                       |
|----------------------------|---------------------------------------|
| Color Temperatures .....   | 2700K; 3000K; 3500K; 4100K; 5000K     |
| Input Line Voltage .....   | 120V                                  |
| Input Line Frequency ..... | 50/60HZ                               |
| Lamp Life (Rated) .....    | 25,000 hours                          |
| Beam Angle .....           | 15° Spot; 25° Narrow Flood; 40° Flood |
| CRI .....                  | 80                                    |

we know light.™



5 YEAR WARRANTY


RoHS COMPLIANT



# LED High Lumen PAR Lamps

**ENERGY SAVING • 25,000 HOURS • 5 YEAR WARRANTY**

| ITEM #                                 | DESCRIPTION                   | VOLTAGE     | LED WATTS | WATTAGE EQUIVALENT | LUMENS      | LPW        | CRI       | COLOR TEMP   | BEAM ANGLE | BASE       |
|--|-------------------------------|-------------|-----------|--------------------|-------------|------------|-----------|--------------|------------|------------|
| <b>LED P38 30W</b>                     |                               |             |           |                    |             |            |           |              |            |            |
| <b>15° Spot • 25,000 hours</b>         |                               |             |           |                    |             |            |           |              |            |            |
| L30P38D2527KSP                         | LED 30W P38 DIM 27K SP        | 120V        | 30        | 250                | 2700        | 90         | 80        | 2700K        | 15°        | E26        |
| <b>L30P38D2530KSP</b>                  | <b>LED 30W P38 DIM 30K SP</b> | <b>120V</b> | <b>30</b> | <b>250</b>         | <b>3000</b> | <b>100</b> | <b>80</b> | <b>3000K</b> | <b>15°</b> | <b>E26</b> |
| L30P38D2535KSP                         | LED 30W P38 DIM 35K SP        | 120V        | 30        | 250                | 3000        | 100        | 80        | 3500K        | 15°        | E26        |
| L30P38D2541KSP                         | LED 30W P38 DIM 41K SP        | 120V        | 30        | 250                | 3000        | 100        | 80        | 4100K        | 15°        | E26        |
| L30P38D2550KSP                         | LED 30W P38 DIM 50K SP        | 120V        | 30        | 250                | 3000        | 100        | 80        | 5000K        | 15°        | E26        |
| <b>25° Narrow Flood • 25,000 hours</b> |                               |             |           |                    |             |            |           |              |            |            |
| L30P38D2527KNFL                        | LED 30W P38 DIM 27K NFL       | 120V        | 30        | 250                | 2700        | 90         | 80        | 2700K        | 25°        | E26        |
| L30P38D2530KNFL                        | LED 30W P38 DIM 30K NFL       | 120V        | 30        | 250                | 3000        | 100        | 80        | 3000K        | 25°        | E26        |
| L30P38D2535KNFL                        | LED 30W P38 DIM 35K NFL       | 120V        | 30        | 250                | 3000        | 100        | 80        | 3500K        | 25°        | E26        |
| L30P38D2541KNFL                        | LED 30W P38 DIM 41K NFL       | 120V        | 30        | 250                | 3000        | 100        | 80        | 4100K        | 25°        | E26        |
| L30P38D2550KNFL                        | LED 30W P38 DIM 50K NFL       | 120V        | 30        | 250                | 3000        | 100        | 80        | 5000K        | 25°        | E26        |
| <b>40° Flood • 25,000 hours</b>        |                               |             |           |                    |             |            |           |              |            |            |
| L30P38D2527KFL                         | LED 30W P38 DIM 27K FL        | 120V        | 30        | 250                | 2700        | 90         | 80        | 2700K        | 40°        | E26        |
| L30P38D2530KFL                         | LED 30W P38 DIM 30K FL        | 120V        | 30        | 250                | 3000        | 100        | 80        | 3000K        | 40°        | E26        |
| L30P38D2535KFL                         | LED 30W P38 DIM 35K FL        | 120V        | 30        | 250                | 3000        | 100        | 80        | 3500K        | 40°        | E26        |
| L30P38D2541KFL                         | LED 30W P38 DIM 41K FL        | 120V        | 30        | 250                | 3000        | 100        | 80        | 4100K        | 40°        | E26        |
| L30P38D2550KFL                         | LED 30W P38 DIM 50K FL        | 120V        | 30        | 250                | 3000        | 100        | 80        | 5000K        | 40°        | E26        |

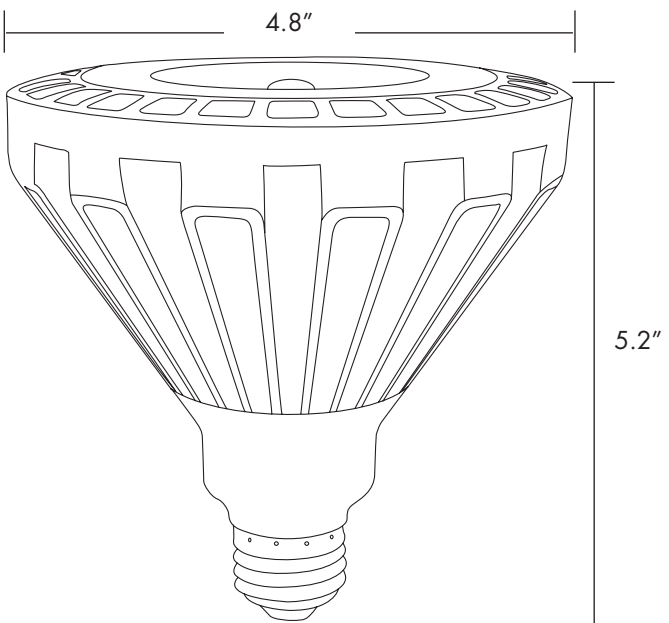

**5** YEAR WARRANTY

**RoHS** COMPLIANT