

# Features & Specifications



## LED WRAPAROUND

**INTENDED USE** – These surface mounted PLT LED wraparound fixtures deliver light downwards for directional illumination. It consumes less power and lasts longer than their fluorescent equivalents, saving money on energy costs. The PLT wraparound fixtures can be used in a variety of locations around your home or business.

**CONSTRUCTION** – 22 Gauge cold-rolled steel housing with a low-glare frosted lens. White enamel finish.

**OPTICS** – Integrated LED strip provides low-glare light distribution through a frosted lens for an even and consistent light.


**ELECTRICAL** – Hardwire installation. Built-in LED driver. Issues commonly associated with ballast driven fixtures such as humming, flickering, and failures are eliminated. 120 Volt.

**INSTALLATION** – Refer to included installation instructions

**LISTINGS** – Fixture is IP40 rated; protected from tools and small wires greater than 1 millimeter. Not protected from water. LED T8 tubes are UL and ETL listed to safety standards for damp locations.

**MOUNTING** – Suspended or surface mounting. V-hooks and chains not included.

**WARRANTY** – 3-year warranty for wraparound fixture. PLT products that are damaged or defective will be repaired or replaced at PLT's choosing for a period of 3 years. Contact 1-800-624-4488 for more information.

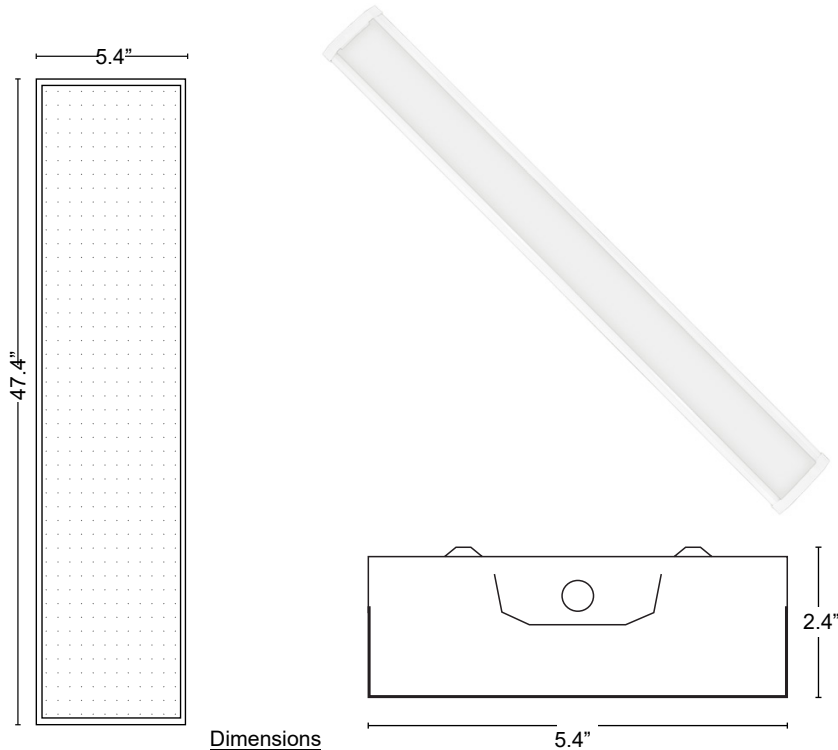

**Dimensions**  
 Width: 5.4 in.  
 Length: 47.4 in.  
 Height: 2.4 in.



- Produces a 4000 Kelvin, cool white color temperature
- Turns on instantly with no delay or flickering

SKU #	Kelvin	Lumens	CRI	Wattage	Voltage	DLC?	Mounting	Life Hours	Warranty
PLT-11670	4000	3500	80	40	120	NO	SURFACE	50000	3 Year