

Catalog Number
Notes
Type

## FEATURES & SPECIFICATIONS

### INTENDED USE

The fixed track series combines aesthetics with superior functionality for applications such as specialty retail, hospitality, residential and educational environments. Paired with an MR16 GU10 LED lamp, the mesh back track head provides high-quality, eco-friendly lighting solutions.

### CONSTRUCTION

The flush-mount fixed track series is available as a 1-lamp round lamp holder using an MR16GU10 LED lamp (included).

Track lamp holder is made of steel with a 60-degree tilt and horizontal tilt 350 degrees.

### ELECTRICAL

Adaptor: Low-profile injection-molded track mounting adaptor for easy attachment to (LTS) single circuit 120V track system.

Rated Life: 25,000 hours

### LISTINGS

ETL<sub>US</sub> listed to UL1574 Track Lighting Standard.

### WARRANTY

3-year limited warranty. Complete warranty terms located at:

[www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx).

NOTE: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

### Decorative Track Lighting


# LTKMSBK Fixed Round Flush-Mount Series

Flush Mount Fixed Track  
MR16GU10 LED Lamp



Specifications			
Lamp designation	Width	Length	Maximum height
MR16	3-3/8	3-3/8	4-5/8

All dimensions are inches (centimeters) unless otherwise indicated.



### ORDERING INFORMATION

All configurations of this product are considered "standard" and have short lead times.

**Example:** LTKMSBK MR16GU10 LED 1R 27K 90CRI BN

Series	LED, Lumen output	Spatial configuration	Color temperature	CRI	Finish
<b>LTKMSBK</b> Mesh Back flush-mount fixed track kit	<b>MR16GU10 LED</b> 4.5W, 300 lumens 5W, 380 lumens (90CRI option)	<b>1R</b> Single round head	<b>27K</b> 2700K	<b>(Blank)</b> 80 CRI <b>90CRI</b> 90 CRI <sup>1</sup>	<b>MW</b> Matte white <b>BN</b> Brushed nickel

### Replacement lamp

\*232UVK - RK1 300L MR16GU10 27K 80CRI LAMP<sup>1</sup>

### NOTES


<sup>1</sup> 90CRI option must be selected for LTKMSBK product shipping to California.

# LTKMSBK Fixed Round Flush-Mount Series

## PHOTOMETRICS

Distribution Curve	Distribution Data	Output Data	Coefficient of Utilization	Illuminance Data at 30" Above Floor for a Single Luminaire
--------------------	-------------------	-------------	----------------------------	--

LTKMSBK MW, 2700 K LEDs, input watts: 4.5, delivered lumens: 341, LM/W = 76, test no. LTL28656, tested in accordance with IESNA LM 79-08

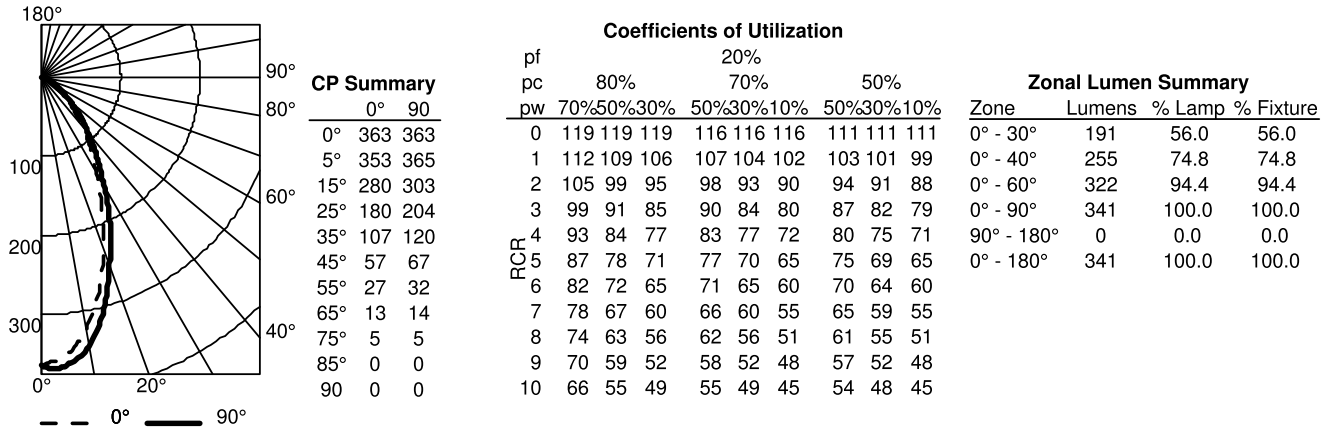

LTKMSBK 90CRI MW, 2700 K LEDs, input watts: 5, delivered lumens: 389, LM/W = 77.8, test no. ISF 36854, tested in accordance with IESNA LM 79-08

