

# Industra

by TCP

## LED UFO High Bay Luminaires



TCP's easy-to-install LED UFO High Bay Luminaires have a sleek, robust design that meets a variety of application needs.

Combining long life and outstanding efficacy up to 145LPW, TCP offers a cost effective solution to maximize energy and maintenance savings. These LED luminaires instantly deliver brilliant white light, eliminating long warm-up times experienced with HID fixtures.

### Reasons to choose the LED UFO High Bay Luminaires from TCP

Energy efficient design delivers up to 145 LPW

Smooth, uniform 0-10V dimming

Instant on

Long life: 50,000 hours

Heavy duty die-cast aluminum housing

IP65 wet location rated

### Ideal Applications

- Warehouses & Distribution Centers
- Commercial Facilities
- Aisles (Open & Stock)
- Retailers
- Schools & Municipalities
- Field Houses & Gymnasiums
- Open Ceiling Designs



5 YEAR WARRANTY

To view our DLC qualified products, please consult the DLC Qualified Products List at [www.designlights.org/qpl](http://www.designlights.org/qpl)

## Applications

This product can be effectively used in many indoor applications such as Convention Centers, Warehouses, Commercial Facilities, Retail Stores, Schools, Gymnasiums, or any open ceiling design.

## Construction



- IP65 rated
- Die-cast aluminum housing
- Impact-resistant acrylic lens
- Durable black powder coat
- Hangs from an included eye bolt
- Operating temperature: -20°C - 40°C

## Electrical

- cULus wet location rated
- 6 foot power cord
- 0-10V Dimming
- Power cord and dimming leads extend from the top
- System rated for long 50,000 hour life
- Efficiently delivers up to 145 LPW

## Optics

- Clear impact-resistant acrylic lens
- Delivers bright, white light and excellent uniformity

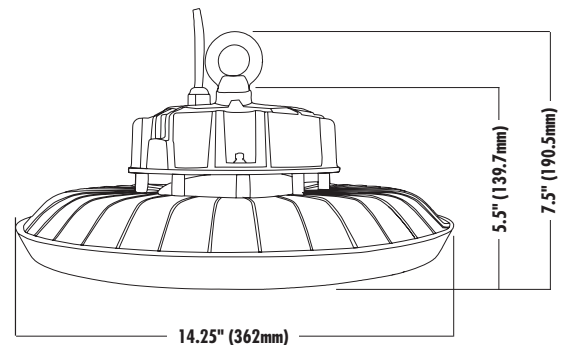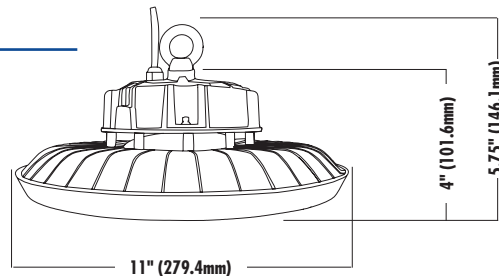

### Listings

UL and cUL listed  
IP65 Rated  
DLC v4.4 Standard

### Warranty

Five year limited warranty against defects in manufacturing.

| ITEM #      | DESCRIPTION                        | RATED LUMENS | RATED WATTAGE | RATED LPW | VOLTAGE  | POWER FACTOR | CCT   | CRI | LIFE (HOURS) | L (IN.) | H (IN.) | W (IN.) |
|-------------|------------------------------------|--------------|---------------|-----------|----------|--------------|-------|-----|--------------|---------|---------|---------|
| UFOUZDB140K | UFO HIBAY 120-277V 100W 145LPW 40K | 14000        | 100           | 140       | 120-277V | >90          | 4000K | >80 | 50,000       | 11      | 4       | 11      |
| UFOUZDB150K | UFO HIBAY 120-277V 100W 145LPW 50K | 14000        | 100           | 140       | 120-277V | >90          | 5000K | >80 | 50,000       | 11      | 4       | 11      |
| UFOUZDB240K | UFO HIBAY 120-277V 150W 145LPW 40K | 21000        | 150           | 140       | 120-277V | >90          | 4000K | >80 | 50,000       | 11      | 4       | 11      |
| UFOUZDB250K | UFO HIBAY 120-277V 150W 145LPW 50K | 21000        | 150           | 140       | 120-277V | >90          | 5000K | >80 | 50,000       | 11      | 4       | 11      |
| UFOUZDB340K | UFO HIBAY 120-277V 200W 145LPW 40K | 29000        | 200           | 145       | 120-277V | >90          | 4000K | >80 | 50,000       | 11      | 4       | 11      |
| UFOUZDB350K | UFO HIBAY 120-277V 200W 145LPW 50K | 29000        | 200           | 145       | 120-277V | >90          | 5000K | >80 | 50,000       | 11      | 4       | 11      |
| UFOUZDB440K | UFO HIBAY 120-277V 250W 145LPW 40K | 34800        | 240           | 145       | 120-277V | >90          | 4000K | >80 | 50,000       | 14.25   | 5.5     | 14.25   |
| UFOUZDB450K | UFO HIBAY 120-277V 250W 145LPW 50K | 34800        | 240           | 145       | 120-277V | >90          | 5000K | >80 | 50,000       | 14.25   | 5.5     | 14.25   |
| UFOUZDB540K | UFO HIBAY 120-277V 300W 145LPW 40K | 43500        | 300           | 145       | 120-277V | >90          | 4000K | >80 | 50,000       | 14.25   | 5.5     | 14.25   |
| UFOUZDB550K | UFO HIBAY 120-277V 300W 145LPW 50K | 43500        | 300           | 145       | 120-277V | >90          | 5000K | >80 | 50,000       | 14.25   | 5.5     | 14.25   |

