

VT4030CL-277

FEATURES

- UL 2161 listed
- Complies with CSA22.2, No 107.1 and No. 3
- Offers open and short circuit protection
- All models are self-adjusting
- Automatic overload shutdown feature
- High power factor
- Grounding foot and green wire
- ½" conduit fitting for primary wiring
- Integral sleeve GTO (length listed below)
- Utilizes standard fill pressures




SPECIFICATIONS

| | |
|---|--------------------------------|
| Input Voltage | 277 VAC (±10%) 50/60Hz |
| Input Current | 0.2A rms max. |
| Power Factor | 0.92 min. |
| Output Frequency | Variable |
| Output Voltage | 0V-4,000V |
| Output Current | 30mA |
| Operating Temperature | -30°F to 122°F / -34°C to 50°C |
| Driving Distance* (Based on Standard 12mm tube. Deduct one foot from driving footages for each pair of electrodes.) | |
| Neon | 1-10 ft (0.3-3.0 m) |
| Mercury | 1-12 ft (0.3-3.7 m) |

*See Ventex Luminous Tube Footage Chart for more information.

DIMENSIONS

| | | |
|---------------|---------|---------|
| Length (A) | 5.10 in | 13.0 cm |
| Width (B) | 1.80 in | 4.6 cm |
| Height (C) | 1.40 in | 3.6 cm |
| Mounting (D) | 4.50 in | 11.4 cm |
| Mounting (E) | 1.18 in | 3.0 cm |
| Weight | 15.0 oz | 425 g |
| Primary Leads | 36.0 in | 91.4 cm |
| GTO Leads | 24.0 in | 61.0 cm |

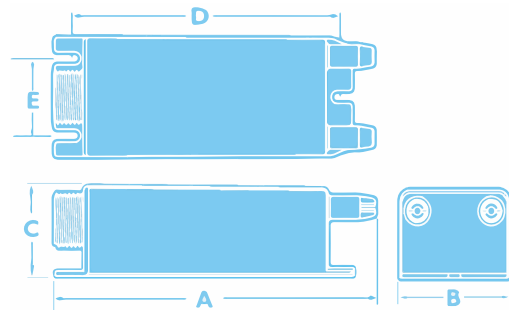

Exclusive: These units are protected by Ventex's patented protective circuitry to prevent false tripping due to capacitive current. Patent #5892646