

# LED WALL PACKS



## FEATURES

- System Light Efficacy 81 LPW
- Easy Installation & Maintenance
- IP65
- Five Years Warranty
- ETL, (5000K Only)
- Optional Shade Included for Field Installation



**50% ENERGY EFFICIENCY & LONG LIFE**  
60% MORE ENERGY EFFICIENT THAN STANDARD HID LAMPS  
TYPICAL PAYBACK OF 1 - 3 YEARS

SKU #	Kelvin	Lumens	CRI	Wattage	Voltage	DLC?	Mounting	Life Hours	Warranty
PLT-10521	5000	4860	80	60	120-277	No	WALL	54000	5 years

## ADDITIONAL PHOTOS



## FEATURES

- Easy Installation & Maintenance
- System Light Efficacy 81 LPW
- Optional Shade Included for Field Installation

## TYPICAL APPLICATIONS

- Security Lighting
- Pedestrian Lighting

## WARRANTY

**WARRANTY**      **5 Years**

## SPECIFICATIONS

### PERFORMANCE

Lightning T3C LED Chip  
 4860 Lumen Output (IES)  
 60W Power Consumption  
 81 lm/W Efficacy (IES)  
 5000K Color Temperature  
 ≥80 CRI  
 L70>54,000 hours Lumen Maintenance  
 100-277 VAC Input Voltage  
 0.95 minimum Power Factor

### ENVIRONMENTAL


IP65 Rating  
 -30 to 45°C Operating Temperature

### PHYSICAL


Dimensions (432 x 230 x 430mm)  
 Weight 9.0kg  
 Wall Mounting Options  
 Fixture Material Aluminum Alloy



## PHOTOMETRICS

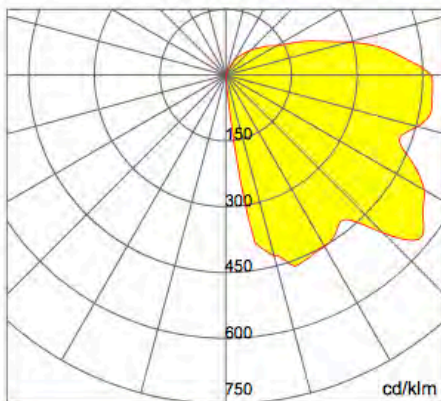

0.0~180.0

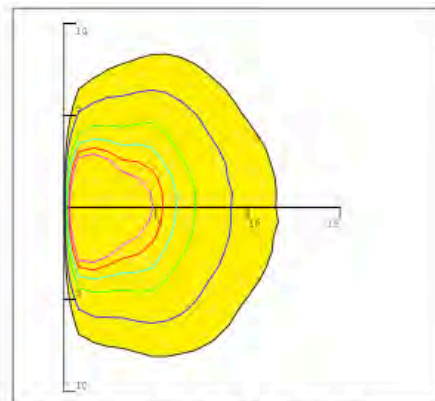

Mounting Hight 4m, 0 Tilt,  
 50LUX-5LUX

### Illumination

Height	Light Spot	LUX
4m	7×7m	131LUX
4.5m	8×8m	103LUX
5m	10×10m	83LUX
5.5m	11×11m	69LUX
6m	13×13m	58LUX