



FEATURES


- Mounting Height: 20 meters/65 feet
- System Light Efficacy 81 LPW
- Easy Installation & Maintenance
- IP65
- Five Years Warranty
- ETL, (5000K Only)
- Optional Shade Included for Field Installation



50% ENERGY EFFICIENCY & LONG LIFE
60% MORE ENERGY EFFICIENT THAN STANDARD HID LAMPS
TYPICAL PAYBACK OF 1 - 3 YEARS

SKU #	Kelvin	Lumens	CRI	Wattage	Voltage	DLC?	Mounting	Life Hours	Warranty
PLT-10307	5000	10000	80	100	100-277	No	CHAIN	100,000	5 years

ADDITIONAL PHOTOS



FEATURES

- Easy Installation & Maintenance
- System Light Efficacy 81 LPW
- Linear Design

TYPICAL APPLICATIONS

- Warehouse, Retail, Gymnasiums
- Convention Centers, Sport Arenas

WARRANTY

WARRANTY **5 Years**

SPECIFICATIONS

PERFORMANCE

Osram LED Chip
 10000 Lumen Output (IES)
 100W Power Consumption
 >100 lm/W Efficacy (IES)
 5000K Color Temperature
 ≥80 CRI
 L70>70,000 hours Lumen Maintenance
 100-277 VAC Input Voltage
 0.95 minimum Power Factor

ENVIRONMENTAL



IP65 IP Rating
 -30 to 45°C Operating Temperature
 -40 to 80°C Storing Temperature
 Humidity

PHYSICAL

Dimensions (650 x 159 x 160mm)
 Weight 4.65kg
 Chain & Surface Mounting Options
 Fixture Material Aluminum Alloy



PHOTOMETRICS

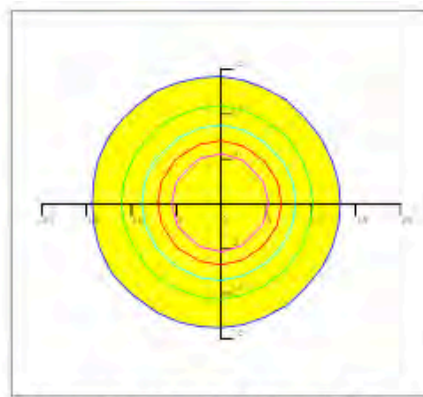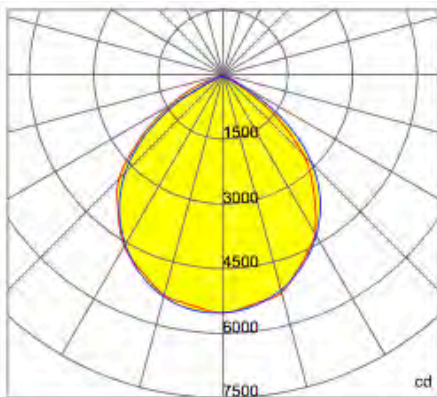

Illumination-90 Degree Beaming Angle		
Height	Beam Diameter	LUX
5m	φ 14m	132LUX
6m	φ 16m	99LUX
7m	φ 19m	76LUX
8m	φ 23m	58LUX
9m	φ 24m	46LUX