

LED WALL PACKS



FEATURES

- System Light Efficacy 81 LPW
- Easy Installation & Maintenance
- IP65
- Five Years Warranty
- ETL, (4000K Only)
- Optional Shade Included for Field Installation



50% ENERGY EFFICIENCY & LONG LIFE
60% MORE ENERGY EFFICIENT THAN STANDARD HID LAMPS
TYPICAL PAYBACK OF 1 - 3 YEARS

SKU #	Kelvin	Lumens	CRI	Wattage	Voltage	DLC?	Mounting	Life Hours	Warranty
-------	--------	--------	-----	---------	---------	------	----------	------------	----------

PLT-10699	4000	3240	80	40	120-277	No	WALL	54000	5 years
-----------	------	------	----	----	---------	----	------	-------	---------

ADDITIONAL PHOTOS



FEATURES

- Easy Installation & Maintenance
- System Light Efficacy 81 LPW
- Optional Shade Included for Field Installation

TYPICAL APPLICATIONS

- Security Lighting
- Pedestrian Lighting

WARRANTY

WARRANTY 5 Years

SPECIFICATIONS

PERFORMANCE

Lightning T3C LED Chip
 3240 Lumen Output (IES)
 40W Power Consumption
 81/m/W Efficacy (IES)
 4000K Color Temperature
 ≥80 CRI
 L70>54,000 hours Lumen Maintenance
 120-277 VAC Input Voltage
 0.95 minimum Power Factor

ENVIRONMENTAL


IP65 Rating
 -30 to 45°C Operating Temperature

PHYSICAL


Dimensions (334 x 234 x 297mm)
 Weight 5.2kg
 Wall Mounting Options
 Fixture Material Aluminum Alloy



PHOTOMETRICS

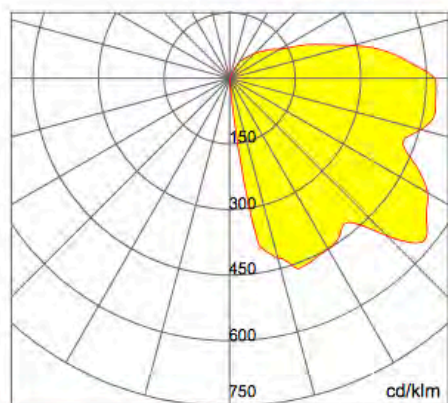

0.0~180.0

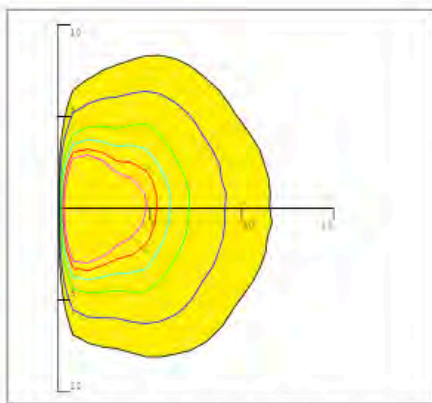

Mounting Hight 4m, 0 Tilt,
 50LUX-5LUX

Illumination

Height	Light Spot	LUX
4m	7×7m	131LUX
4.5m	8×8m	103LUX
5m	10×10m	83LUX
5.5m	11×11m	69LUX
6m	13×13m	58LUX