

LED WALL PACKS



FEATURES


- System Light Efficacy 90 LPW
- Easy Installation & Maintenance
- IP65
- Five Years Warranty
- ETL, (4000K Only)
- Optional Shade Included for Field Installation



50% ENERGY EFFICIENCY & LONG LIFE
60% MORE ENERGY EFFICIENT THAN STANDARD HID LAMPS
TYPICAL PAYBACK OF 1 - 3 YEARS

SKU #	Kelvin	Lumens	CRI	Wattage	Voltage	DLC?	Mounting	Life Hours	Warranty
PLT-10834	4000	3600	80	40	120-277	No	WALL	54000	5 years

ADDITIONAL PHOTOS



FEATURES

- Easy Installation & Maintenance
- System Light Efficacy 90 LPW
- Optional Shade Included for Field Installation

TYPICAL APPLICATIONS

- Security Lighting
- Pedestrian Lighting

WARRANTY

WARRANTY **5 Years**

SPECIFICATIONS

PERFORMANCE

3600 Lumen Output (IES)
 40W Power Consumption
 90lm/W Efficacy (IES)
 4000K Color Temperature
 ≥80 CRI
 L70>54,000 hours Lumen Maintenance
 100-277 VAC Input Voltage
 0.95 minimum Power Factor

ENVIRONMENTAL


IP65 IP Rating
 -30 to 45°C Operating Temperature

PHYSICAL


Dimensions (334 x 234 x 297mm)
 Weight 4.7kg
 Wall Mounting Options
 Fixture Material Aluminum Alloy



PHOTOMETRICS

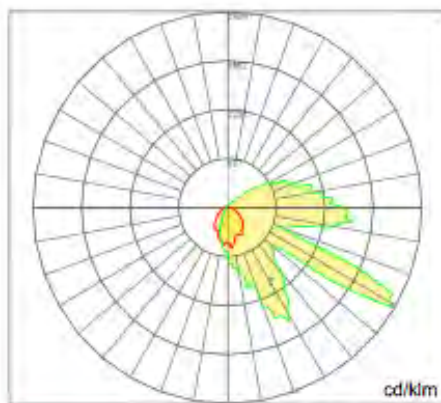

0.0~180.0

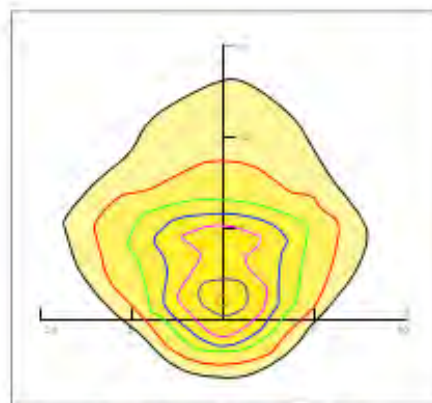

Mounting Hight 4m, 0 Tilt,
 50LUX-5LUX

Illumination

Height	Light Spot	LUX
2m	0.5×3.2m	142LUX
4m	0.9×6.4m	35.5LUX
6m	1.4×9.6m	15.8LUX
8m	1.8×12.8m	8.9LUX
10m	2.3×16.1m	5.7LUX