

## FEATURES

- System Light Efficacy 130 LPW
- Easy Installation & Maintenance
- IP65
- 5 Year Warranty
- Optional Shade Included for Field Installation
- ETL Listed



**50% ENERGY EFFICIENCY & LONG LIFE**  
60% MORE ENERGY EFFICIENT THAN STANDARD HID LAMPS  
TYPICAL PAYBACK OF 1 - 3 YEARS

SKU #	Kelvin	Lumens	CRI	Wattage	Voltage	DLC?	Mounting	Life Hours	Warranty
-------	--------	--------	-----	---------	---------	------	----------	------------	----------

PLT-10942	4000	31200	70	240	120-277	No	RING	155000	5 years
-----------	------	-------	----	-----	---------	----	------	--------	---------

## ADDITIONAL PHOTOS



## FEATURES

- Easy Installation & Maintenance
- System Light Efficacy 130 LPW
- Superior Heat Management

## TYPICAL APPLICATIONS

- Warehouse, Retail, Gymnasiums
- Convention Centers, Sport Arenas

## WARRANTY

**WARRANTY**      **5 Years**



## SPECIFICATIONS

### PERFORMANCE

Philips Lumileds LED Chip  
 31,200 Lumen Output (IES)  
 240W Power Consumption  
 ≥130 lm/W Efficacy (IES)  
 4000K Color Temperature  
 ≥70 CRI  
 L70>155,000 Hours Lumen Maintenance  
 120-277 VAC Input Voltage  
 0.95 Power Factor



### ENVIRONMENTAL

IP-65 Rating  
 -30 to 45°C Operating Temperature  
 15% to 90% RH Humidity

### PHYSICAL

Dimensions (16.1 x 16.1 x 19.7 in.)  
 Weight 12.6 lbs.  
 Hanging Ring Mounting Options  
 Fixture Material Aluminum Alloy

## PHOTOMETRICS

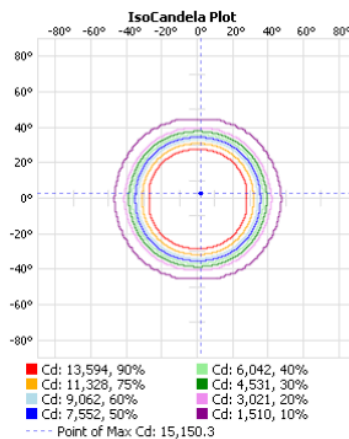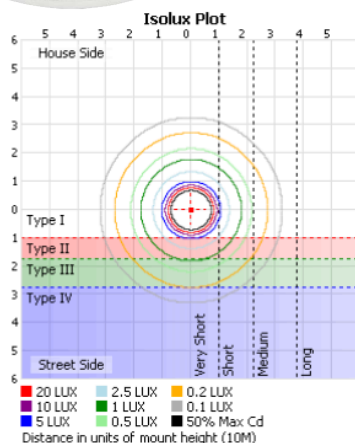

	Illuminance at a Distance		
	Center Beam LUX	Beam Width	
2.0M	3,771.6 LUX	2.8 M	2.8 M
4.0M	942.9 LUX	5.6 M	5.7 M
6.0M	419.1 LUX	8.3 M	8.5 M
8.0M	235.7 LUX	11.1 M	11.3 M
10.0M	150.9 LUX	13.9 M	14.2 M

■ Vert. Spread: 69.6°  
■ Horiz. Spread: 70.6°