

FEATURES

- System Light Efficacy 130 LPW
- Easy Installation & Maintenance
- IP65
- 5 Year Warranty
- Optional Shade Included for Field Installation
- ETL Listed



50% ENERGY EFFICIENCY & LONG LIFE
60% MORE ENERGY EFFICIENT THAN STANDARD HID LAMPS
TYPICAL PAYBACK OF 1 - 3 YEARS

| SKU # | Kelvin | Lumens | CRI | Wattage | Voltage | DLC? | Mounting | Life Hours | Warranty |
|-----------|--------|--------|-----|---------|---------|------|----------|------------|----------|
| PLT-10960 | 5000 | 31200 | 70 | 240 | 120-277 | No | RING | 155000 | 5 years |

ADDITIONAL PHOTOS



FEATURES

- Easy Installation & Maintenance
- System Light Efficacy 130 LPW
- Superior Heat Management

TYPICAL APPLICATIONS

- Warehouse, Retail, Gymnasiums
- Convention Centers, Sport Arenas

WARRANTY

WARRANTY **5 Years**



SPECIFICATIONS

PERFORMANCE

Philips Lumileds LED Chip
 31,200 Lumen Output (IES)
 240W Power Consumption
 ≥130 lm/W Efficacy (IES)
 5000K Color Temperature
 ≥70 CRI
 L70>155,000 Hours Lumen Maintenance
 120-277 VAC Input Voltage
 0.95 Power Factor



ENVIRONMENTAL

IP-65 Rating
 -30 to 45°C Operating Temperature
 15% to 90% RH Humidity

PHYSICAL

Dimensions (16.1 x 16.1 x 19.7 in.)
 Weight 12.6 lbs.
 Hanging Ring Mounting Options
 Fixture Material Aluminum Alloy

PHOTOMETRICS

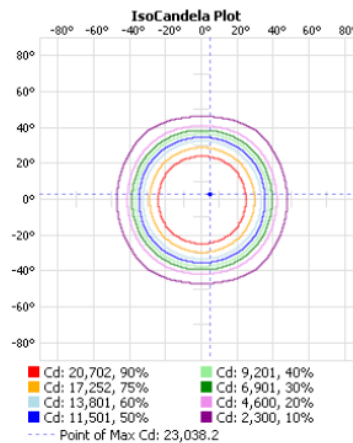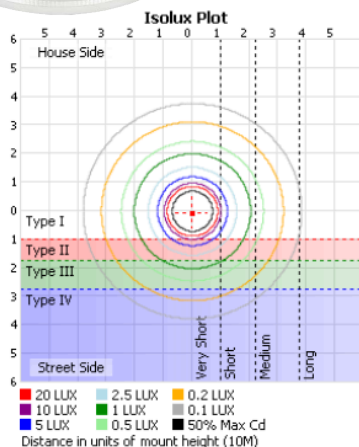

Illuminance at a Distance

| Center Beam LUX | Beam Width | |
|-----------------|------------|--------|
| 5,718.5 LUX | 2.8 M | 2.8 M |
| 1,429.6 LUX | 5.5 M | 5.6 M |
| 635.4 LUX | 8.3 M | 8.5 M |
| 357.4 LUX | 11.1 M | 11.3 M |
| 228.7 LUX | 13.9 M | 14.1 M |

■ Vert. Spread: 69.4°
 ■ Horiz. Spread: 70.4°