

LED

4 ft. Double-Ended T8 Tube




FEATURES

- Compatible with both shunted and non-shunted sockets
- Equivalent to a 32-Watt fluorescent T8 tube
- Frosted glass lens evenly diffuses light
- 5000 Kelvin daylight color temperature
- UL listed for use in damp locations
- Bi-Pin G13 base

APPLICATIONS

- Office spaces and conference rooms
- Classrooms and hallways
- Hospitals and lobbies

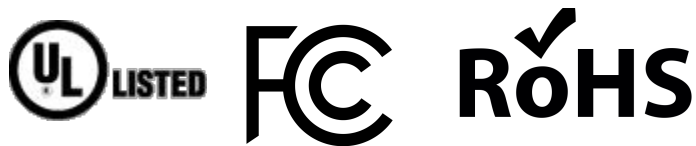

SKU#	Kelvin	Lumens	CRI	Wattage	Voltage	DLC?	Base	LED L70 Life Hours	Warranty
PLTSP32215	5000	1800	82	12	120-277	No	Bi-Pin	≥100,000	5 Years

SPECIFICATIONS

DIMMABLE	NO	LUMENS	1,800
DLC LISTED	NO	VOLTAGE	120-277
SAFETY RATING	UL DAMP	LENS	FROSTED GLASS
CRI	82	BASE TYPE	G13
COLOR	DAYLIGHT WHITE	BALLAST TYPE	BALLAST BYPASS
COLOR TEMPERATURE	5000K	DIAMETER	0.98 IN.
LED L70 LIFE HOURS	≥100,000	LENGTH	47.67 IN.
WATTAGE	12 WATTS	FLUORESCENT EQUAL.....	32 WATT