

LED

Panels

PLT &



FEATURES

- USA approved LM-80 SMD
- UL LM79 certified
- Input Voltage: 120-277 VAC 50/60Hz
- THD:<20%(at 277V)
- High lumen output, high efficiency, energy saving up to 50%
- Standard Warranty: 5 Years
- Standard Lifetime: Designed to L70 minimum 50,000 hours
- UL File Number - E485624



50% ENERGY EFFICIENCY & LONG LIFE

TYPICAL PAYBACK OF 1 - 3 YEARS

SKU #	Kelvin	Lumens	Size	Wattage	Voltage	DLC?	Mounting	Life Hours	Warranty
-------	--------	--------	------	---------	---------	------	----------	------------	----------

LEDF-10155	4000	4500	2X2	36	120-277	NO	CEILING	50000	5 years
-------------------	-------------	-------------	------------	-----------	----------------	-----------	----------------	--------------	----------------

ADDITIONAL PHOTOS

FEATURES

- Opaque Lens
- Lightweight design
- LED driver included

TYPICAL APPLICATIONS

- Schools, Factories, Hotels
- Office, Conference Rooms
- Hospitals


WARRANTY

Warranty



5 Years

SPECIFICATIONS

Dimmable	Yes
DLC Listed	No
Safety Rating	UL
CRI	80
Color.....	Cool White
Color Temperature.....	4000 Kelvin
Life Hours	50,000
Wattage	36 Watt
Lumens.....	4500
Voltage.....	120-277
Finish.....	White
Housing	Aluminum
Mounting	Ceiling Grid Mount/Suspended
Lens	Opaque
Length	23.7 in.
Height	0.35 in.
Width	23.7 in.
Weight.....	7.01 lbs.
Warranty.....	5 Years



PHOTOMETRICS

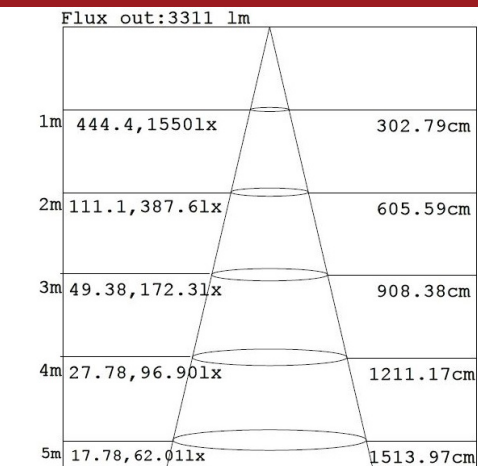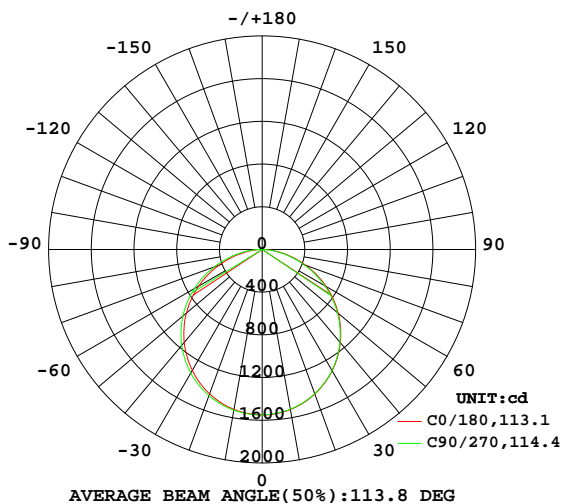

Height Eavg, Emax Angle:113.11deg Diameter
 Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.