

# LED

## Panels

# PLT



### FEATURES

- USA approved LM-80 SMD
- UL LM79 certified
- Input Voltage: 120-277 VAC 50/60Hz
- THD:<20%(at 277V)
- High lumen output, high efficiency, energy saving up to 50%
- Standard Warranty: 5 Years
- Standard Lifetime: Designed to L70 minimum 50,000 hours
- UL File Number - E485624



### 50% ENERGY EFFICIENCY & LONG LIFE

TYPICAL PAYBACK OF 1 - 3 YEARS

| SKU # | Kelvin | Lumens | Size | Wattage | Voltage | DLC? | Mounting | Life Hours | Warranty |
|-------|--------|--------|------|---------|---------|------|----------|------------|----------|
|-------|--------|--------|------|---------|---------|------|----------|------------|----------|

|                   |             |             |            |           |                |           |                |              |                |
|-------------------|-------------|-------------|------------|-----------|----------------|-----------|----------------|--------------|----------------|
| <b>LEDF-10159</b> | <b>4000</b> | <b>5000</b> | <b>2X4</b> | <b>40</b> | <b>120-277</b> | <b>NO</b> | <b>CEILING</b> | <b>50000</b> | <b>5 years</b> |
|-------------------|-------------|-------------|------------|-----------|----------------|-----------|----------------|--------------|----------------|

## ADDITIONAL PHOTOS

## FEATURES

- Opaque Lens
- Lightweight design
- LED driver included

## TYPICAL APPLICATIONS

- Schools, Factories, Hotels
- Office, Conference Rooms
- Hospitals


## WARRANTY

Warranty



5 Years

## SPECIFICATIONS

|                         |                              |
|-------------------------|------------------------------|
| Dimmable .....          | Yes                          |
| DLC Listed .....        | No                           |
| Safety Rating .....     | UL                           |
| CRI .....               | 80                           |
| Color .....             | Cool White                   |
| Color Temperature ..... | 4000 Kelvin                  |
| Life Hours .....        | 50,000                       |
| Wattage .....           | 40 Watt                      |
| Lumens .....            | 5000                         |
| Voltage .....           | 120-277                      |
| Finish .....            | White                        |
| Housing .....           | Aluminum                     |
| Mounting .....          | Ceiling Grid Mount/Suspended |
| Lens .....              | Opaque                       |
| Length .....            | 23.7 in.                     |
| Height .....            | 0.45 in.                     |
| Width .....             | 47.75 in.                    |
| Weight .....            | 14.1 lbs.                    |
| Warranty .....          | 5 Years                      |

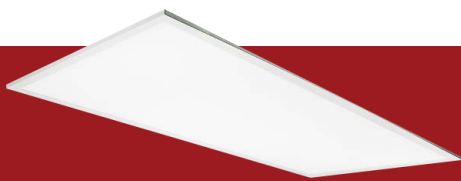

## PHOTOMETRICS

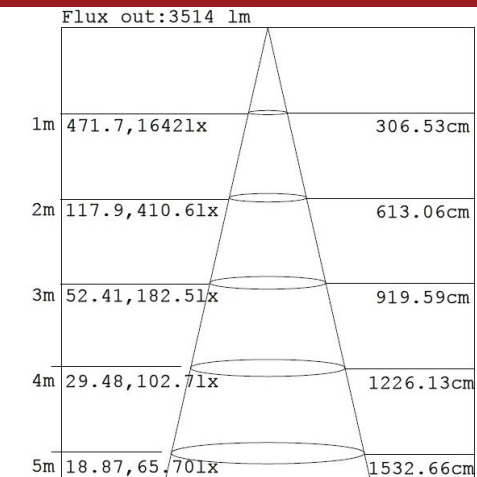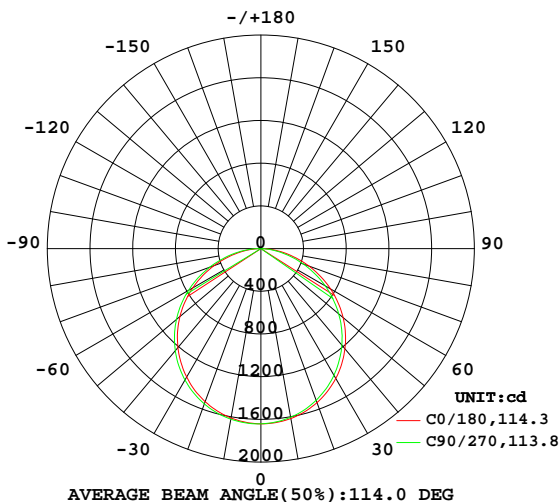

Height Eavg, Emax Angle: 113.75deg Diameter

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.