







**Questions?**

For customer service please call us at 1-310-787-3280  
Office Hours: 8:00 a.m. – 5:00 p.m. PST Monday-Friday

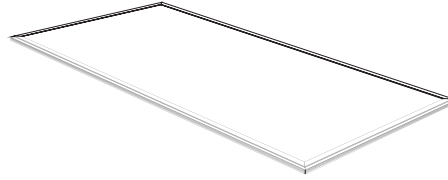

**LED Panel**  
1 ft. x 4 ft.


**PLEASE REVIEW THE INSTRUCTIONS AND WARNINGS LISTED BELOW PRIOR TO PROPER INSTALLATION**

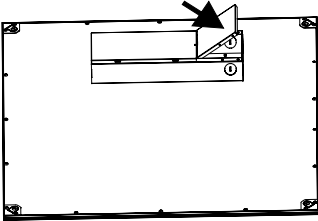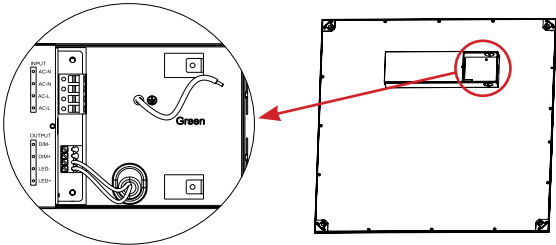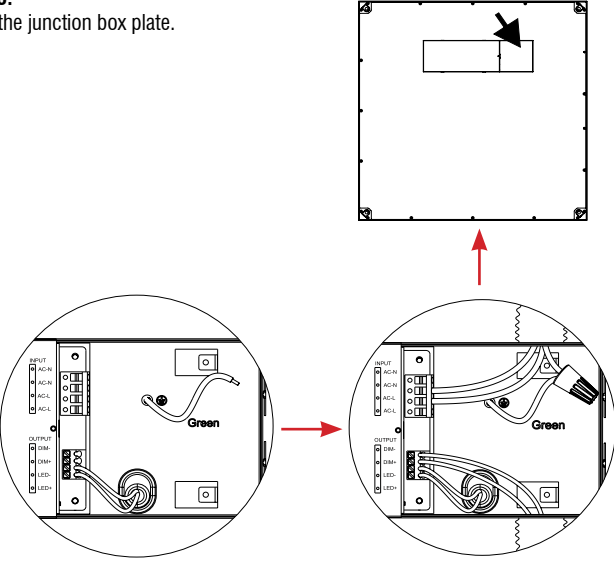WARNINGS	INSTALLATION INSTRUCTIONS - Wiring the Driver
<ul style="list-style-type: none"> <li>• Risk of fire / electrical shock .</li> <li>• LED Panel installation requires knowledge of luminaire electrical systems.</li> <li>• Risk of electric shock – disconnect power at source before installation.</li> <li>• Do not make or alter any open holes in an enclosure of wiring or electrical components during installation.</li> <li>• If lamp or luminaire exhibits abnormal operation (buzzing, flickering, minimal light, etc.), turn off power, remove luminaire and contact us. For more info. please visit <a href="http://www.eurilighting.com">www.eurilighting.com</a> or call our toll-free number 1-888-743-5766.</li> </ul>	<p><b>STEP 1:</b> Open the junction box with clips, no screw.</p> 
<p><b>FCC Notes</b></p> <p>This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment. NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:</p> <ul style="list-style-type: none"> <li>- Reorient or relocate the receiving antenna.</li> <li>- Increase the separation between the equipment and receiver.</li> <li>- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.</li> <li>- Consult the dealer or an experienced radio/ TV technician for help.</li> </ul>	<p><b>STEP 2:</b> Close the junction box plate.</p> 
<p><b>CAUTIONS</b></p> <ul style="list-style-type: none"> <li>• Do not look directly at the operating LED Panel.</li> <li>• Do not touch this product with wet hands.</li> <li>• Do not disassemble, repair or alter lamp.</li> <li>• Designed for indoor applications only.</li> <li>• Suitable for damp locations.</li> <li>• The luminaires should be grounded.</li> <li>• This device is not intended for use with emergency exits or emergency lights.</li> <li>• Please make sure the driver supply wiring is of adequate length and rating.</li> </ul> <p>Avoid any tension.</p> <ul style="list-style-type: none"> <li>• Observe proper polarity when connecting power to driver. Unit must be grounded as per code. <b>L = Input Line or Hot, W = Neutral</b></li> <li>• All connections should be according to NEC or any applicable local code.</li> <li>• Wear gloves and safety glasses every time when working with the luminaire for installing, servicing or performing maintenance.</li> </ul>	<p><b>STEP 3:</b> Close the junction box plate.</p> 




**Questions?**

For customer service please call us at 1-310-787-3280  
Office Hours: 8:00 a.m. – 5:00 p.m. PST Monday-Friday

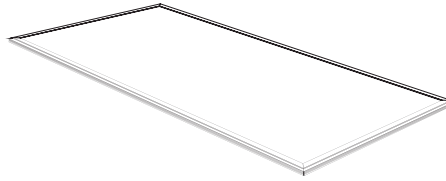


**LED Panel**  
1 ft. x 4 ft.


**Recessed Frame Installation**



1. Put the frame into the hole

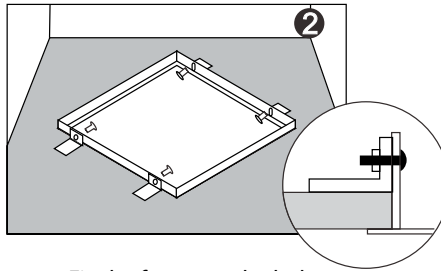

2. Fix the frame on the hole

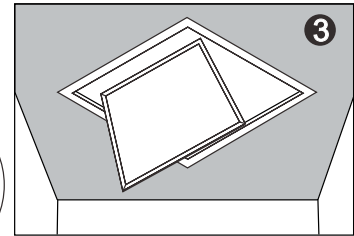


3. Put the panel into the recessed mounted frame



T-bar clips should be bent out to provide additional safety and support. Additional support means may be required by local or national codes. Hole provided may be used to further secure fixture from above.

**Notes:**


- Secure to grid per state and local codes.
- Ceiling grid must adequately support weight of fixture.

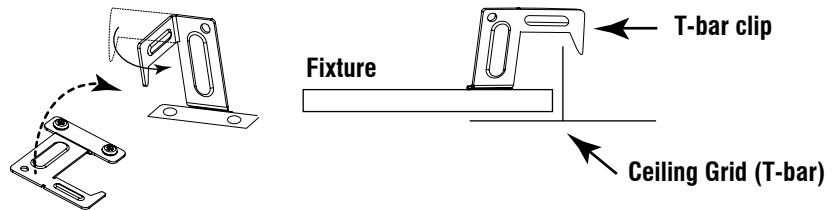


**Surfaced Frame Installation**

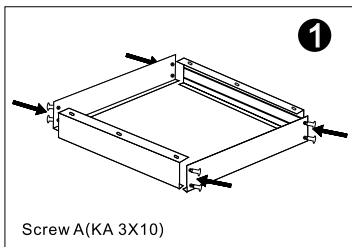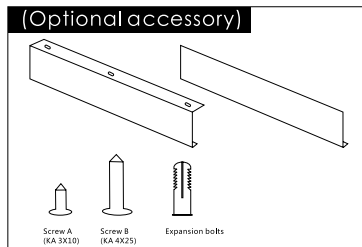


1. Assemble the four frames with Screw A to the whole square/rectangle

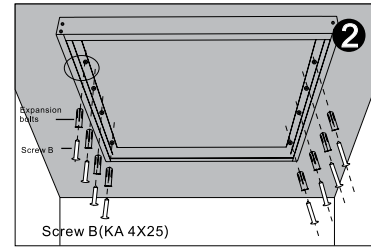


2. Fix the square/rectangle frames to the ceiling with Screw B

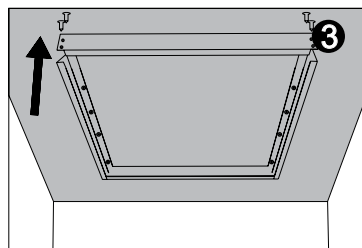

3. Demount one Frame

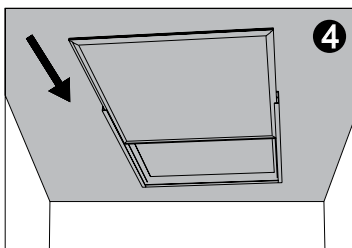

4. Put the panel into the frame square

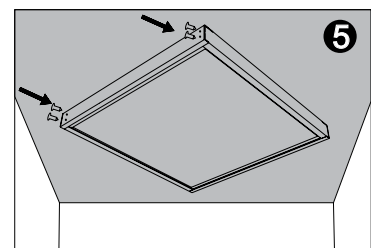

5. Fix the last frame with screw A

Product illustrations represented in this installation guide may vary in size depending on model number. Installation remains the same.