

# Features & Specifications



## LED WRAPAROUND Selectable CCT & Wattage

**INTENDED USE** – These surface mounted PLT LED wraparound fixtures deliver light downwards for directional illumination. It consumes less power and lasts longer than their fluorescent equivalents, saving money on energy costs. The PLT wraparound fixtures can be used in a variety of locations around your home or business.

**CONSTRUCTION** – Galvanized steel housing with a low-glare frosted acrylic lens. White enamel finish.

**OPTICS** – High-performance LEDs maintain a 3,900 to 5,200 Lumen output range at for 50,000 hours of use.


**ELECTRICAL** – Integral Seoul LED chips, Built-in Simon LED driver, Input voltage of 120-277 VAC. Eliminates issues commonly associated with ballast driven fixtures such as humming, flickering, and failures.

**INSTALLATION** – Refer to included installation instructions.

**LISTINGS** – UL Certified to safety standards for damp locations. Rated for -4°F to 113°F ambient temperature.


**MOUNTING** – Suspended mounting. V-hooks and chains not included.

**WARRANTY** – 3-year warranty for wraparound fixture. PLT products that are damaged or defective will be repaired or replaced at PLT's choosing for a period of 3 years. Contact 1-800-624-4488 for more information.

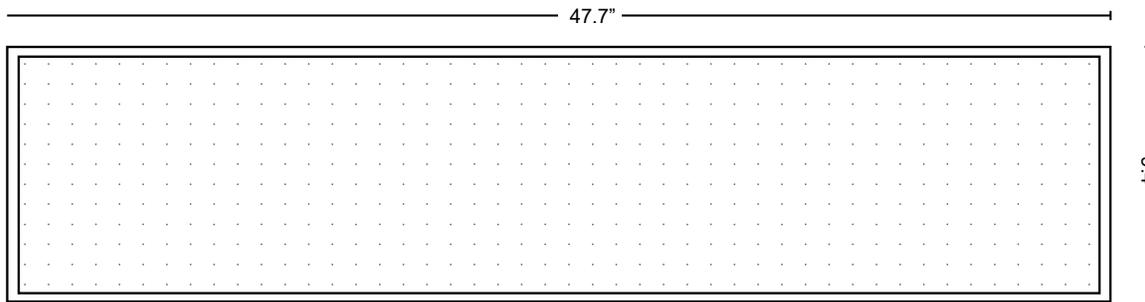

### Dimensions

- Width: 9.4 in.
- Length: 47.7 in.
- Height: 3.6 in.
- Weight: 9.1 lbs.

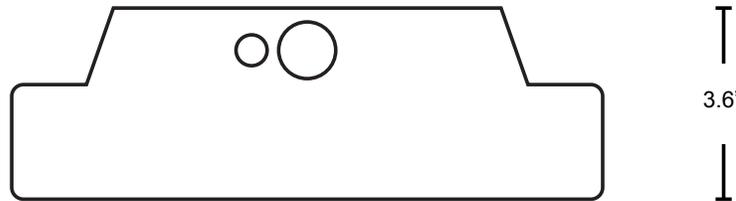

SKU #	Kelvin*	Lumens*	Wattage*	Voltage	DLC?	Mounting	Life Hours	Warranty
PLT-55617	3500/4100/5000	3900/4585/5280	30/35/40	120-277V	NO	SURFACE	50,000	3 Years

\*See Selectable Table for full breakdown

## SELECTABLE TABLE

Wattage	CCT	Lumen	Efficacy
30	3500K	4170	139
	4000K	4760	136
	5000K	5320	133
35	3500K	4200	140
	4000K	4795	137
	5000K	5360	134
40	3500K	4230	141
	4000K	4830	138
	5000K	5400	135